


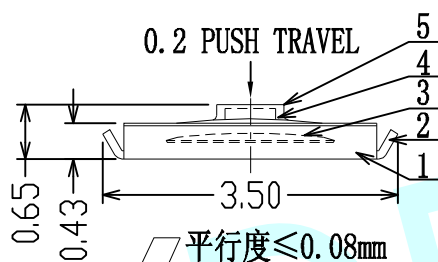
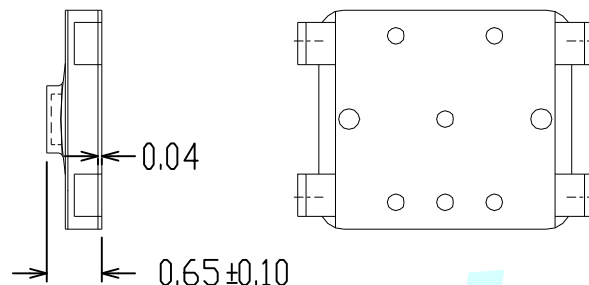
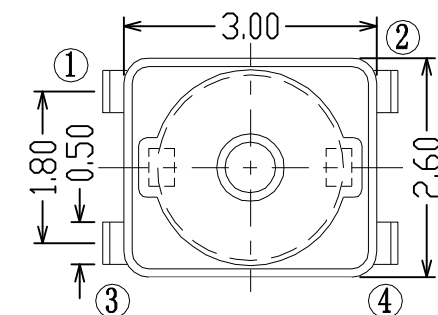
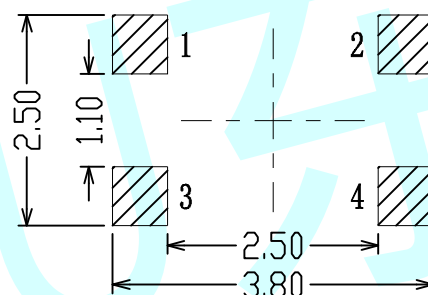


ROHS

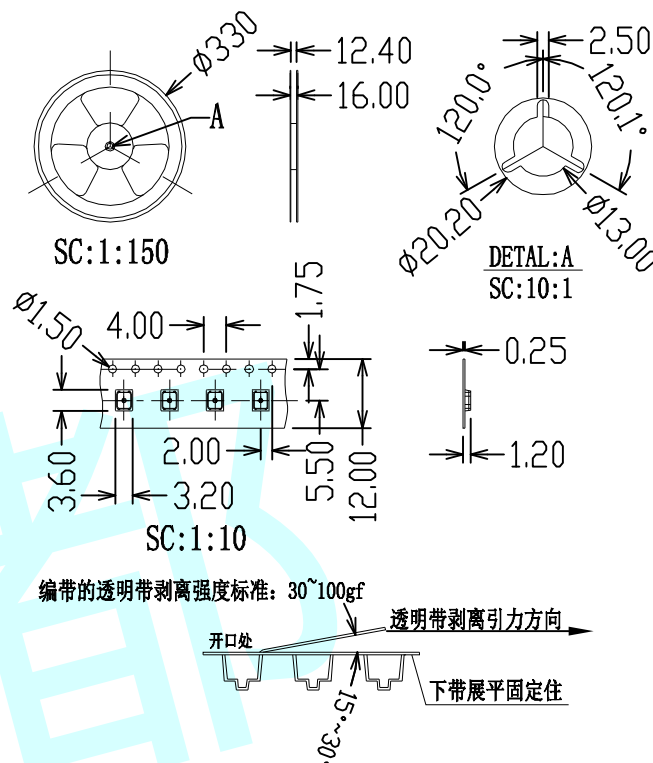

CIRCUIT DIAGRAM

Recommended PCB Layout ± 0.05 Recommended solder thickness: $T=0.10\pm 0.01$ 

NOTES:

1. Rating: DC 12V 50mA max
2. Operating force: 300 ± 50 gf
3. Travel: 0.20 ± 0.10 mm
4. Life: 300,000 cycles
5. Package: 5000 pcs/Reel

5	COVER	1	PI	YELLOW
4	KNOB	1	PI	BLACK
3	CONTACT	2	SUS	Ag-Plate
2	TERMINAL	2	PHOSPHOR BRONZE	Ag-Plate
1	CASE	1	LCP	BLACK
ITEM	PART NAME	Q' TY	MATREIAL	FINISH

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30≥	±0.30
APPOVALS:	***	****	10~30	±0.20
			5~10	±0.15
			≤5	±0.10
			±2°	
			MODEL: TACT SWITCHES	
			PART NO: DDU-1026-300G	
			UNIT :mm	SCALE: 1:1
			REV:	A
			PAGE: 1/1	

