


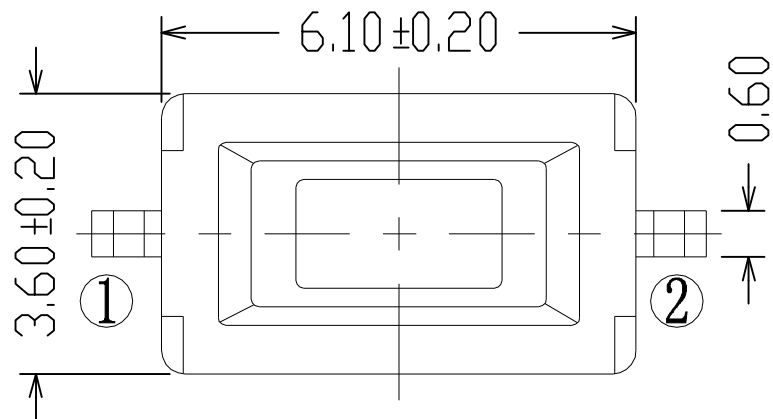


ROHS

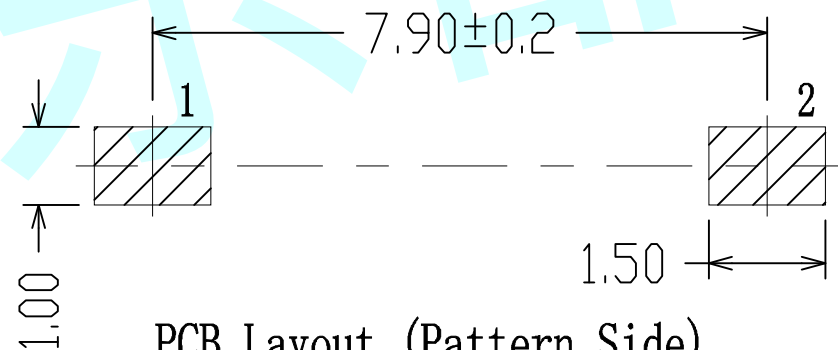

Circuit Diagram

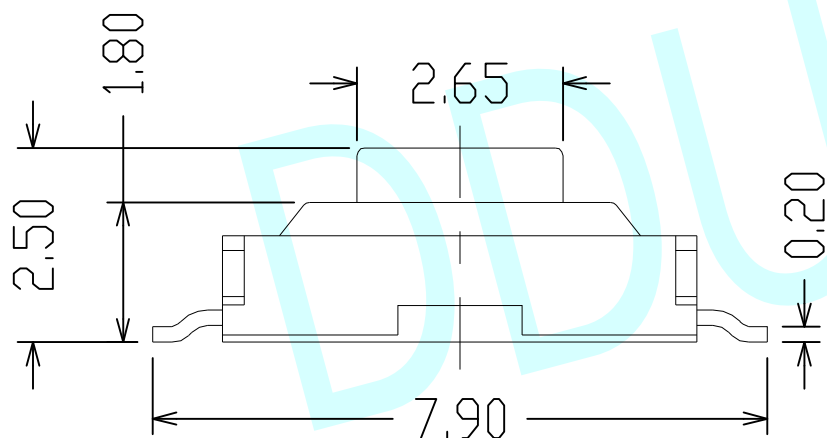

PCB Layout (Pattern Side)

NOTES:

1. Rate voltage, current: 50mA DC 12V
2. Contact resistance: $\leq 100\text{m}\Omega$
3. Travel: $0.25 \pm 0.10\text{mm}$
4. Insulated resistance: $\geq 100\text{M}\Omega$
5. Dielectric strength: $\geq 250\text{V AC/1min}$
6. Endurance: 100,000 cycles

		Stergth	90±30	130±30	180±30	250±30	350±50
APPROVALS		DATE		http://www.dongdudz.com			
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:		
CHECKED:	***	****	30≥	±0.30	±2°		
			10~30	±0.20			
			5~10	±0.15			
APPROVALS:	***	****	≤5	±0.10			
						 ® 东都电子 DONGDU ELECTRONICS	
						MODEL:	TACT SWITCHES
						PART NO:	DDU-1186T
						UNIT :mm	SCALE:1:1
						REV:	A
							PAGE: 1/1