

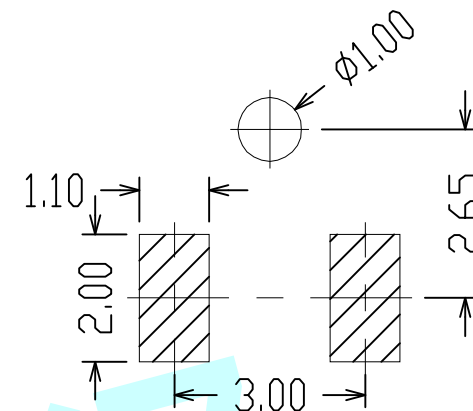
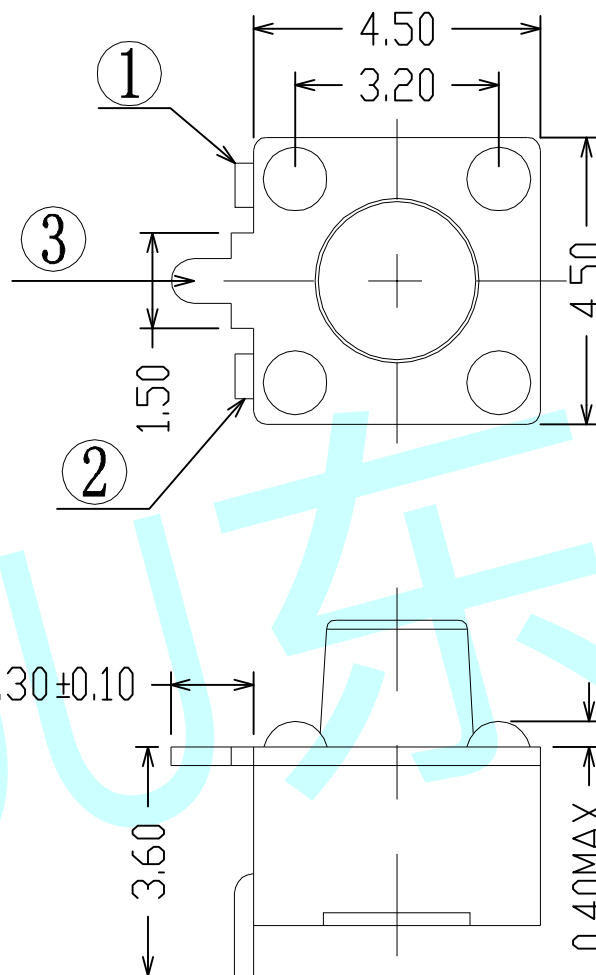


ROHS

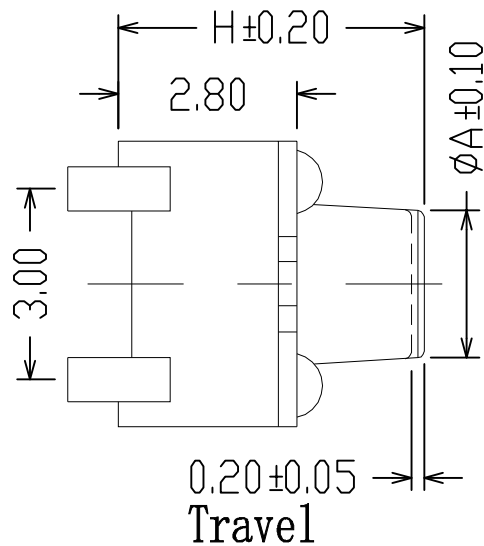

PCB LAYOUT



Circuit Diagram

NOTES:

1. Rate voltage. current: 50mA DC 12V
2. Contact resistance: $\leq 100\text{m}\Omega$
3. Travel: $0.20 \pm 0.05\text{mm}$
4. Insulated resistance: $\geq 100\text{M}\Omega$
5. Dielectric strength: $\geq 250\text{V AC/1min}$
6. Endurance: 100, 000 cycles

A	H高度
$\varnothing 2.50$	3.80
$\varnothing 2.50$	4.30
$\varnothing 2.30$	5.00
$\varnothing 2.30$	6.00
$\varnothing 2.30$	7.00
$\varnothing 2.20$	8.50
$\varnothing 2.00$	10.00

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30 $\geq$	± 0.30
APPOVALS:	***	****	10 $\sim$ 30	± 0.20
			5 $\sim$ 10	± 0.15
			≤ 5	± 0.10

 东都电子	
DONGDU ELECTRONICS	
MODEL:	TACT SWITCHES
PART NO:	DDU-20406
UNIT :mm	SCALE:1:1
REV:	A