

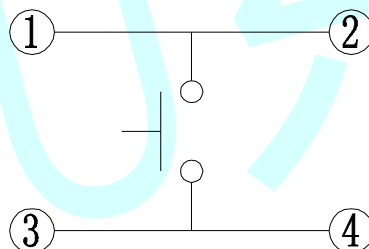
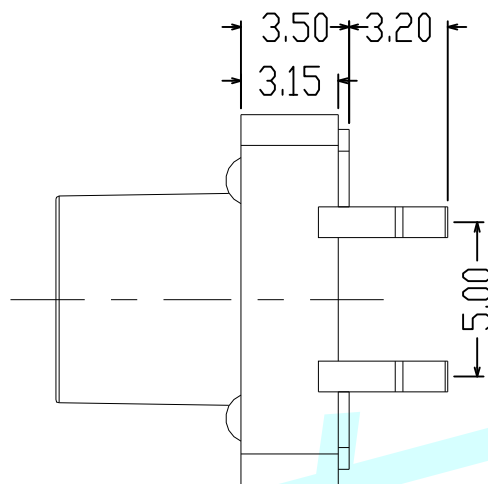
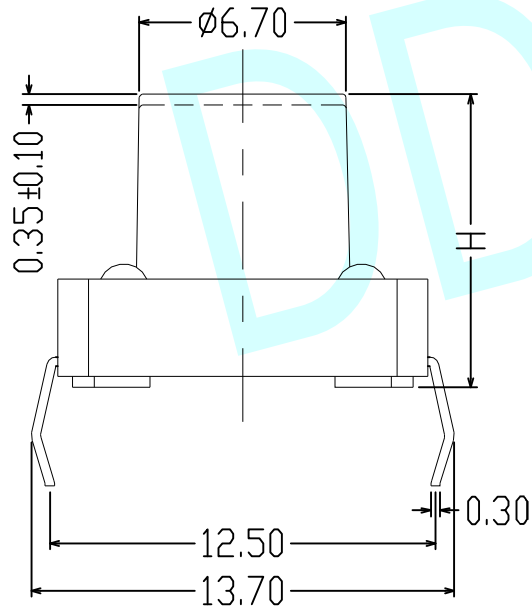


ROHS

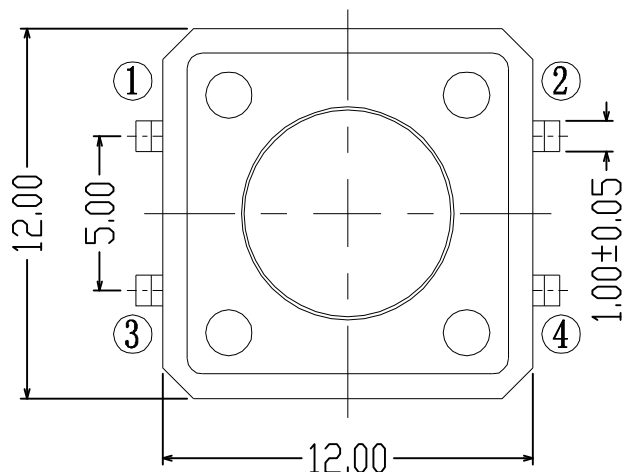

Circuit Diagram

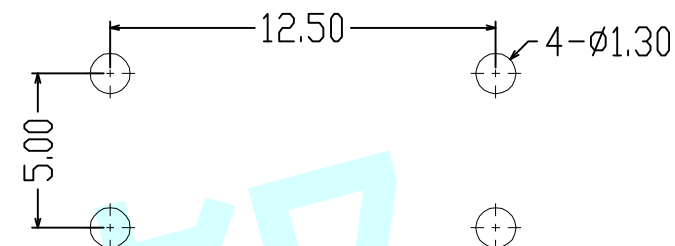

PCB Layout (Pattern Side)

NOTES:

1. Rate voltage. current: 50mA DC 12V
2. Contact resistance: $\leq 100\text{m}\Omega$
3. Travel: $0.35 \pm 0.10\text{mm}$
4. Insulated resistance: $\geq 100\text{M}\Omega$
5. Dielectric strength: $\geq 250\text{V AC/1min}$
6. Endurance: 100, 000 cycles

H	14.00	15.00	15.50	16.00	17.00	18.00	19.00			
	9.00	9.50	10.00	10.50	11.00	11.50	12.00	12.50	13.00	13.50
	4.30	4.50	5.00	5.50	6.00	6.50	7.00	7.50	8.00	8.50
Stergth	90±30		130±30		180±30		250±30		350±50	

APPROVALS		DATE	http://www.dongdudz.com			 ® 东都电子 DONGDU ELECTRONICS		
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:	 DONGDU ELECTRONICS		
CHECKED:	***	****	30≥	±0.30	±2°			
			10~30	±0.20				
			5~10	±0.15				
APPROVALS:	***	****	≤5	±0.10				
						MODEL:	TACT SWITCHS	
						PART NO:	DDU-1194S	
						UNIT :mm	SCALE:1:1	
						REV:	A	PAGE:1/1