
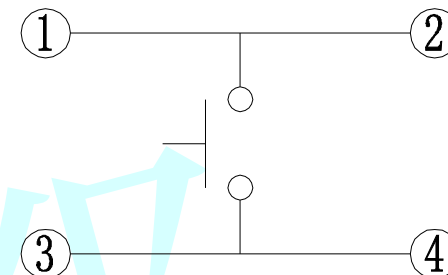
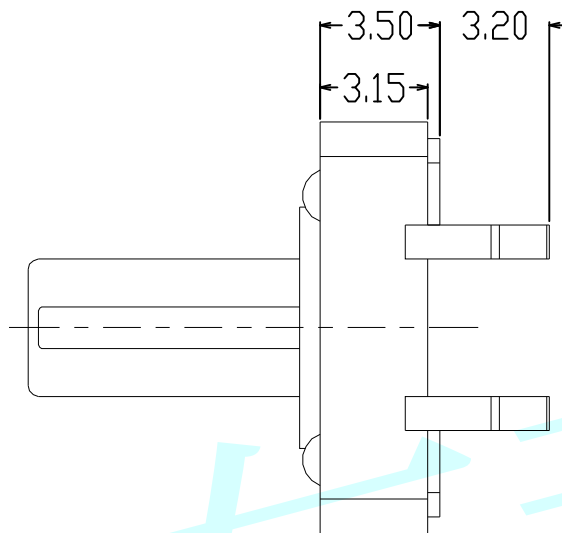
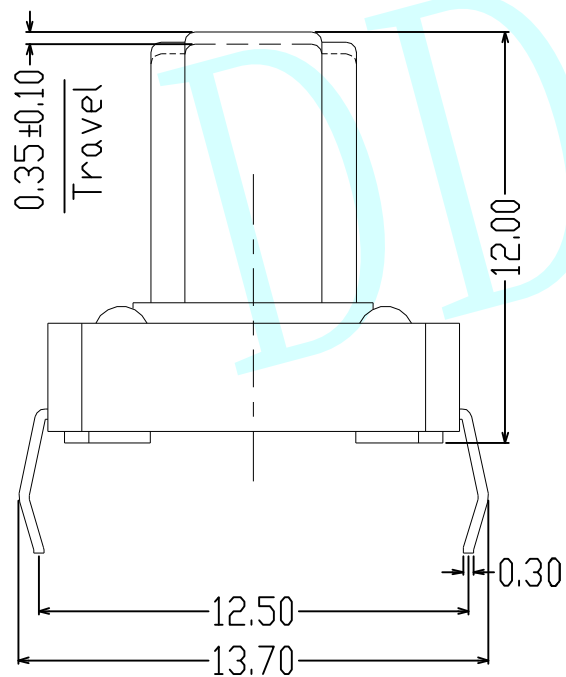


ROHS

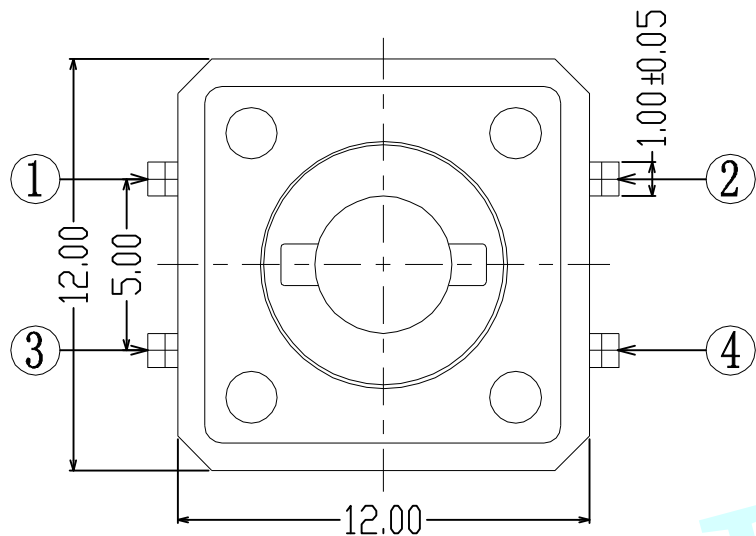


Circuit Diagram

NOTES:

1. Rate voltage,current:50mA DC 12V
2. Contact resistance: $\leq 100\text{m}\Omega$
3. Travel: $0.25 \pm 0.10\text{mm}$
4. Insulated resistance: $\geq 100\text{M}\Omega$
5. Dielectric strength: $\geq 250\text{V AC/1min}$
6. Endurance: 100, 000 cycles

PCB Layout (Pattern Side)

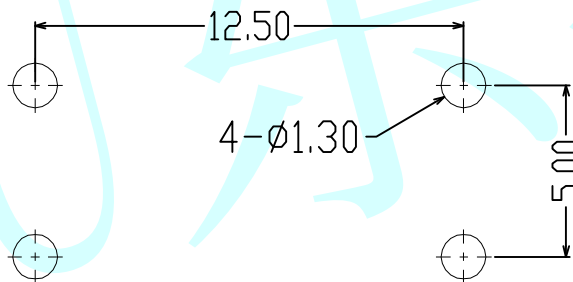

		Stergth	90±30	130±30	180±30	250±30	350±50	
APPROVALS		DATE	http://www.dongdudz.com					
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:	 东都电子 DONGDU ELECTRONICS		
CHECKED:	***	****	30≥	±0.30	±2°			
			10~30	±0.20				
APPROVALS:	***	****	5~10	±0.15				
			≤5	±0.10				
						MODEL:	TACT SWITCHS	
						PART NO:	DDU-1192	
						UNIT :mm	SCALE:1:1	
						REV:	A	PAGE:1/1