

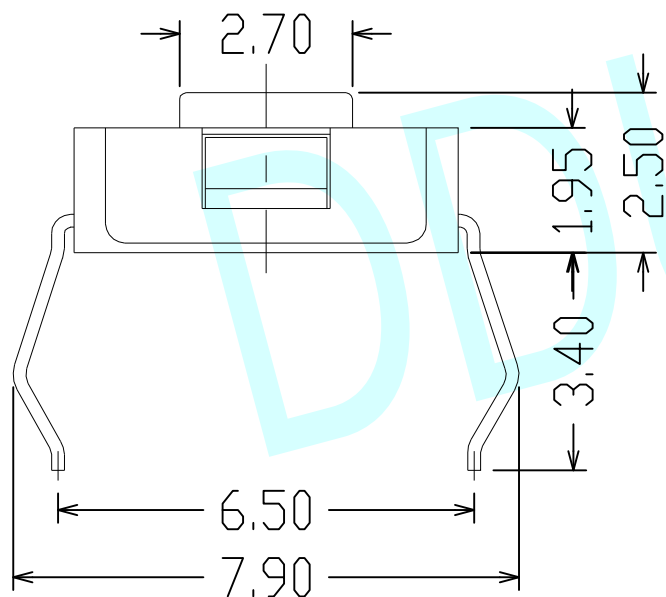
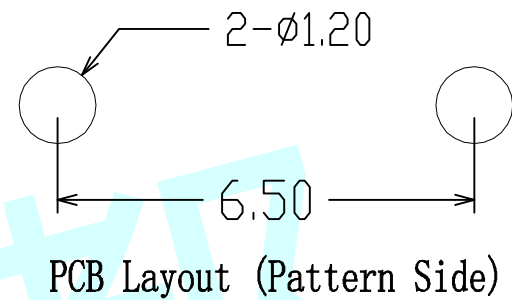
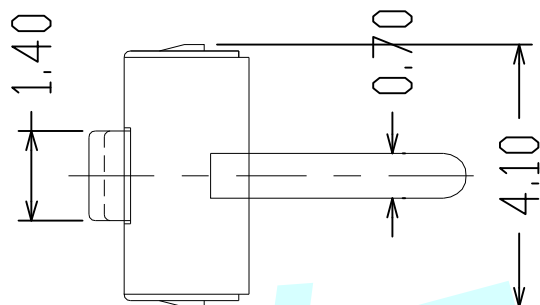


ROHS

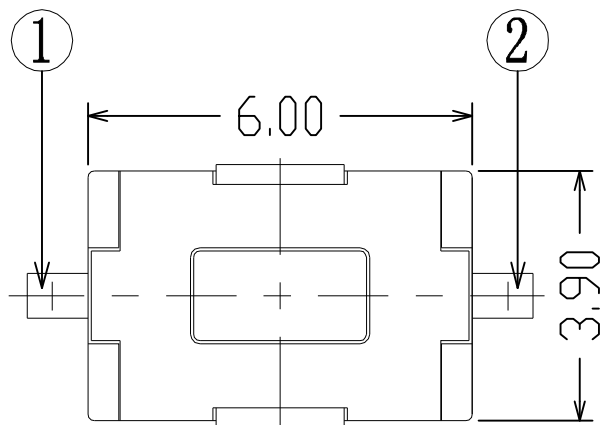

NOTES:

1. Rate voltage. current: 50mA DC 12V
2. Contact resistance: $\leq 100\text{m}\Omega$
3. Travel: $0.25 \pm 0.10\text{mm}$
4. Insulated resistance: $\geq 100\text{M}\Omega$
5. Dielectric strength: $\geq 250\text{V AC/1min}$
6. Endurance: 100, 000 cycles

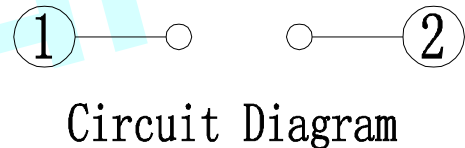

		Stergth	90±30	130±30	180±30	250±30	350±50	
APPROVALS		DATE		http://www.dongdudz.com				
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:			
CHECKED:	***	****	30≥	±0.30	±2°			
APPOVALS:	***	****	10~30	±0.20				
			5~10	±0.15				
			≤5	±0.10				
				 ® 东都电子			DONGDU ELECTRONICS	
				MODEL:		TACT SWITCHES		
				PART NO:		DDU-1188		
				UNIT :mm		SCALE:1:1		
				REV:		A	PAGE:1/1	