



ROHS

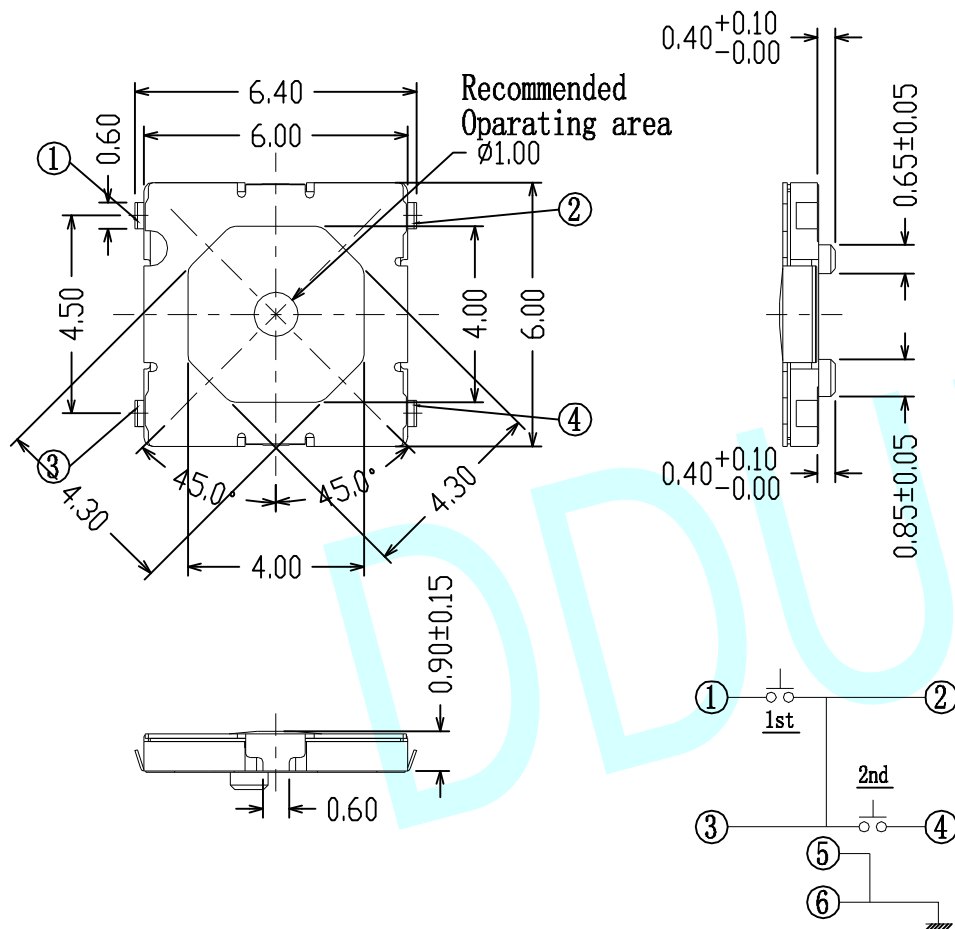

Circuit Diagram

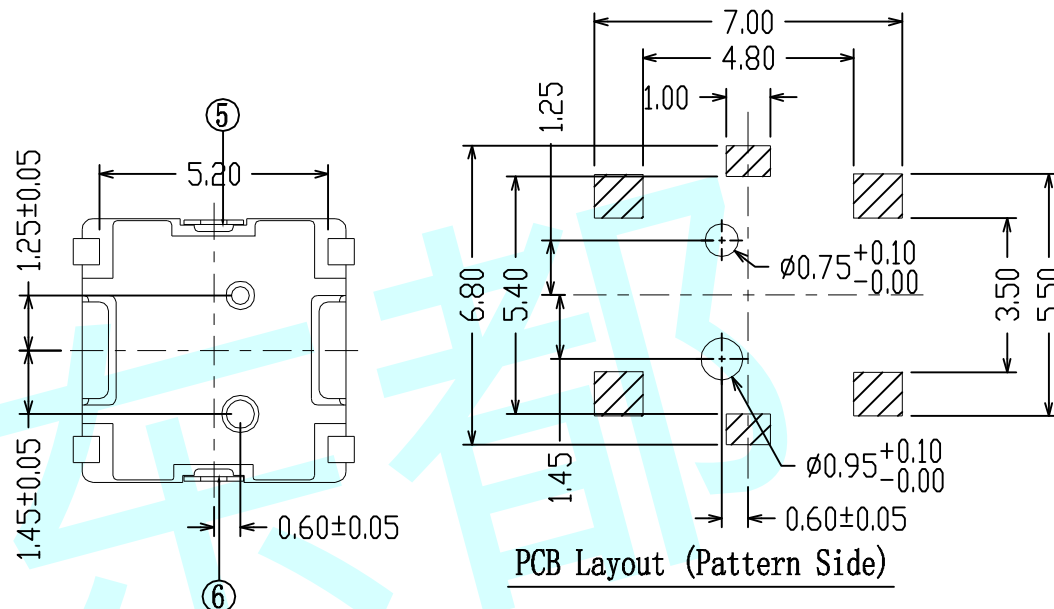

NOTES :

1. Rating :DC 12V 50mA.
2. Contact resistance:  $\leq 100\text{m}\Omega$
3. Insulation resistance:  $\geq 100\text{M}\Omega$
4. Travel: 1st  $0.25 \pm 0.10\text{mm}$ ,  $100 \pm 40\text{gf}$   
2st  $0.40 \pm 0.10\text{mm}$ ,  $250 \pm 80\text{gf}$

| APPROVALS  |     | DATE      | http://www.dongdudz.com |       |  ® 东都电子<br>DONGDU ELECTRONICS |                                                                                                                       |  |
|------------|-----|-----------|-------------------------|-------|--------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|--|
| DRAW:      | ZRD | 2017-12-6 | TOLERANCE:              |       | ANGLE:                                                                                                             | <div>MODEL: TACT SWITCHES</div> <div>PART NO: DDU-1129</div> <div>UNIT :mm SCALE:1:1</div> <div>REV: A PAGE:1/1</div> |  |
| CHECKED:   | *** | ****      | 30≥                     | ±0.30 | ±2°                                                                                                                |                                                                                                                       |  |
|            |     |           | 10~30                   | ±0.20 |                                                                                                                    |                                                                                                                       |  |
|            |     |           | 5~10                    | ±0.15 |                                                                                                                    |                                                                                                                       |  |
|            |     |           | ≤5                      | ±0.10 |                                                                                                                    |                                                                                                                       |  |
| APPROVALS: | *** | ****      |                         |       |                                                                                                                    |                                                                                                                       |  |