


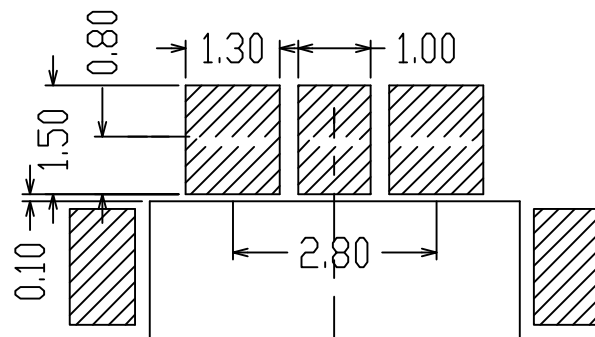



ROHS

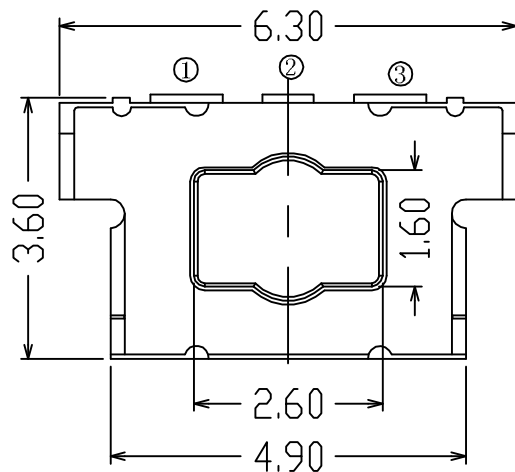

Circuit Diagram





1st Operating



2nd Operating

PCB Layout (Pattern Side)

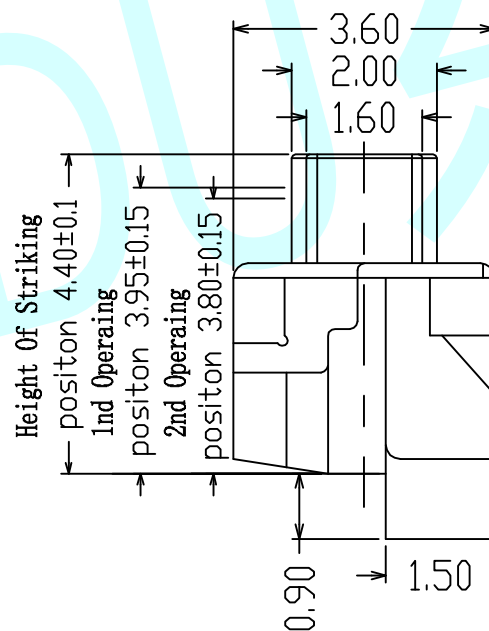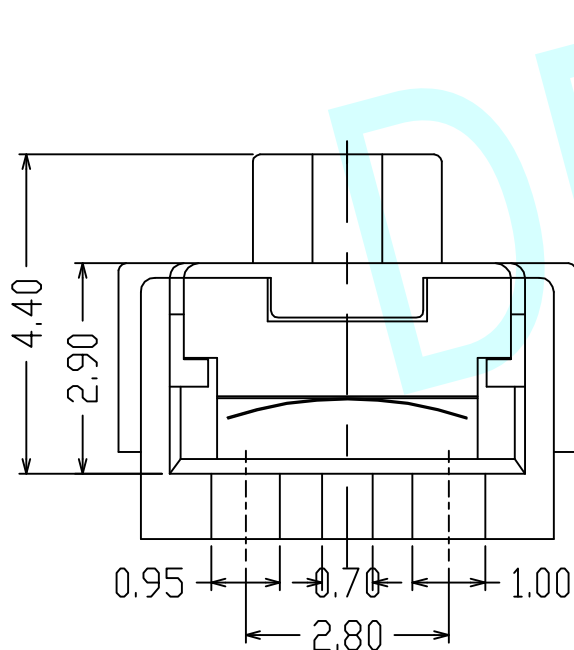

NOTES :

1. Rating :DC 12V 50mA.
2. Contact resistance: $\leq 100\text{m}\Omega$ MAX
3. Insulation resistance: $\geq 100\text{M}\Omega$ MIN
4. Travel: 1st 0.45mm 2st 0.15mm
5. Operating force: 1st $60 \pm 30\text{gf}$
2st $250 \pm 50\text{gf}$

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS	
DRAW:	ZRD	2017-12-6	TOLERANCE:			ANGLE:
CHECKED:	***	****	30≥	±0.30		±2°
			10~30	±0.20		
			5~10	±0.15		
APPROVALS:	***	****	≤5	±0.10		
MODEL:		TACT SWITCHES				
PART NO:		DDU-1117FS				
UNIT :mm		SCALE:1:1				
REV :		A		PAGE:1/1		