

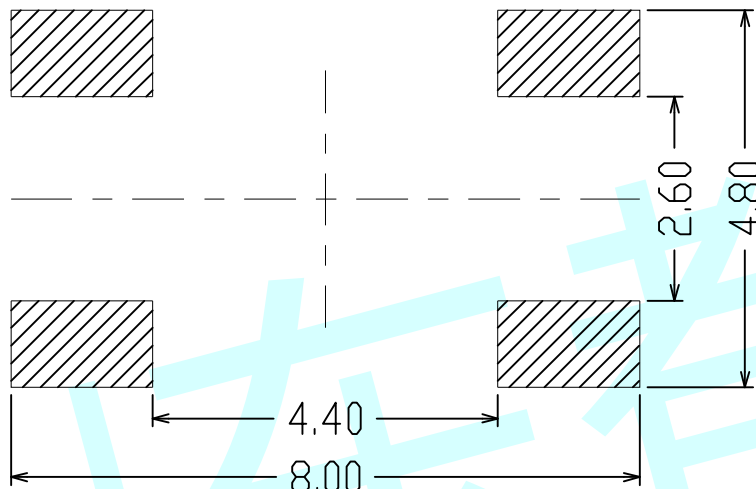

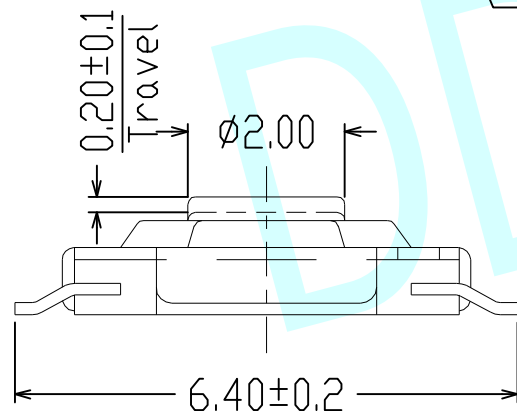
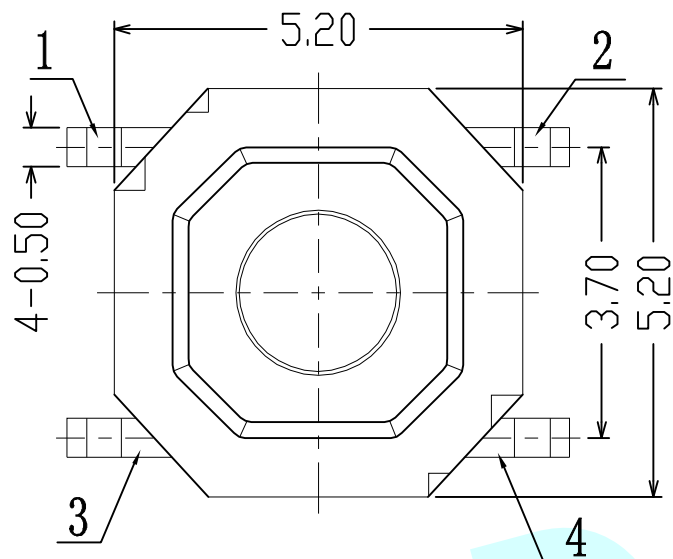


ROHS



PCB Layout (Pattern Side)

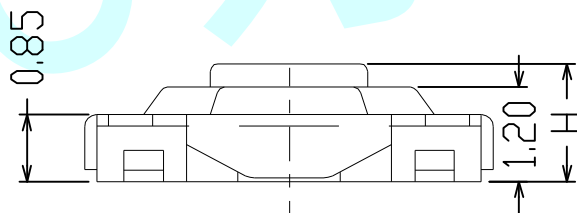

Circuit Diagram

NOTES :

1. Rating :DC 12V 50mA.
2. Contact resistance: $\leq 100\text{m}\Omega$
3. Insulation resistance: $\geq 100\text{M}\Omega$
4. Service temperature: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
5. Travel: $0.20\pm 0.10\text{mm}$

H	1.50	1.60	1.70	2.00	2.50	3.00	4.30
Stergth	90±30	130±30	180±30	250±30	350±50		

APPROVALS		DATE	http://www.dongdudz.com				 ® 东都电子 DONGDU ELECTRONIC	
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:			
CHECKED:	***	****	30≥	±0.30	±2°			
			10~30	±0.20				
			5~10	±0.15				
APPROVALS:	***	****	≤5	±0.10				
MODEL:		TACT SWITCHES						
PART NO:		DDU-1102						
UNIT :mm		SCALE:1:1						
REV:		A		PAGE:1/1				