ROHS

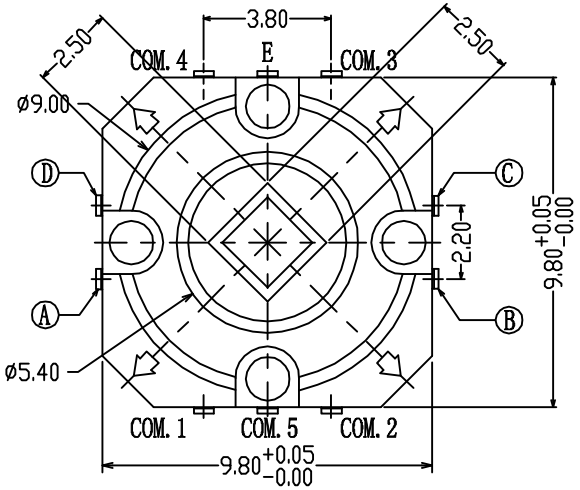

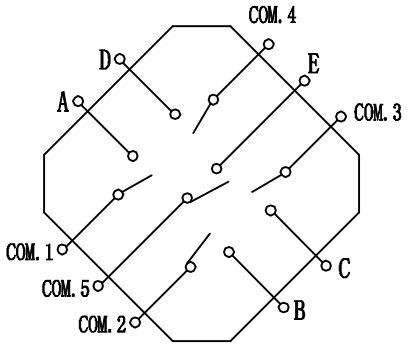

Circuit Diagram

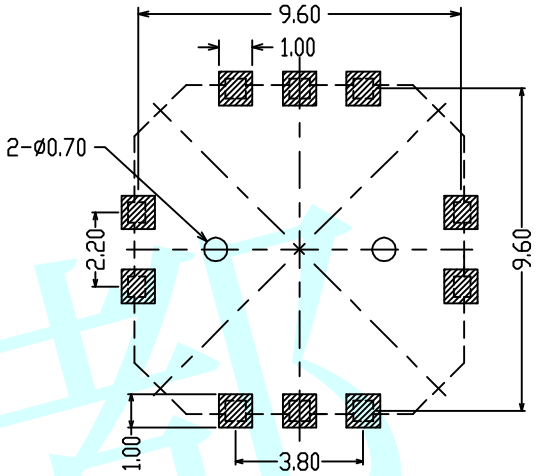

PCB Layout(Pattern Side)

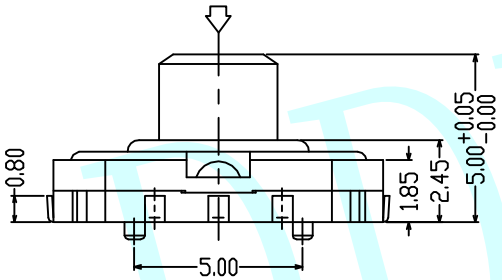

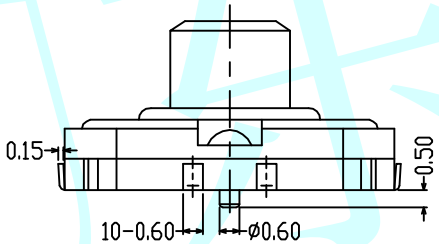

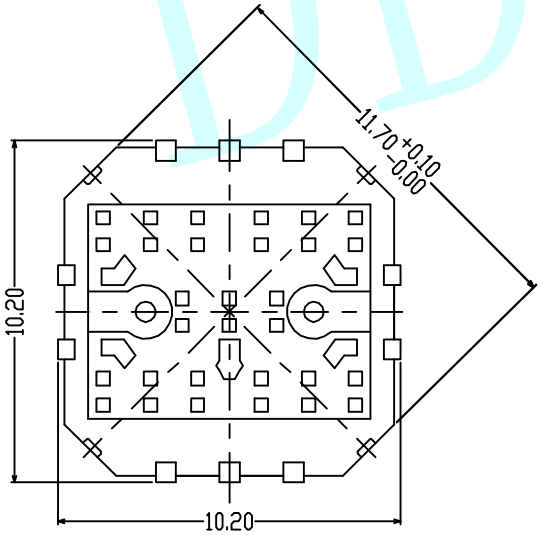

NOTES:

1. Rating:DC 12V 50mA
2. Contact resistance: 100mΩ MAX
3. Insulation resistance: 100MΩ MIN
4. Service life:200,000 cycles
5. Operating temperature: -25 ℃~+85 ℃
6. Using humidity: ≤85% RH
7. Operating power: 160/250±50gf

APPROVALS		DATE	http://www.dongdudz.com			® 东都电子 DONGDU ELECTRONICS		
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:			
CHECKED:	***	****	30≥	±0.30	±2°	MODEL:	ROCKER SWITCH	
APPOVALS:	***	****	10~30	±0.20		PART NO:	DDU-1213	
			5~10	±0.15		UNIT :mm	SCALE:1:1	
			≤5	±0.10		REV:	A	PAGE:1/1