
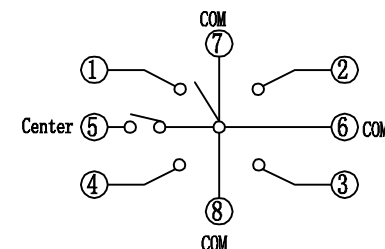
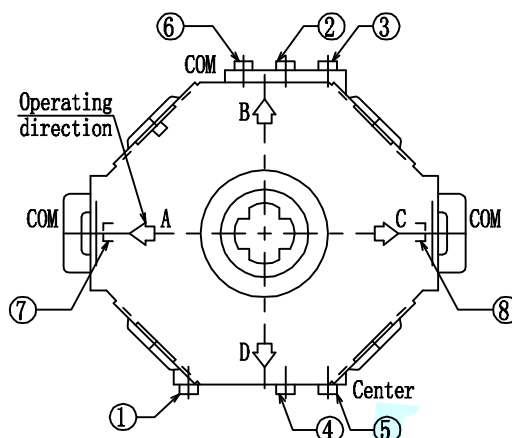






ROHS

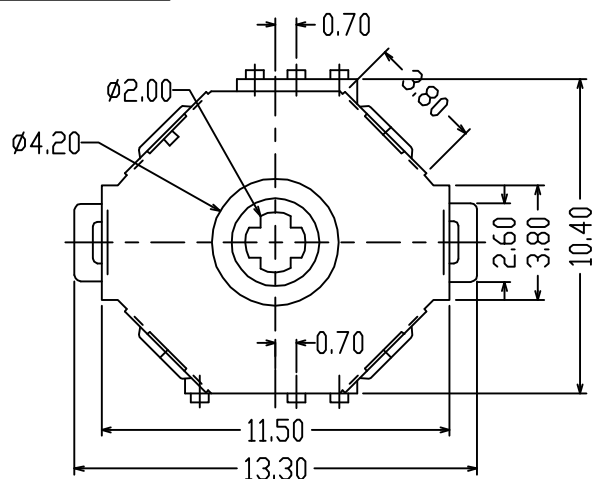

Circuit Diagram

NOTES:

1. Rating: DC 12V 50mA
2. Contact resistance: 100mΩ MAX
3. Insulation resistance: 100MΩ MIN
4. Service life: 100,000 cycles
5. Operating temperature: -25 °C ~ +85 °C
6. Using humidity: ≤85% RH
7. Operating power: 160/250 ± 35gf

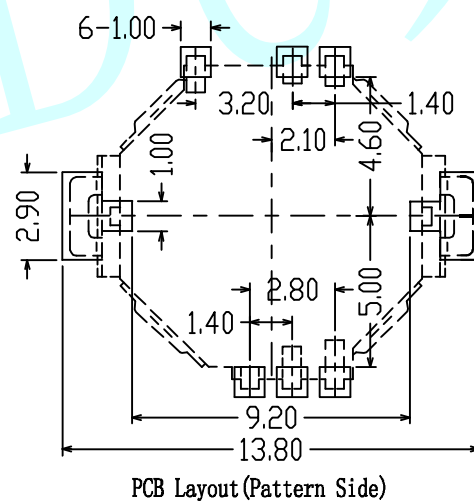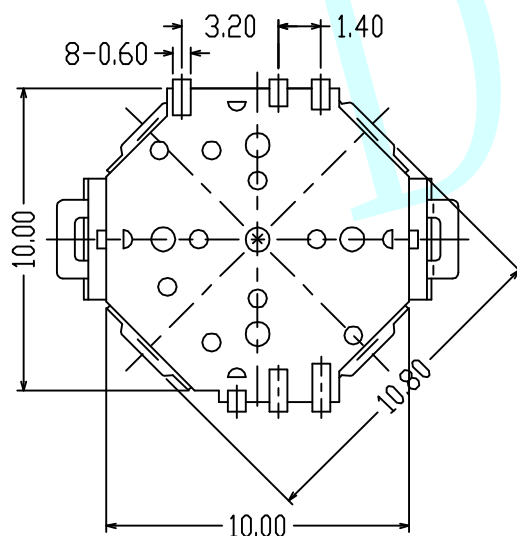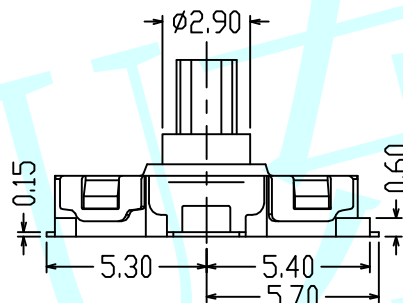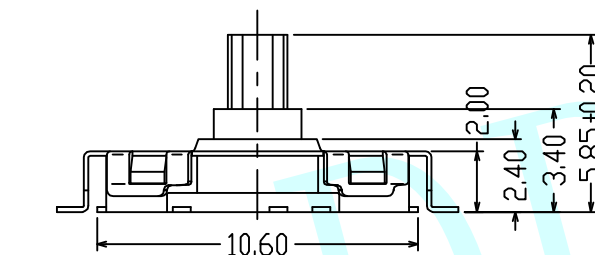

PCB Layout (Pattern Side)

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS	
DRAW:	ZRD	2017-12-6	TOLERANCE:			ANGLE:
CHECKED:	***	****	30≥	±0.30		±2°
			10~30	±0.20		
			5~10	±0.15		
APPROVALS:	***	****	≤5	±0.10		
			MODEL:		ROCKER SWITCH	
			PART NO:		DDU-1211	
			UNIT :mm		SCALE:1:1	
			REV:		A	
					PAGE:1/1	