
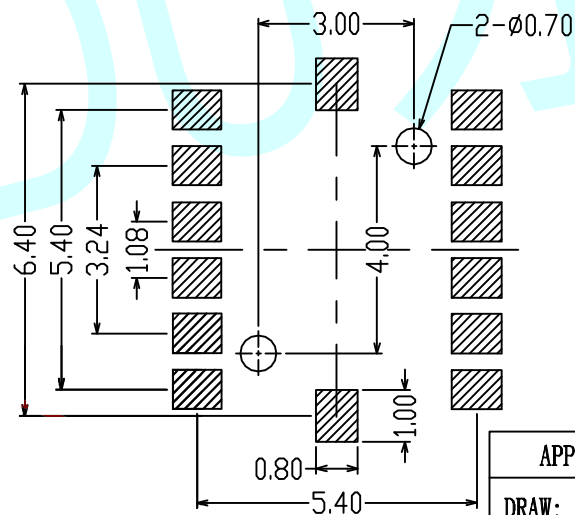
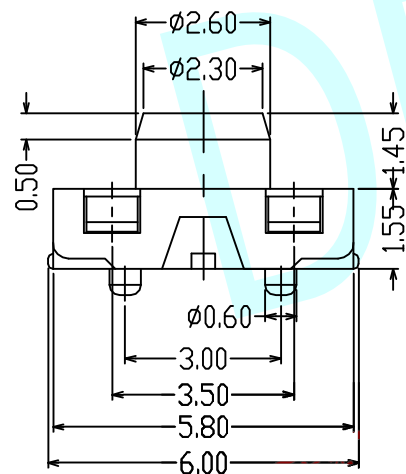
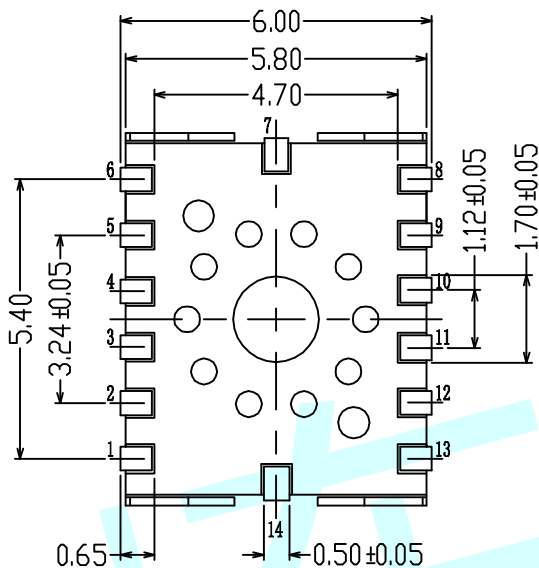


ROHS

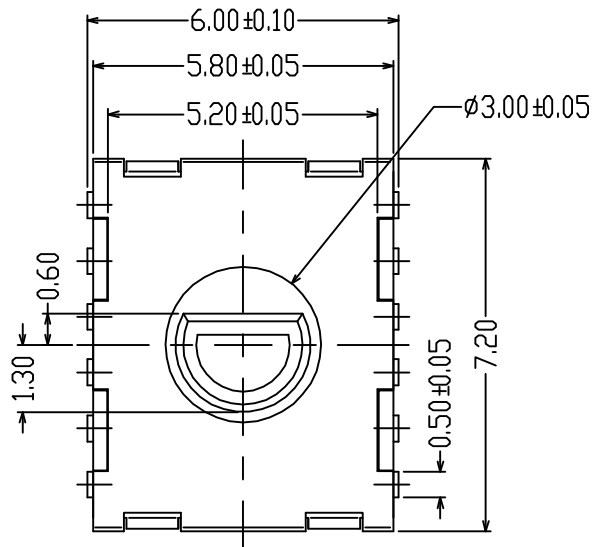

PCB Mounting
Pattern Dimension

NOTES:

1. Rating: DC 30V 10mA
2. Contact resistance: 100mΩ MAX
3. Insulation resistance: 100MΩ MIN
4. Service life: 50,000 cycles
5. Operating temperature: -25 °C ~ +85 °C
6. Using humidity: ≤85% RH
7. Operating power: 180±50gf

Circuit Diagram

	1	2	3	4	5	6	7	8	9	10	11	12	13	14
1	●		●			●	●			●			●	●
2		●	●			●	●			●			●	●
3			●	●		●	●			●			●	●
4			●	●	●	●	●			●			●	●
5			●	●	●	●	●			●			●	●
6			●	●	●	●	●	●		●			●	●
7			●	●	●	●	●		●	●			●	●
8			●	●	●	●	●		●	●	●		●	●
9			●	●	●	●	●		●	●		●	●	●
10			●	●	●	●	●		●	●	●	●	●	●

APPROVALS		DATE	http://www.dongdudz.com		
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:
CHECKED:	***	****	30≥	±0.30	±2°
APPOVALS:	***	****	10~30	±0.20	
			5~10	±0.15	
			≤5	±0.10	
			 ® 东都电子 DONGDU ELECTRONICS		
			MODEL: ROCKER SWITCH PART NO: DDU-1206 UNIT :mm SCALE:1:1  REV: A PAGE:1/1		