

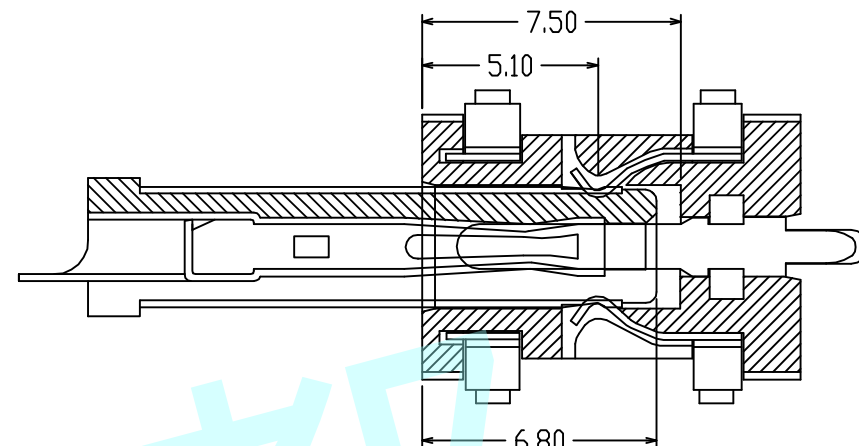
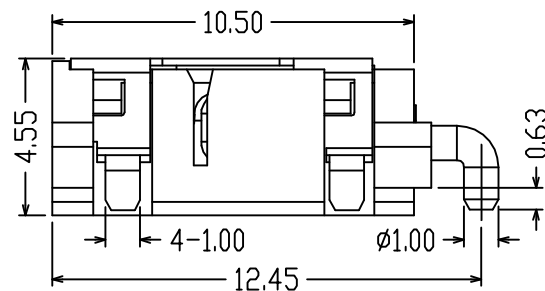
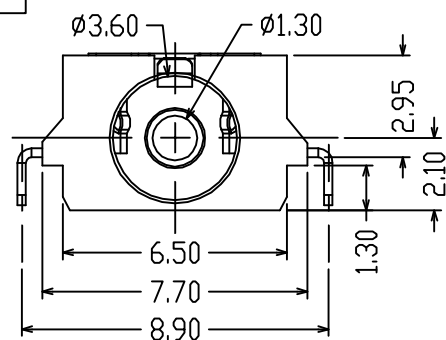



ROHS

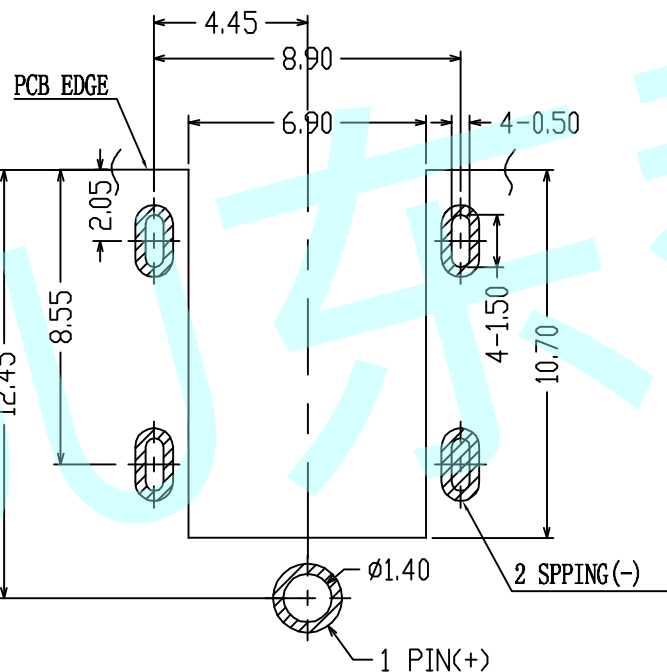


DC JACK INSERT DEPTH

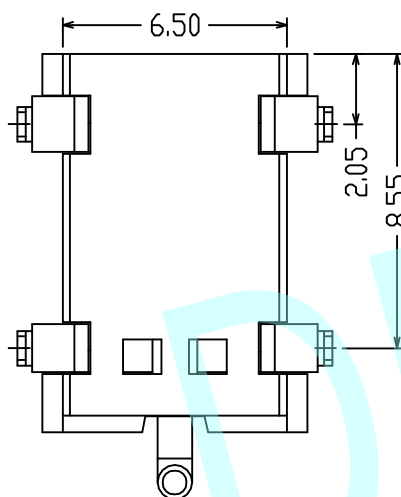

CIRCUIT DIAGRAM

NOTES:

1. Rating: 3A 24V DC
2. Contact Resistance: 30mΩ Max
3. Operating temperature: -20°C~70°C
4. Operating force: 2.94-29.4N
5. Operating Life: 5,000 cycles

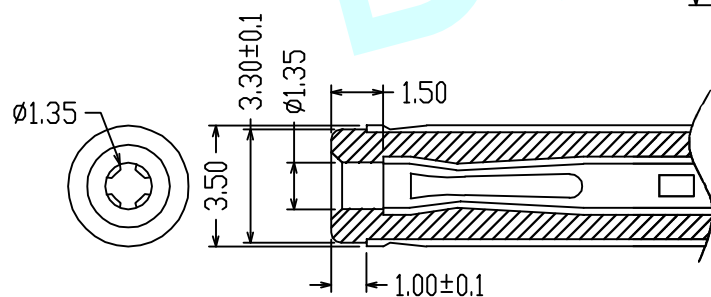

DC MATE PLUG

1 Recommended PCB Layout
- OP View (Tolerance: ±0.05)

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	***	30≥	±0.30
APPOVALS:	***	***	10~30	±0.20
			5~10	±0.15
			≤5	±0.10



MODEL:	DC POWER JACK	
PART NO:	DC-087	
UNIT :mm	SCALE:1:1	✎
REV:	A	PAGE:1/1