
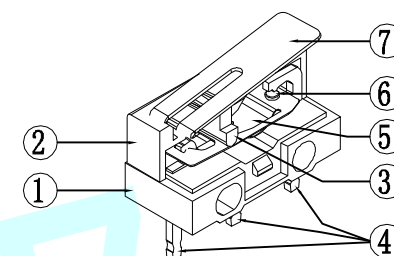

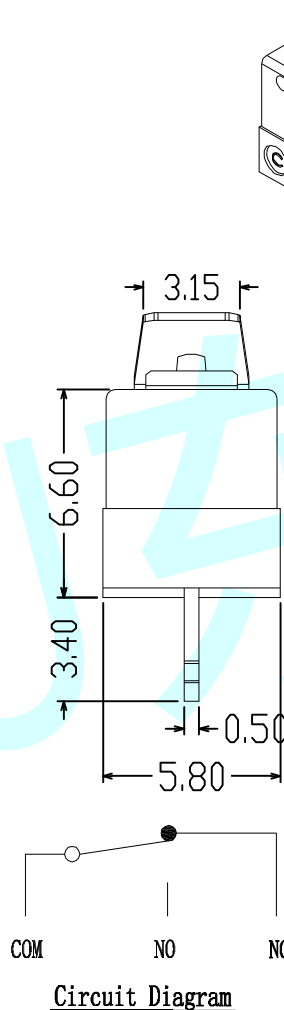


ROHS

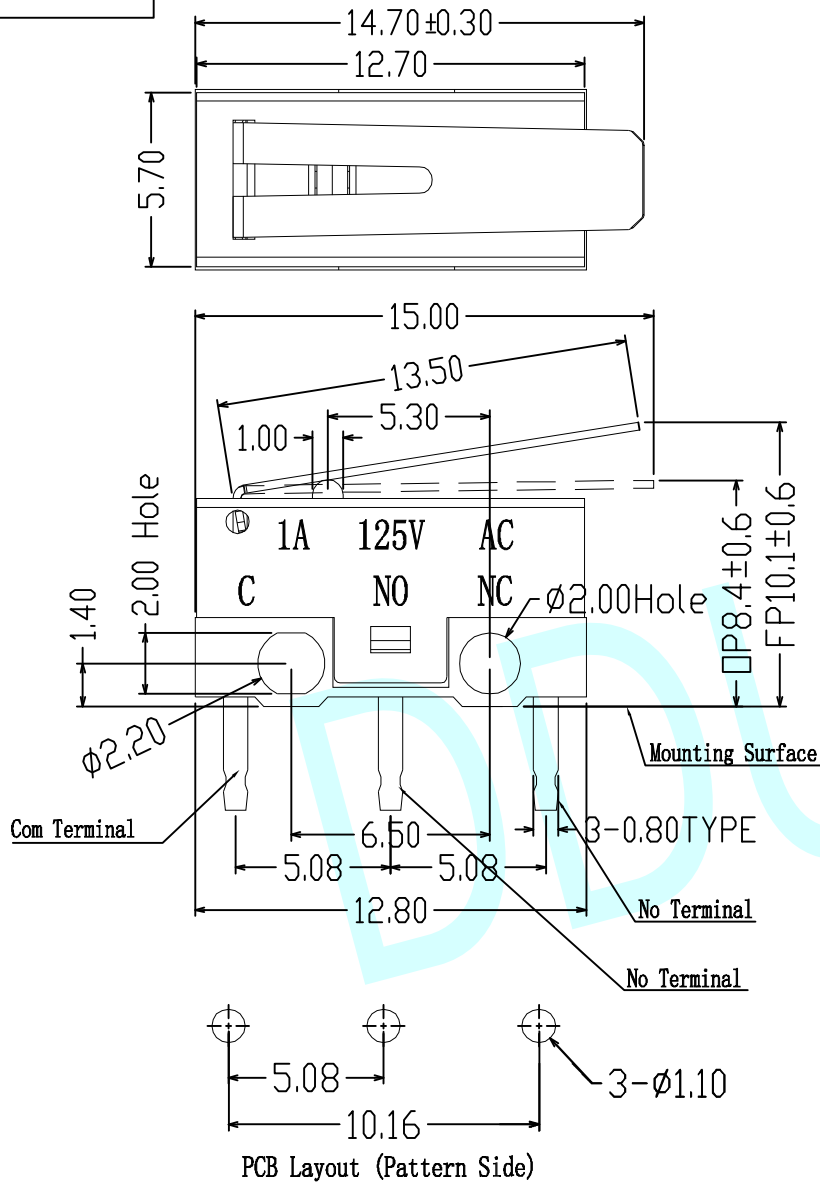

NOTES:

1. Rated value: AC 125 volt 1 A / DC 30 volt 0.1 A
2. Contact impedance: 50 millieuropean max
3. Insulation impedance: 100 mega Min
4. High voltage resistance: AC 500 volts (50~60 Hz) for 1 minute
5. Operating force: 25±15gf
6. Resilience: 10gf (Min)

⑦	pressing handle	1	Stainless steel	material
⑥	contact	1	Silver alloy	material
⑤	Shrapnel	1	Copper alloy	material
④	terminal	3	brass	silvering
③	The guide core	1	POM	green 3.05 High guide core
②	Lid	1	PBT	black
①	base	1	PBT	black
Serial No.	Product model	Q'TY	material	Remarks

APPROVALS		DATE		http://www.dongdudz.com		 东都电子 DONGDU ELECTRONICS			
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:		±2°		
CHECKED:	***	****	30≥	±0.30					
			10~30	±0.20					
			5~10	±0.15					
APPROVALS:	***	****	≤5	±0.10	MODEL: MICRO SWITCHS				
						PART NO: DDU-1701			
						UNIT :mm		SCALE:1:1	
						REV: A		PAGE:1/1	