
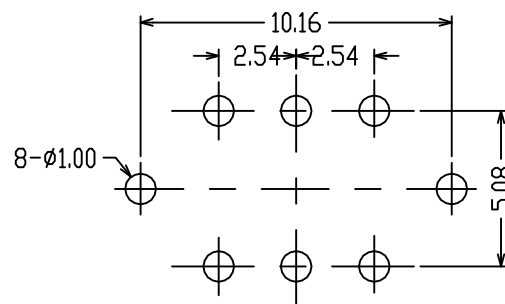
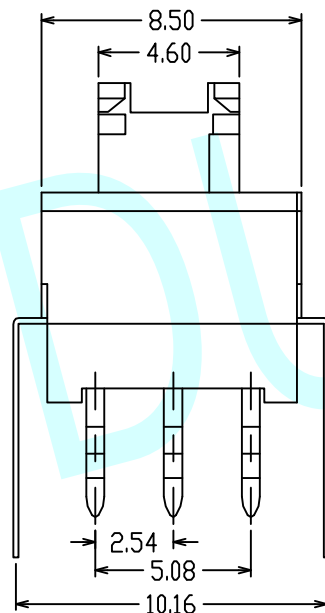
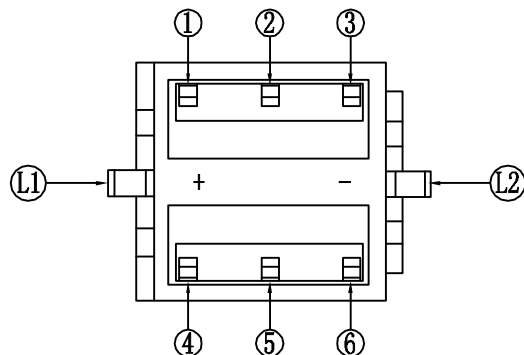
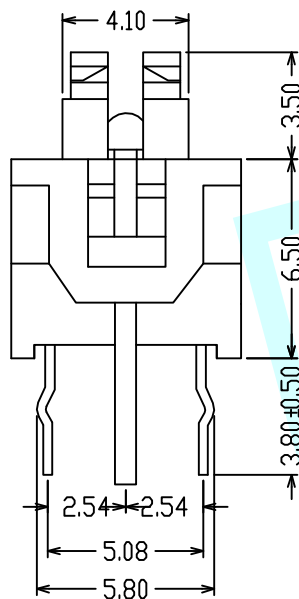


ROHS

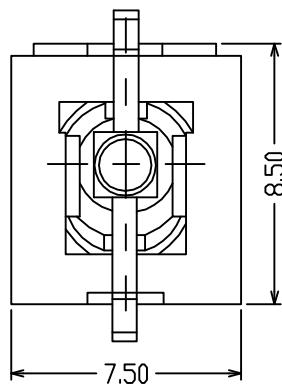

PCB Layout (Pattern Side)

NOTES:

1. Rating: 12V DC 50mA
2. Contact Resistance: 100mΩ Max
3. Insulation resistance: 100MΩ Min
4. Dielectric Strength: 250V AC (50/60HZ) FOR 1Min
5. Life test: 100,000 Cycles
6. Operating temperature range: -20°C ~ +70°C
7. Operation Force: 160±50g / 250±50g
8. Travel: 0.25±0.10mm

Type	Switch Action		Circuit
Lock	Normal ON	Push to lock OFF	
Connectong Terminal	1 - 2 4 - 5	2 - 3 5 - 6	
NO LOCK	Normal ON	Push ON	
Connectong Terminal	1 - 2 4 - 5	2 - 3 5 - 6	
LED Circuit			

Operating Type		Push To Lock(自锁)		Push No Lock(无锁)	
LED Colour(LED颜色)		红黄双色 Red and yellow	红绿双色 Red and Green	黄绿双色 Yellow and Green	
		Whiler(白色)	Full Green(纯绿)	Amber(琥珀色)	
		Red(红色)	Yellow(黄色)	Green(绿色)	Blue(蓝色)
APPROVALS		DATE	http://www.dongdudz.com		
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:
CHECKED:	***	****	30≥	±0.30	±2°
APPOVALS:	***	****	10~30	±0.20	
			5~10	±0.15	
			≤5	±0.10	
			® 东都电子		
			DONGDU ELECTRONICS		
			MODEL: LED Tact Switch		
			PART NO: DDU-1537		
UNIT :mm			SCALE:1:1		
REV:			A		PAGE:1/1