

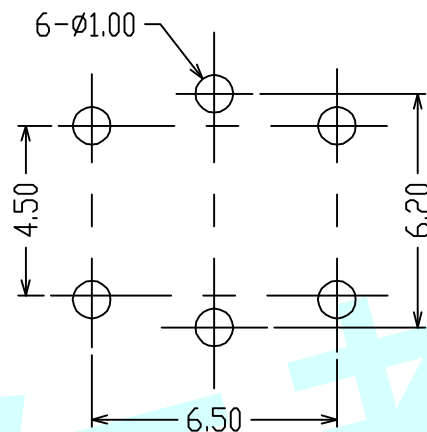


ROHS

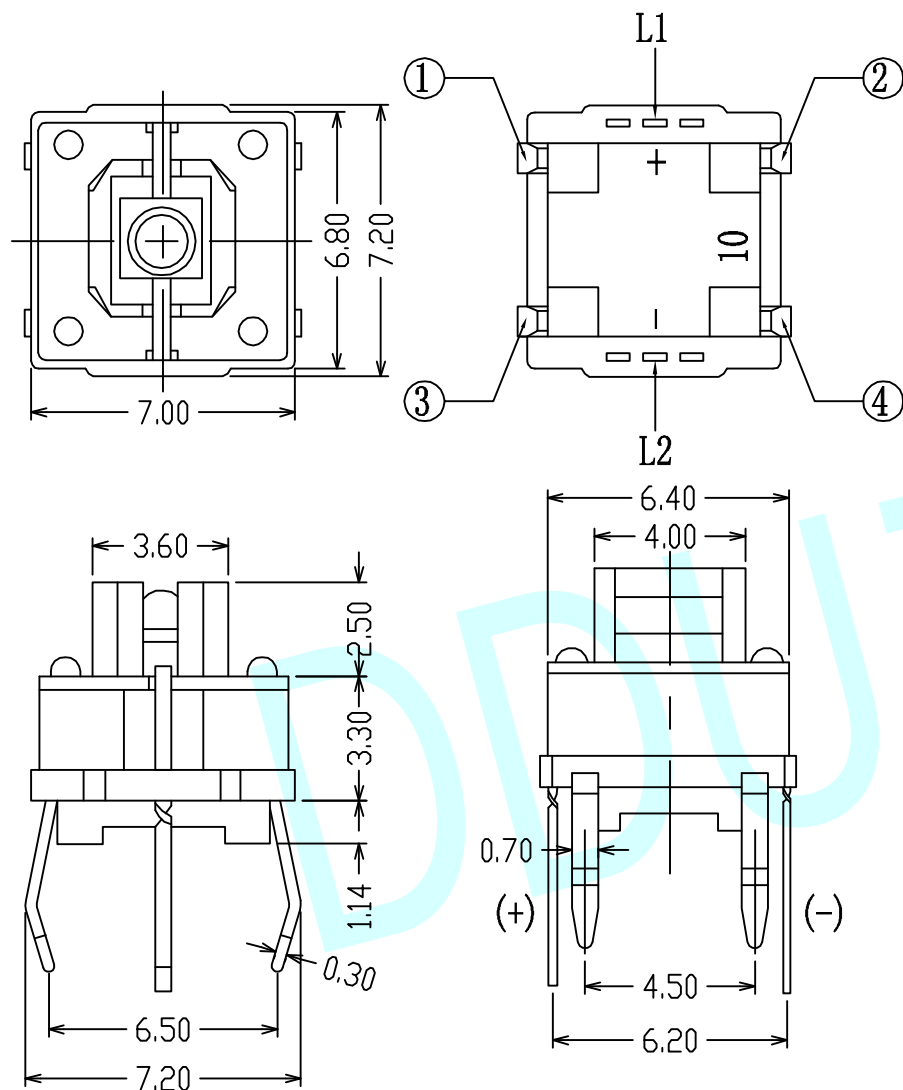

PCB Layout (Pattern Side)



Circuit Diagram

NOTES:

1. Rating: 12V DC 50mA
2. Contact Resistance: 100mΩ Max
3. Insulation Resistance: 250V DC FOR 1MIN
4. Dielectric Strength: 250V AC (50/60HZ) FOR 1MIN
5. Life test: 100,000 CYCLES
6. Operation Force: 160±50g
7. Travel: 0.25±0.1mm

LED Color (LED颜色)

1	2	3	4	5	6	12	13	14	23
Red	Yellow	Green	Blue	White	Pure Green	Red Yellow	Red Green	Red Blue	Yellow Green

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30≥	±0.30
APPOVALS:	***	****	10~30	±0.20
			5~10	±0.15
			≤5	±0.10

 ® 东都电子 DONGDU ELECTRONICS	
MODEL:	LED Tact Switch
PART NO:	DDU-1523
UNIT :mm	SCALE:1:1
REV:	A