

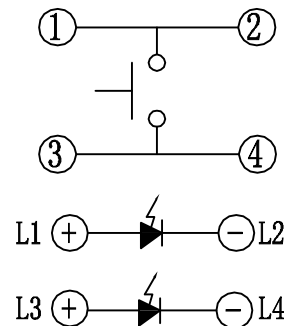
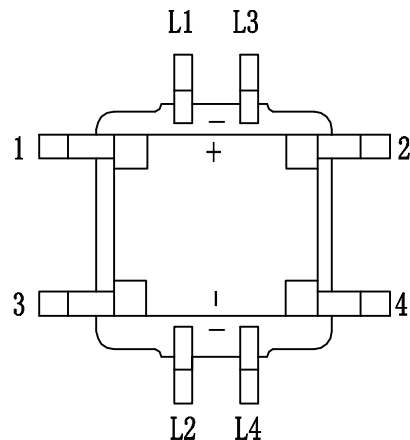
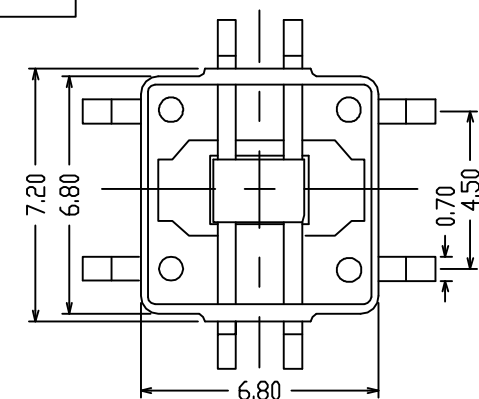
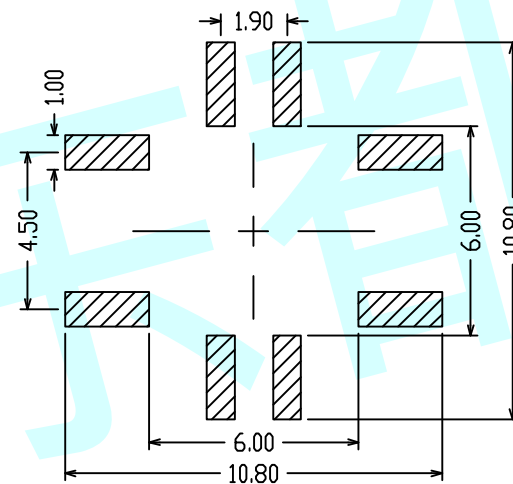


ROHS

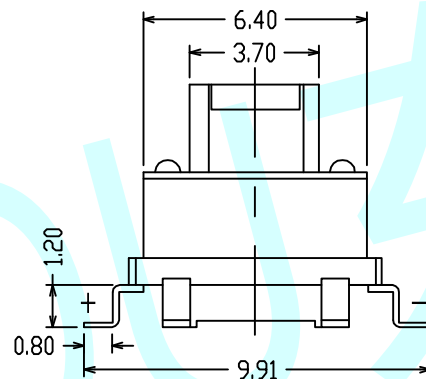

Circuit Diagram

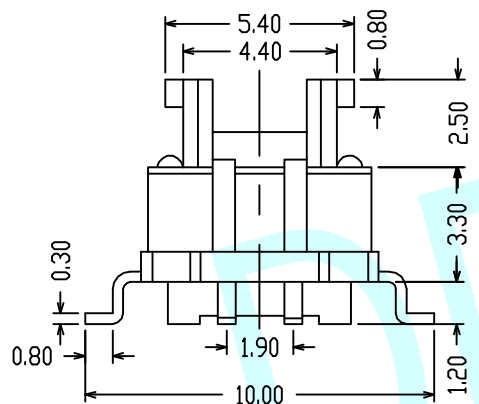

PCB Layout (Pattern Side)

NOTES:

1. Rating: 12V DC 50mA
2. Contact Resistance: 100mΩ Max
3. Insulation Resistance: 100MΩ 250V DC FOR 1MIN
4. Dielectric Strength: 250V AC (50/60Hz) FOR 1MIN
5. Life Test: 100,000 Cycles
6. Operation Force: 160±50gf/250±50gf
7. Travel: 0.25±0.10mm
8. Operating temperature range: -20℃~+70℃

LED Colour(LED颜色)			RGB三色		红蓝		红翠绿		红白双色	
APPROVALS		DATE		http://www.dongdudz.com						
DRAW:	ZRD	2017-12-6		TOLERANCE:		ANGLE:		® 东都电子 DONGDU ELECTRONICS		
CHECKED:	***	****	30≥	±0.30	±2°					
			10~30	±0.20						
			5~10	±0.15						
APPROVALS:	***	****	≤5	±0.10						
MODEL:		LED Tact Switch								
PART NO:		DDU-1519								
UNIT :mm		SCALE:1:1								
REV:		A		PAGE:1/1						