
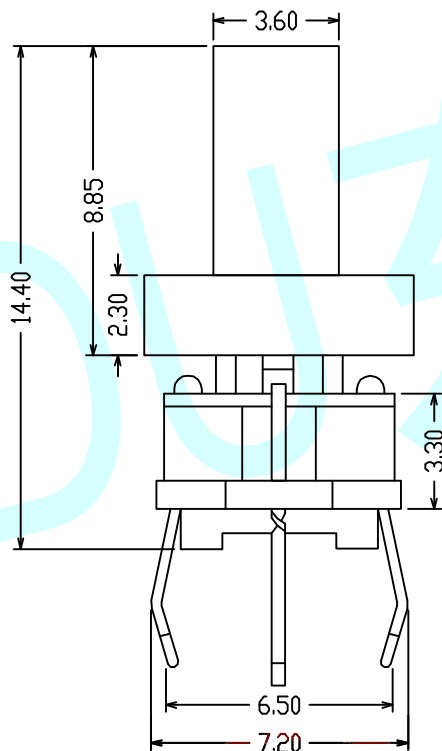
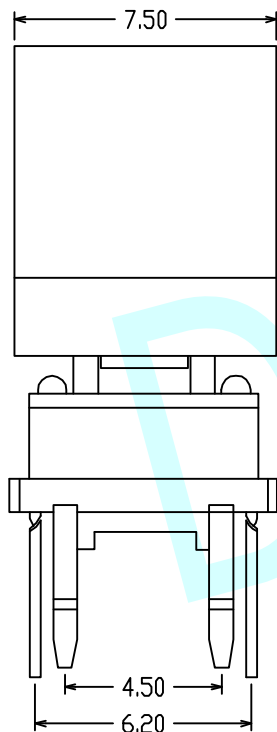
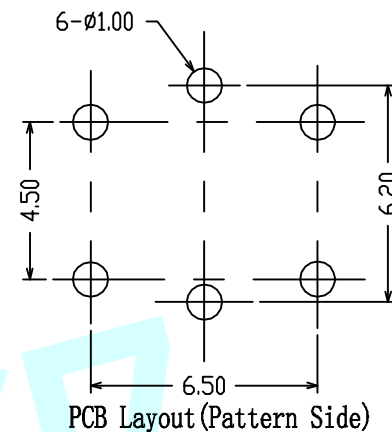

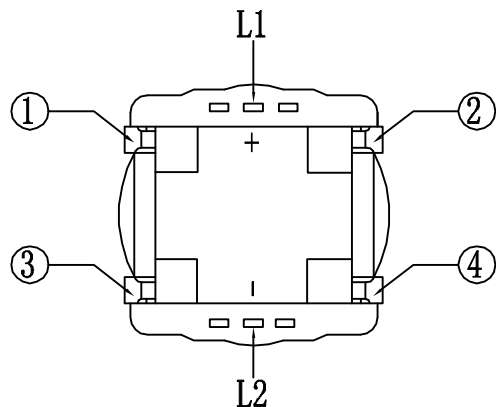


ROHS



NOTES:

1. Rating: 12V DC 50mA
2. Contact Resistance: 100mΩ Max
3. Insulation Resistance: 100MΩ 250V DC FOR 1MIN
4. Dielectric Strength: 250V AC (50/60Hz) FOR 1MIN
5. Life Test: 100,000 Cycles
6. Operation Force: 160±50gf/250±50gf
7. Travel: 0.25±0.10mm
8. Operating temperature range: -20℃~+70℃

LED Colour (LED颜色)			Whiler(白色)		Full Green(翠绿)		Amber(琥珀色)																			
			Red(红色)		Yellow(黄色)		Green(绿色)		Blue(蓝色)																	
APPROVALS			DATE		http://www.dongdudz.com																					
DRAW:		ZRD	2017-12-6		TOLERANCE:		ANGLE:		® 东都电子 DONGDU ELECTRONICS <table><tr><td colspan="2">MODEL:</td><td colspan="2">LED Tact Switch</td></tr><tr><td colspan="2">PART NO:</td><td colspan="2">DDU-1518</td></tr><tr><td colspan="2">UNIT :mm</td><td>SCALE:1:1</td><td></td></tr><tr><td colspan="2">REV:</td><td>A</td><td>PAGE:1/1</td></tr></table>		MODEL:		LED Tact Switch		PART NO:		DDU-1518		UNIT :mm		SCALE:1:1		REV:		A	PAGE:1/1
MODEL:		LED Tact Switch																								
PART NO:		DDU-1518																								
UNIT :mm		SCALE:1:1																								
REV:		A	PAGE:1/1																							
CHECKED:		***	****		30≥		±0.30																			
				10~30		±0.20																				
				5~10		±0.15																				
APPOVALS:		***	****		≤5		±0.10																			