

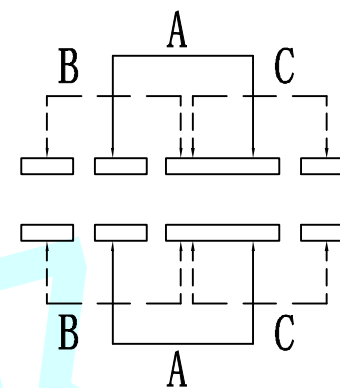
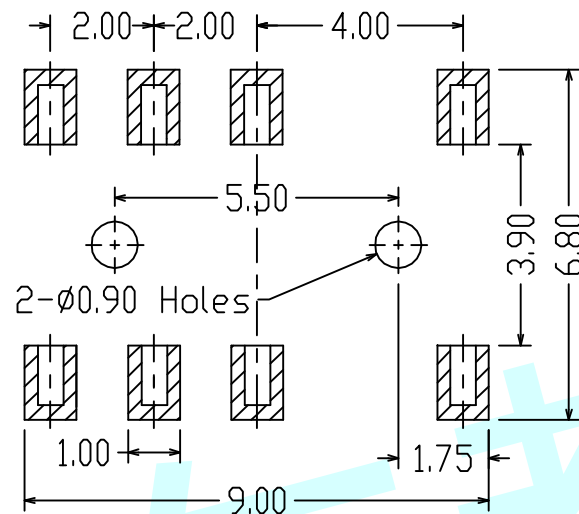
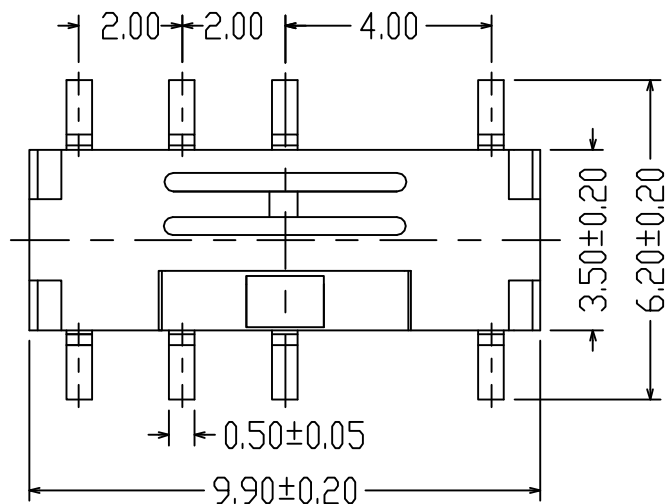


ROHS

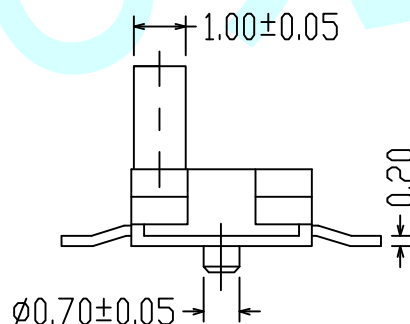

Circuit Diagram

PCB Layout (Pattern Side)

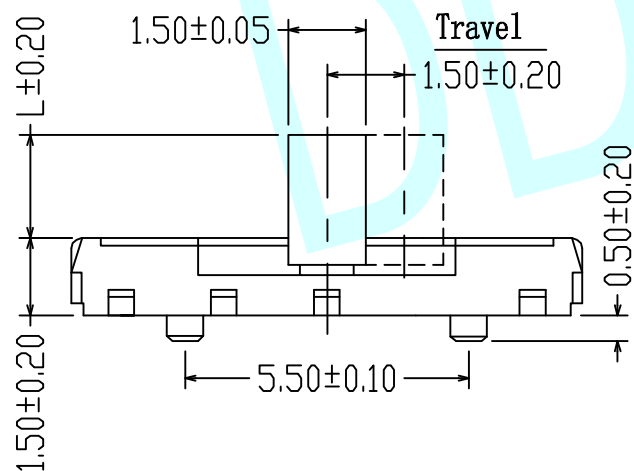

NOTES:

1. Rating: DC 4V 300mA
2. Contact Resistance: $\leq 50m\Omega$
3. Insulation Resistance: $\geq 100M\Omega$
4. Withstand voltage: AC 500V 1 Minute
5. Electrical Life: 10,000 Cycles above (Load)
6. Mechanical Life: 10,000 Cycles (NO Load)
7. Operating force range: 250gf $\pm$ 100gf
8. Operating temperature range: -25°C $\pm$ 80°C
9. Ambient humidity used: $\leq 85\%RH$
10. Solder ability: 245°C $\pm$ 5°C, 3S $\pm$ 0.5S
11. Withstand Soldering temperature: 260°C $\pm$ 5°C, 3S $\pm$ 1S

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	***	30 $\geq$	± 0.30
APPOVALS:	***	***	10 $\sim$ 30	± 0.20
			5 $\sim$ 10	± 0.15
			≤ 5	± 0.10

 ® 东都电子 DONGDU ELECTRONICS	
MODEL:	TOGGLE SWITCHES
PART NO:	DDU-1424S
UNIT :mm	SCALE:1:1
REV:	A

L 1.00 2.00