

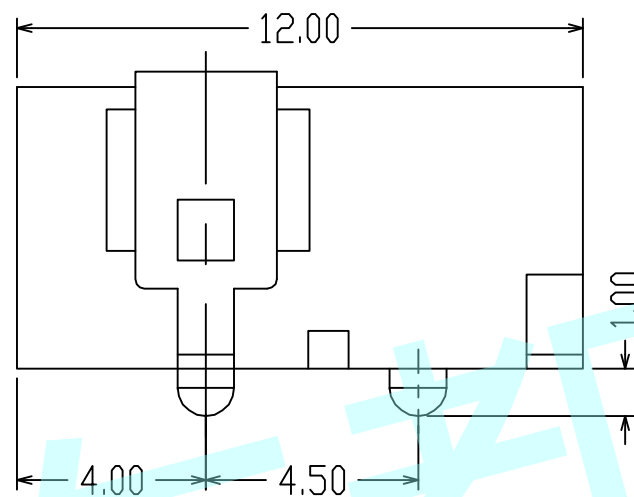


ROHS

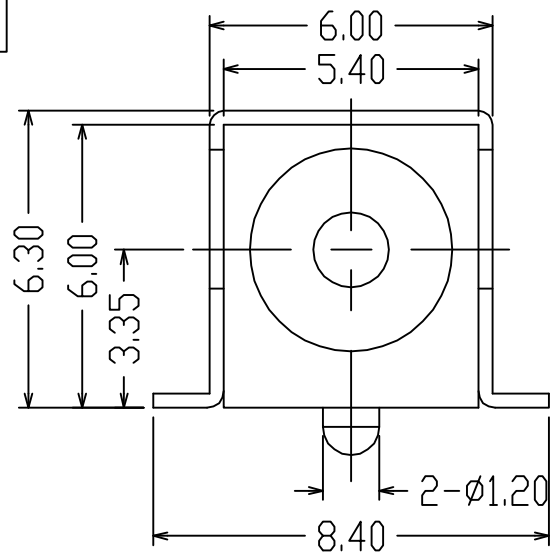


DC098A




CIRCUIT DIAGRAM


DC098B



CIRCUIT DIAGRAM

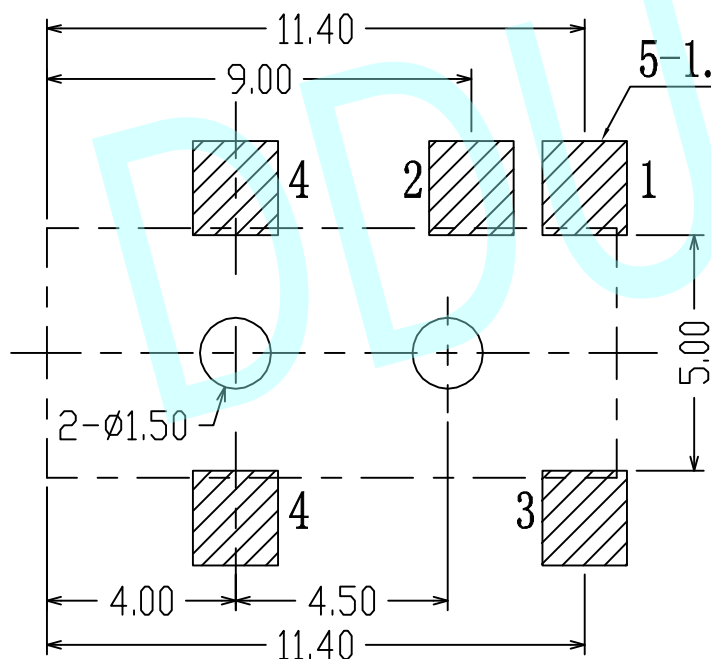

PCB LAYOUT(Copper-side view)

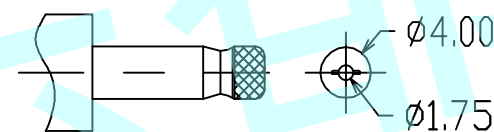

DC MATE PLUG

NOTES:

1. Rating: 0.5A 30V DC
2. Contact resistance: 100mΩ MAX
3. Operating temperature: -20℃~70℃
4. Operating force: 3-20N
5. Operating Life: 5,000 cycles

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS		
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:		
CHECKED:	***	***	30≥	±0.30	±2°	MODEL:	DC POWER JACK
			10~30	±0.20		PART NO:	DC-098
			5~10	±0.15		UNIT :mm	SCALE:1:1
≤5	±0.10	REV:	A	PAGE:1/1			