



ROHS

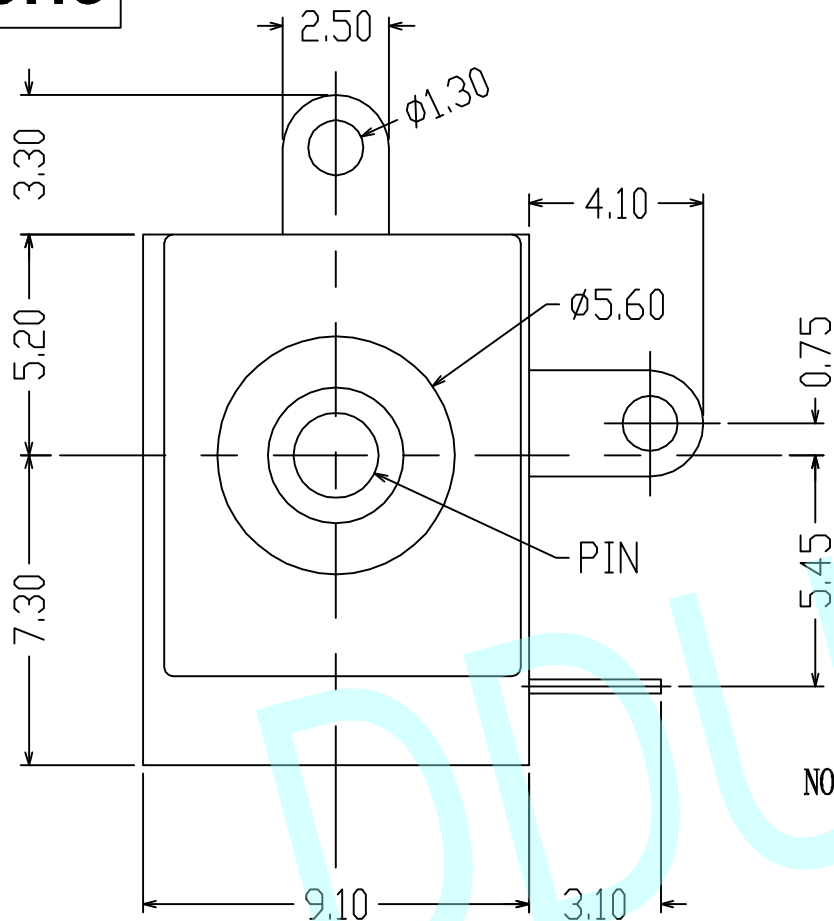


NOTES:

1. Rating:DC 0.5A 30V
2. Contact Resistance:100mΩ Max
3. Operating temperature:-20℃~70℃
4. Operating force:3-20N
5. Operating Life:5,000cycles

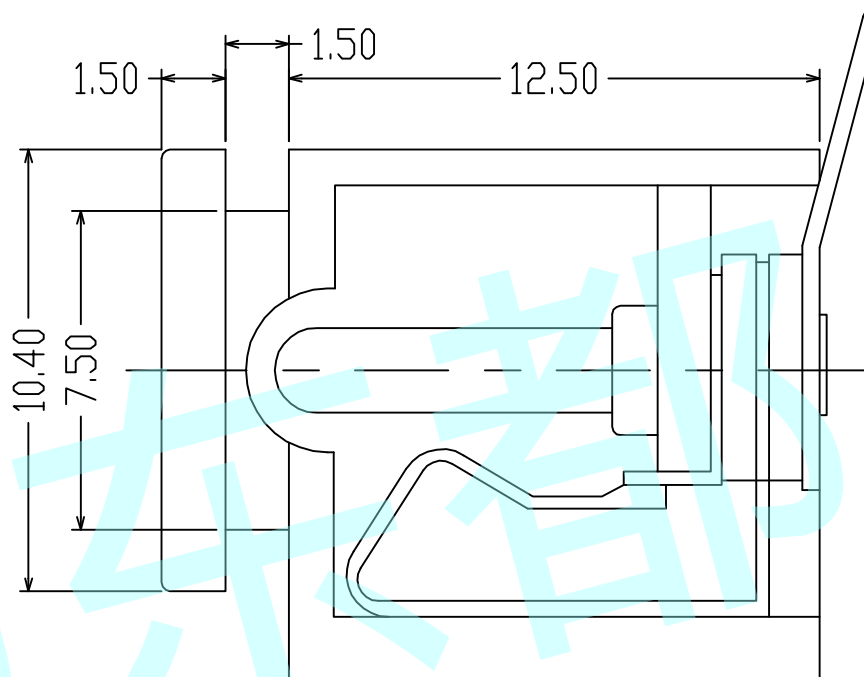


DC-009-A




CIRCUIT DIAGRAM

DC-009-B



CIRCUIT DIAGRAM

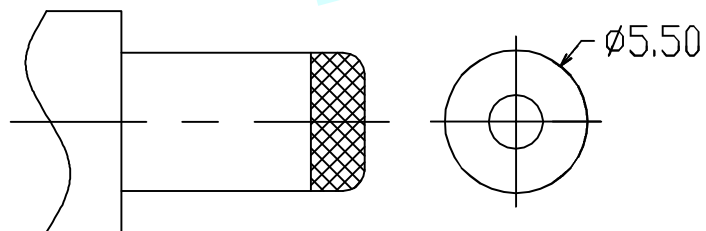

DC MATE PLUG

		PIN		ø2.00		ø2.35		ø2.50													
APPROVALS		DATE		http://www.dongdudz.com		® 东都电子 DONGDU ELECTRONICS <table><tr><td>MODEL:</td><td colspan="2">DC POWER JACK</td></tr><tr><td>PART NO:</td><td colspan="2">DC-009</td></tr><tr><td>UNIT :mm</td><td>SCALE:1:1</td><td></td></tr><tr><td>REV:</td><td>A</td><td>PAGE:1/1</td></tr></table>				MODEL:	DC POWER JACK		PART NO:	DC-009		UNIT :mm	SCALE:1:1		REV:	A	PAGE:1/1
MODEL:	DC POWER JACK																				
PART NO:	DC-009																				
UNIT :mm	SCALE:1:1																				
REV:	A	PAGE:1/1																			
DRAW:	ZRD	2017-12-6		TOLERANCE:		ANGLE:															
CHECKED:	***	***	30≥	±0.30	±2°																
			10~30	±0.20																	
			5~10	±0.15																	
			≤5	±0.10																	



MODEL:	DC POWER JACK	
PART NO:	DC-009	
UNIT :mm	SCALE:1:1	✎
REV:	A	PAGE:1/1