

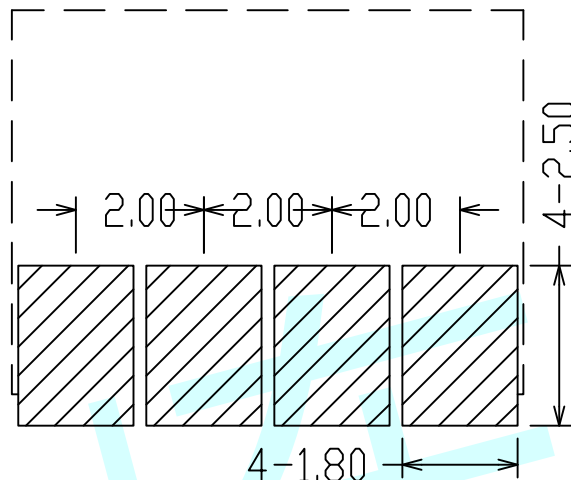
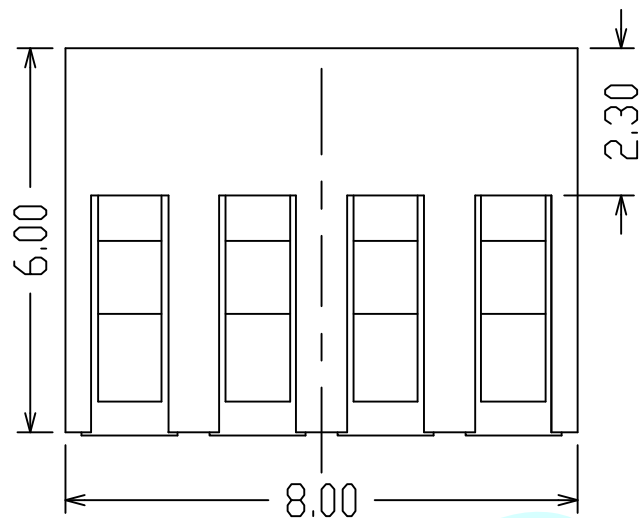


ROHS

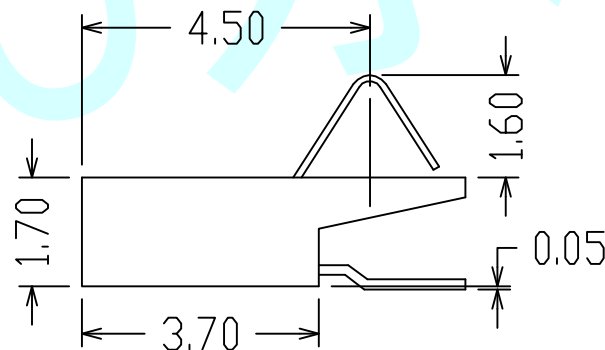

PCB Layout

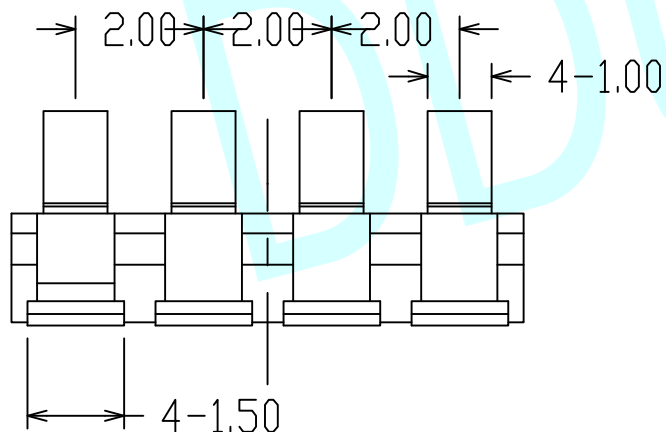

NOTES:

- 1.Voltage Rating :250V AC Min
- 2.Current Rating :2.0A Min
- 3.Dielectric Strength :1000V AC For 1Minute
4. Insulation Resistance :1000M Ω Min
- 5.Contact Resistance :30m Ω Max
6. Operation Temperature : -55℃~+125℃
- 7.Product Withstanding Reflow Soldering :260℃ For 15S
- 8.Durability :5000 Cycles
- 9.Normal Force AtWorking Position :80g Min
10. Insertion Force :>3N
- 11.Insertion :High Temperature Thermoplastic
UL 94V -0 Black(LCP Black)
12. Contact :Beryllium Copper, Gold Flash Over Nickel

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30 $\geq$	± 0.30
APPOVALS:	***	****	10 $\sim$ 30	± 0.20
			5 $\sim$ 10	± 0.15
			≤ 5	± 0.10

MODEL:	BATTERY	
PART NO:	BH-07-4P	
UNIT :mm	SCALE:1:1	
REV:	A	PAGE:1/1

