
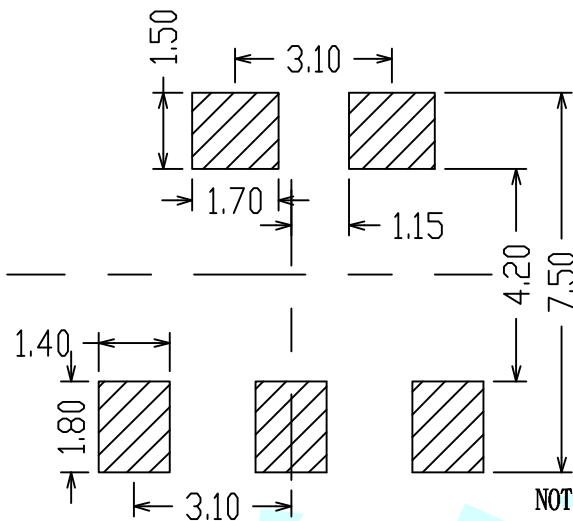
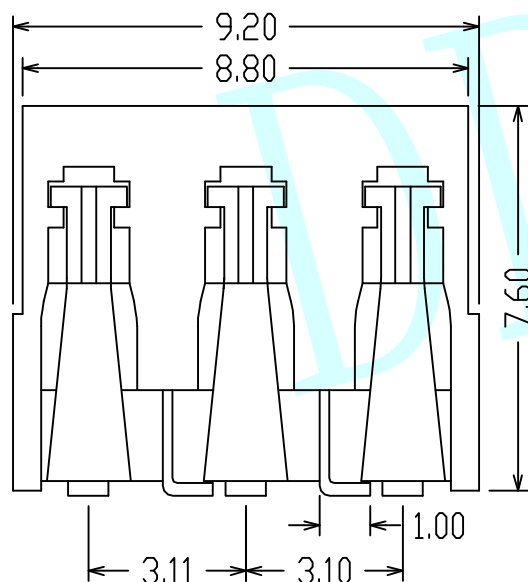


ROHS

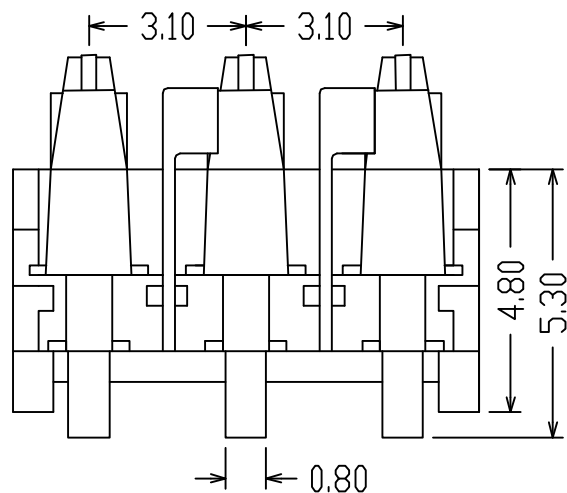

PCB Layout

NOTES:

1. Voltage Rating :250V AC Min
2. Current Rating :2.0A Min
3. Dielectric Strength :1000V AC For 1Minute
4. Insulation Resistance :1000MΩ Min
5. Contact Resistance :30mΩ Max
6. Operation Temperature : -55℃~+125℃
7. Product Withstanding Reflow Soldering :260℃ For 15S
8. Durability :5000 Cycles
9. Normal Force At Working Position :80g Min
10. Insertion Force :>3N
11. Insertion :High Temperature Thermoplastic
UL 94V -0 Black (LCP Black)
12. Contact :Beryllium Copper, Gold Flash Over Nickel

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:	
CHECKED:	***	****	30≥	±0.30	
			10~30	±0.20	
APPOVALS:	***	****	5~10	±0.15	
			≤5	±0.10	±2°
MODEL:		BATTERY			
PART NO:		BH-04-3P			
UNIT :mm		SCALE:1:1			
REV:		A		PAGE:1/1	