

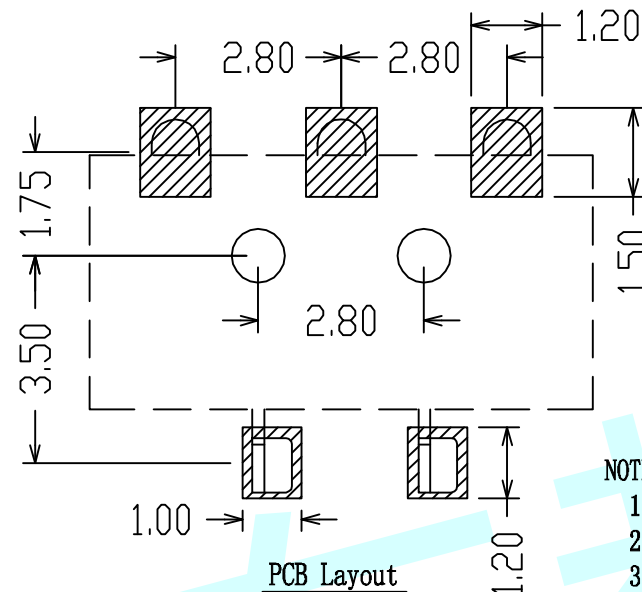
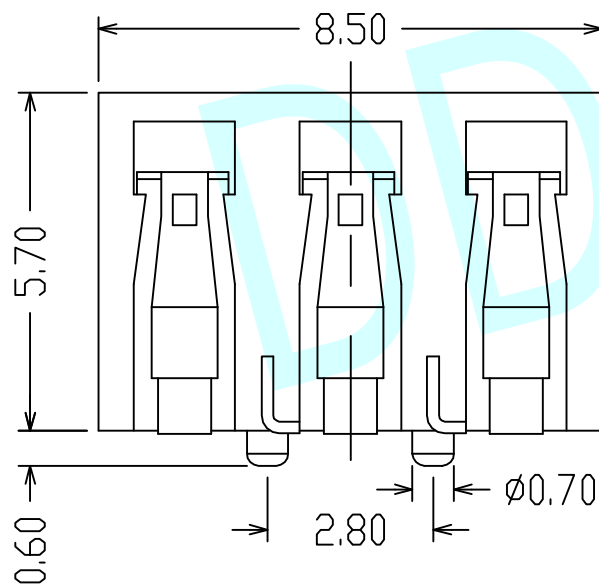


ROHS

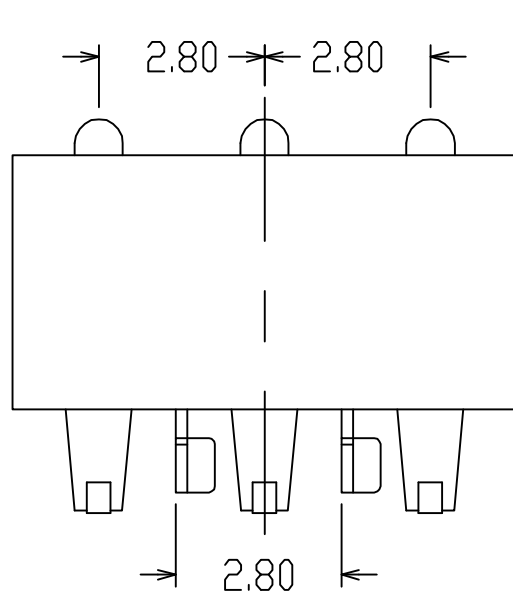

PCB Layout

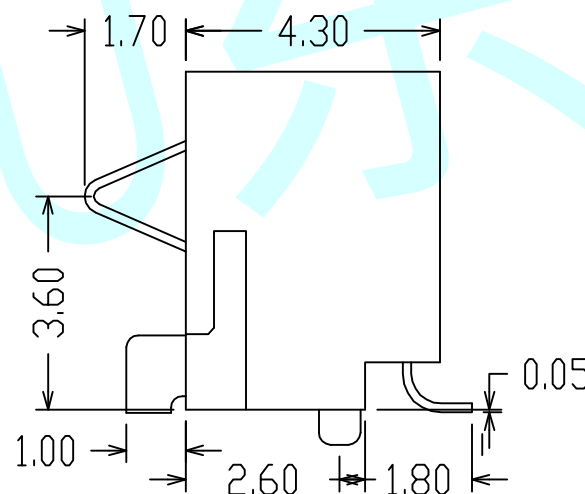

NOTES:

1. Voltage Rating :250V AC Min
2. Current Rating :2.0A Min
3. Dielectric Strength :1000V AC For 1Minute
4. Insulation Resistance :1000M Ω Min
5. Contact Resistance :30m Ω Max
6. Operation Temperature : -55°C~+125°C
7. Product Withstanding Reflow Soldering :260°C For 15S
8. Durability :5000 Cycles
9. Normal Force At Working Position :80g Min
10. Insertion Force :>3N
11. Insertion :High Temperature Thermoplastic
UL 94V -0 Black(LCP Black)
12. Contact :Beryllium Copper, Gold Flash Over Nickel

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS	
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:	±2°
CHECKED:	***	****	30≥	±0.30		
			10~30	±0.20		
APPROVALS:	***	****	5~10	±0.15		
			≤5	±0.10		
					MODEL:	BATTERY
					PART NO:	BH-05-3P
					UNIT :mm	SCALE:1:1
					REV:	A
					PAGE:1/1	