


ROHS

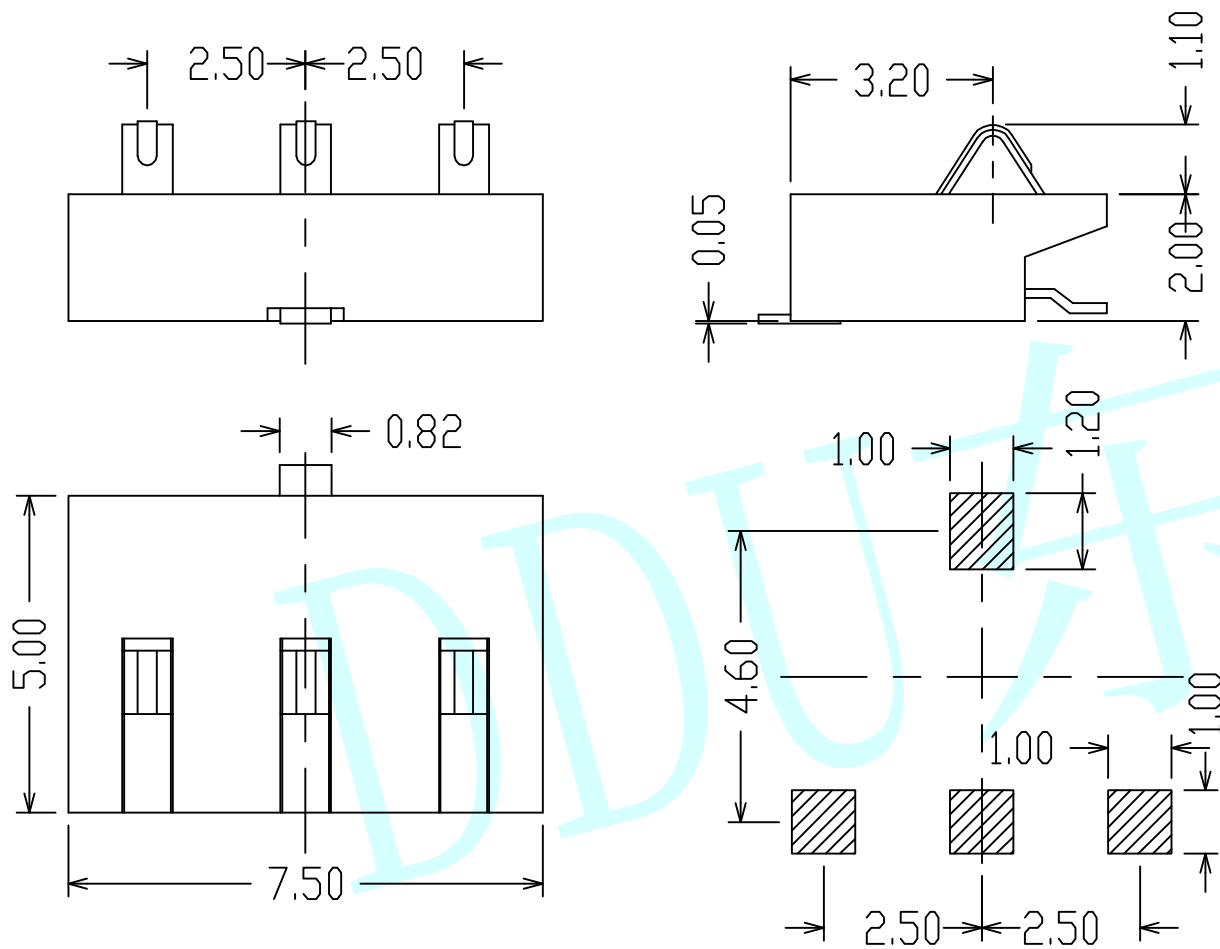

PCB Layout

NOTES:

1. Voltage Rating :250V AC Min
2. Current Rating :2.0A Min
3. Dielectric Strength :1000V AC For 1Minute
4. Insulation Resistance :1000M Ω Min
5. Contact Resistance :30m Ω Max
6. Operation Temperature : -55 $^{\circ}$ C ~ +125 $^{\circ}$ C
7. Product Withstanding Reflow Soldering :260 $^{\circ}$ C For 15S
8. Durability :5000 Cycles
9. Normal Force At Working Position :80g Min
10. Insertion Force :>3N
11. Insertion :High Temperature Thermoplastic
UL 94V -0 Black (LCP Black)
12. Contact :Beryllium Copper, Gold Flash Over Nickel

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS		
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:		
CHECKED:	***	****	30≥	±0.30	±2°	MODEL:	BATTERY
			10~30	±0.20		PART NO:	BH-03-3P
			5~10	±0.15		UNIT :mm	SCALE:1:1
≤5	±0.10	REV:	A	PAGE:1/1			