



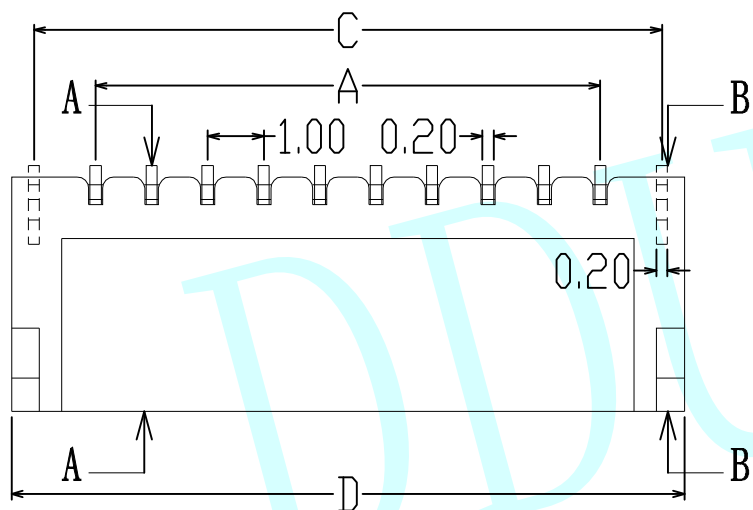
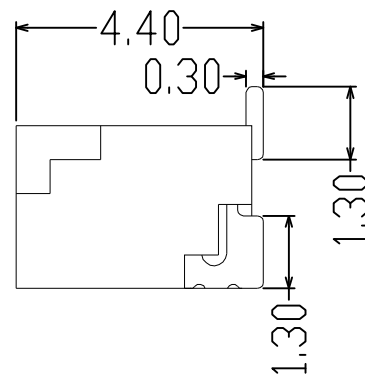


ROHS

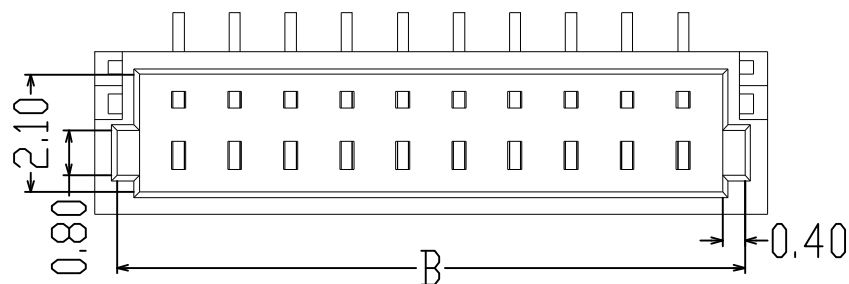

A-A

B-B

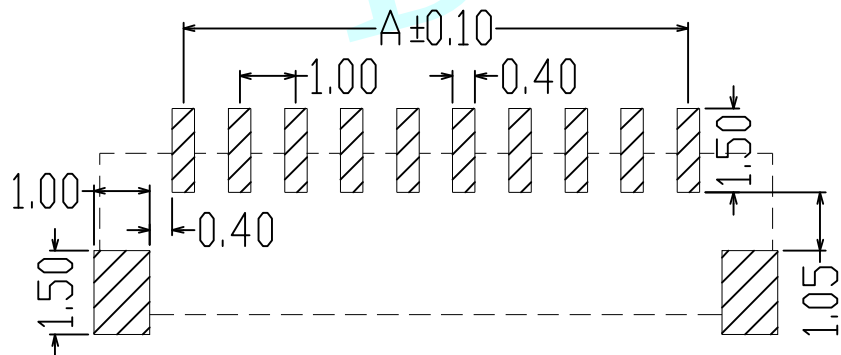

PCB LAYOUT

NOTE:

A. Performance:

1. Rated current: 0.5A
2. Rated voltage: 50V
3. Withstand voltage: 500V
4. Contact resistance: $\leq 20m\Omega$
5. Insulation resistance: 800M Ω
6. Working temperature: -20°C~+85°C

B. Material:

1. Plastic parts: LCP, UL94V-0
2. Insert shrapnel: Phosphor bronze, tinned
3. Welding piece: Phosphor bronze, tinned

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS		
DRAW:	ZRD	2017-12-6	TOLERANCE:			ANGLE:	
CHECKED:	***	***	30≥	±0.30		±2°	
			10~30	±0.20			
			5~10	±0.15			
APPROVALS:	***	***	≤5	±0.10			
					MODEL:	Connector	
					PART NO:	1.0立贴	
					UNIT :mm	SCALE:1:1	
					REV:	A	PAGE:1/1