

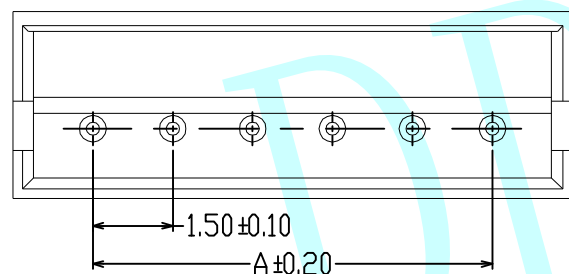
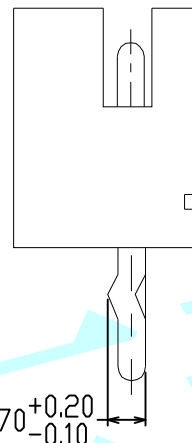
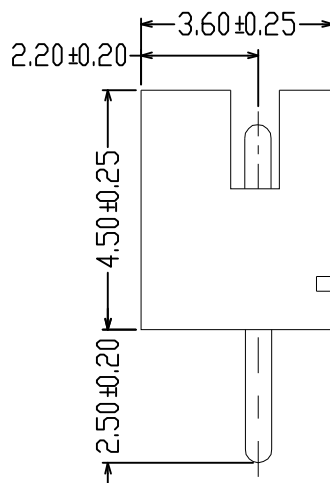


ROHS

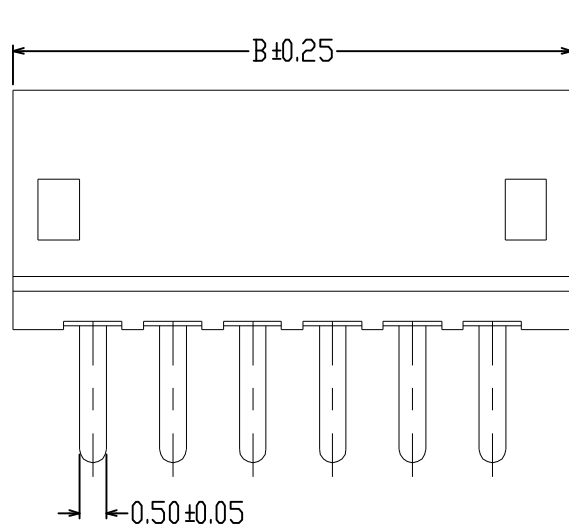

TYPE 1

TYPE 2



PCB LAYOUT

NOTES:

1. Current rating:AC, DC 1A
2. Voltage rating:AC, DC 100V
3. Contact resistance:20mΩ max
4. Insulation resistance:500MΩ min
5. Withstanding voltage:AC 500V 1minute
6. Temperature range:-25℃~+85℃
7. Material:Wafer PBT, UL94V-0
Wafer Nylon66, UL94V-0
Pin Brass tin-plated

15P	21.00	24.00
12P	16.50	19.50
11P	15.00	18.00
10P	13.50	16.50
9P	12.00	15.00
8P	10.50	13.50
7P	9.00	12.00
6P	7.50	10.50
5P	6.00	9.00
4P	4.50	7.50
3P	3.00	6.00
2P	1.50	4.50
Pin No.	Size (mm)	
	A	B

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS		
DRAW:	ZRD	2017-12-6	TOLERANCE:			ANGLE:	
CHECKED:	***	****	30≥	±0.30		±2°	
			10~30	±0.20			
APPROVALS:	***	****	5~10	±0.15			
			≤5	±0.10			
					MODEL:	Connector	
					PART NO:	1.5T-nP-Z	
					UNIT :mm	SCALE:1:1	
					REV:	A	PAGE:1/1