


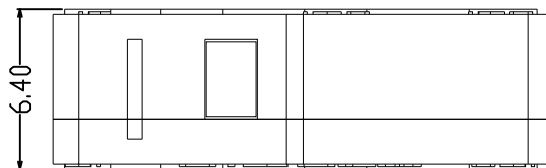
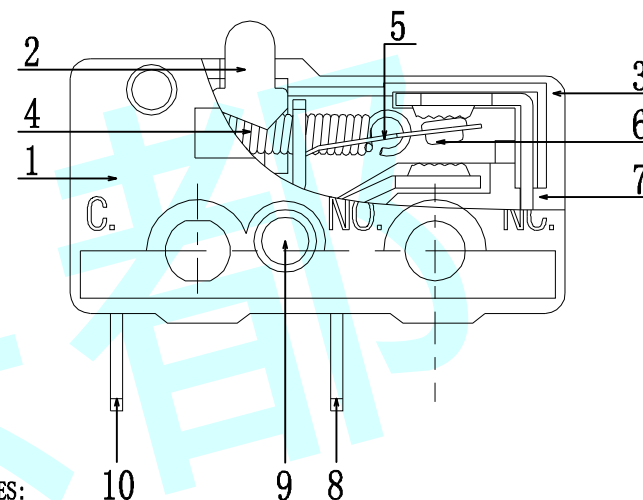


ROHS

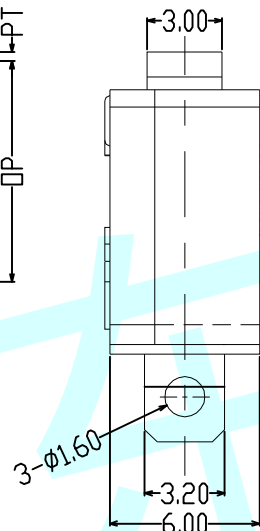

Mounting hole size

REFERENCE
LINE

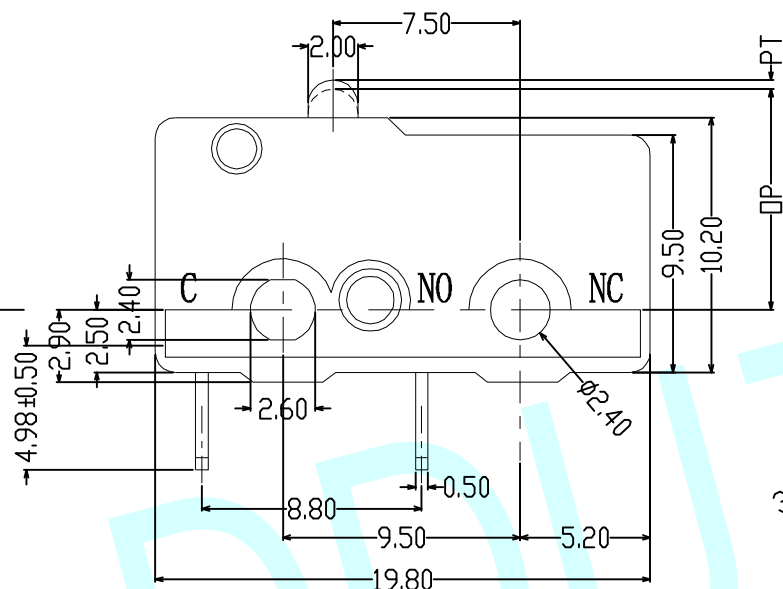


NOTES:

A. Electrical characteristics:

1. Rating: 3A 250V AC, 5A 125V AC
2. Contact resistance: $50\text{m}\Omega$ max (Initial)
3. Insulation resistance: $100\text{M}\Omega$ min (at 500V DC)
4. Dielectric strength: AC 1500V (50/60Hz for 1 minute)
5. Electrically life: 100,000 cycles min
6. Mechanically life: 200,000 cycles min

B. Mechanical characteristics:

1. Operating force (OF): $250\pm 100\text{g}$
2. Pre-travel (PT): 0.9mm max
3. Operating position (OP): $8.4\pm 0.5\text{mm}$
4. Operating temperature: $-25^{\circ}\text{C}\sim +85^{\circ}\text{C}$



CIRCUIT

10	COM TERMINAL	H65 (C2680)	1	Ag PLATED
9	RIVET	AL	1	
8	NO CONTACT	C1100	1	Ag PLATED
7	NC CONTACT	H65 (C2680)	1	
6	CONTACT	SILVER ALLOY	1	
5	CONTACT PLATE	C5210	1	Ag PLATED
4	SPRING	SUS304	1	
3	HOUSING	PA66	1	BLACK
2	NOB	POM	1	BLACK
1	COVER	PA66	1	BLACK
ITEM	PART NAME	MATERIAL	Q' TY	FINISHING

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30≥	±0.30
APPOVALS:	***	****	10~30	±0.20
			5~10	±0.15
			≤5	±0.10
			±2°	
			MODEL: MICRO SWITCHS	
			PART NO: DDU-1708-02	
			UNIT :mm	SCALE: 1:1
			REV: A	PAGE: 1/1

