

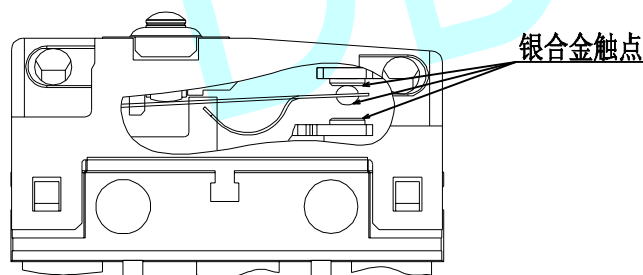
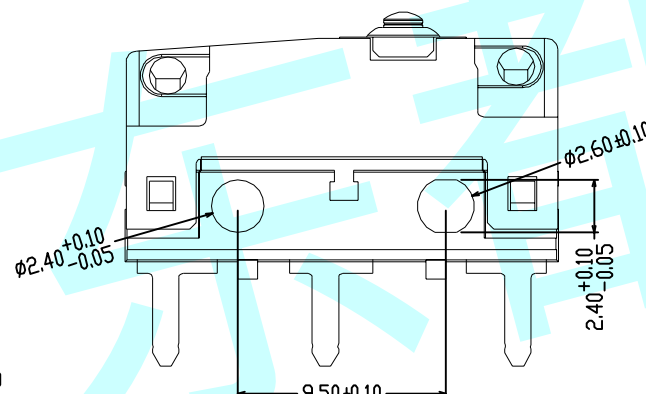
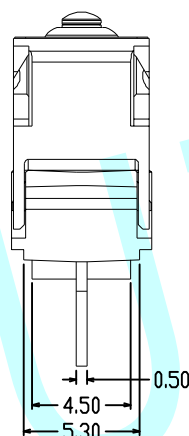
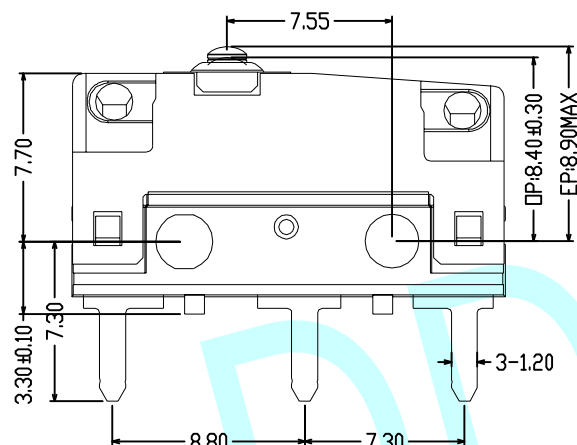


ROHS

NOTES:

1. Rating: AC 125V 5A
2. Contact resistance: $100\text{m}\Omega$ max
3. Insulation resistance: DC 500V $1000\text{M}\Omega$ min
4. Withstand voltage: AC 500V 1min
5. Soldering temper: $235\pm 5^\circ\text{C}$ 5S
6. Electrical life: 10,000 cycles
7. Mechanical life: 300,000 cycles
8. Ambient temper used: $-25^\circ\text{C}\sim +85^\circ\text{C}$
9. Ambient humidity used: $\leq 85\%$ at $+40^\circ\text{C}$
10. Operating force: 200gf max

说明: 利用橡胶封装的密封结构实现防尘防水 (IEC IP67) 端子部分除外

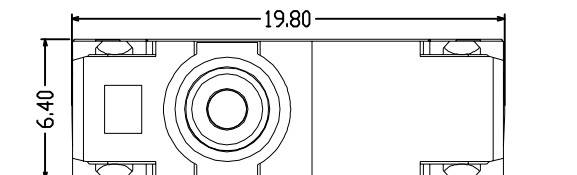

6	端 子	3	C2680	镀 银
5	触 点	3	银合金	
4	按 钮	1	PBT UL94V-0	
3	弹 片	1	C17200	进 口
2	盖 片	1	尼 龙	镀 铜
1	底 座	1	PBT UL94V-0	
序号	名 称	数 量	材 质	备 注

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS	
DRAW:	ZRD	2017-12-6	TOLERANCE:			ANGLE:
CHECKED:	***	****	30≥	±0.30		±2°
			10~30	±0.20		
			5~10	±0.15		
APPROVALS:	***	****	≤5	±0.10		
MODEL:		MICRO SWITCHS				
PART NO:		DDU-1762-IP67				
UNIT :mm		SCALE: 1:1				
REV:		A		PAGE: 1/1		