


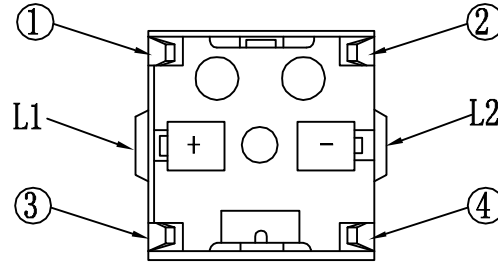


ROHS

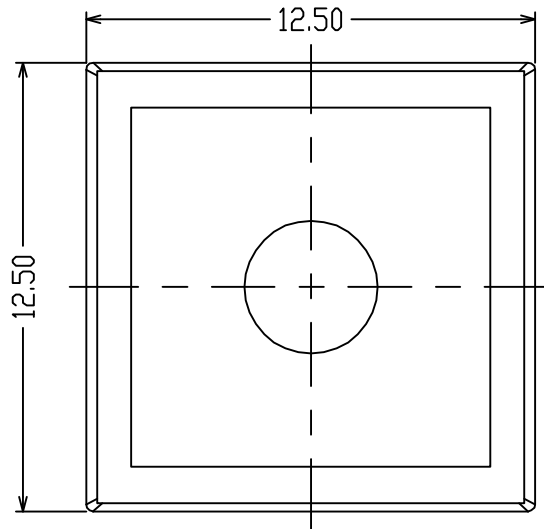



Circuit Diagram

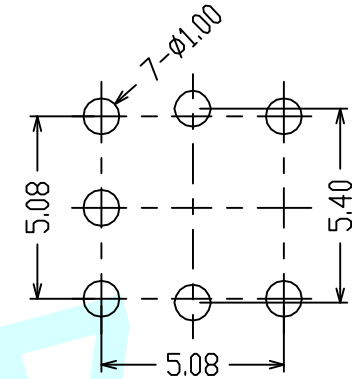

PCB Layout (Pattern Side)

NOTES:

1. Rating: 12V DC 50mA
2. Contact Resistance: 100mΩ Max
3. Insulation Resistance: 100MΩ 250V DC FOR 1MIN
4. Dielectric Strength: 250V AC (50/60Hz) FOR 1MIN
5. Life Test: 100,000 Cycles
6. Operation Force: 160±50gf/250±50gf
7. Travel: 0.25±0.10mm
8. Operating temperature range: -20℃~+70℃

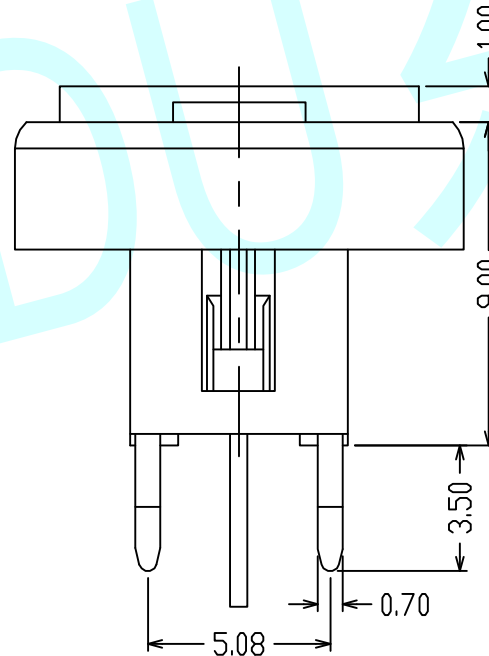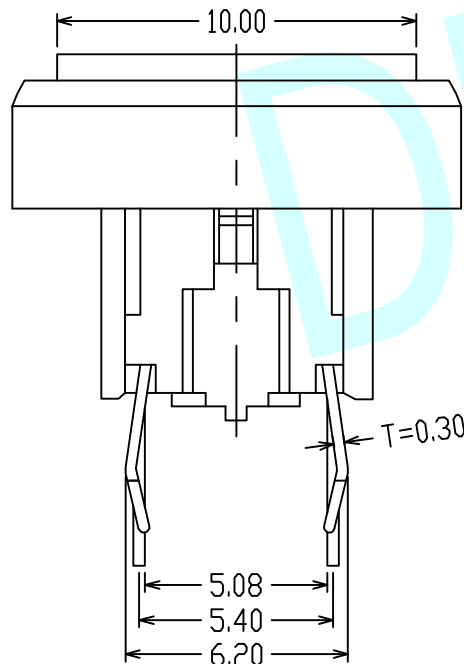

		LED Colour(LED颜色)		Whiler(白色)		Red(红色)		Blue(蓝色)		Green(绿色)		
APPROVALS			DATE		http://www.dongdudz.com			® 东都电子 DONGDU ELECTRONICS				
DRAW:		ZRD	2017-12-6		TOLERANCE:		ANGLE:					
CHECKED:		***	****		30≥	±0.30	±2°		MODEL:		LED Tact Switch	
					10~30	±0.20			PART NO:		DDU-1528	
					5~10	±0.15			UNIT :mm		SCALE:1:1	
APPOVALS:		***	****		≤5	±0.10			REV:		A	PAGE:1/1



MODBL:	LED Tact Switch	
PART NO:	DDU-1528	
UNIT :mm	SCALE: 1:1	
REV:	A	PAGE: 1/1