

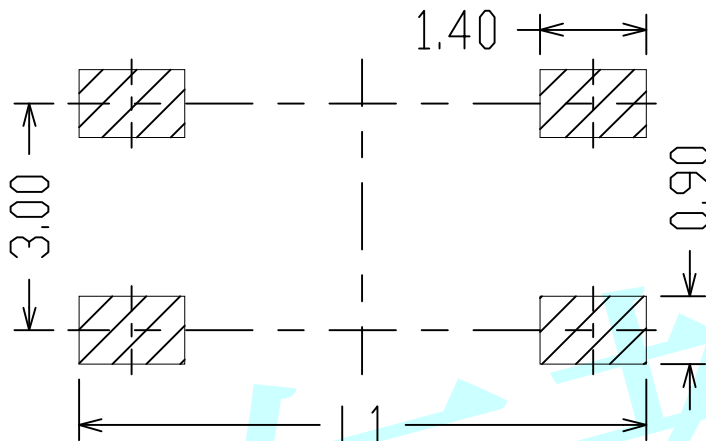


ROHS


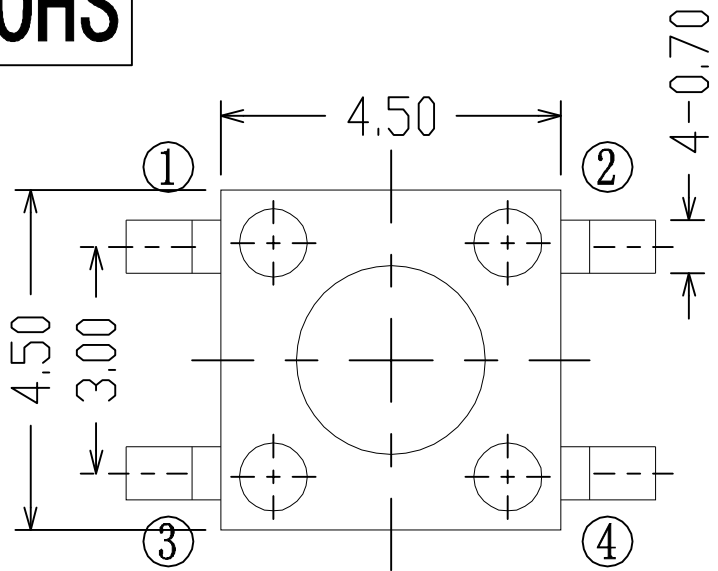


Circuit Diagram

NOTES :

1. Rating :DC 12V 50mA.
2. Contact resistance: $\leq 100\text{m}\Omega$
3. Insulation resistance: $\geq 100\text{M}\Omega$
4. Travel: $0.20 \pm 0.10\text{mm}$
5. Life :100,000 Cycles

PCB Layout (Pattern Side)

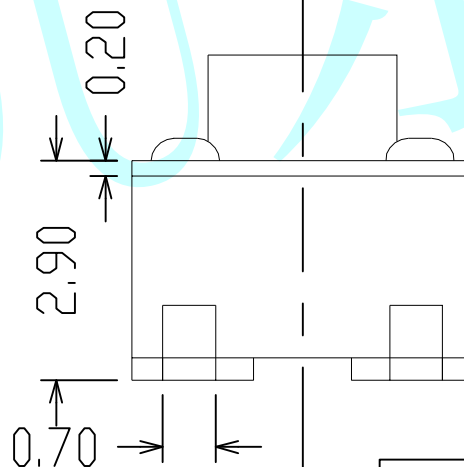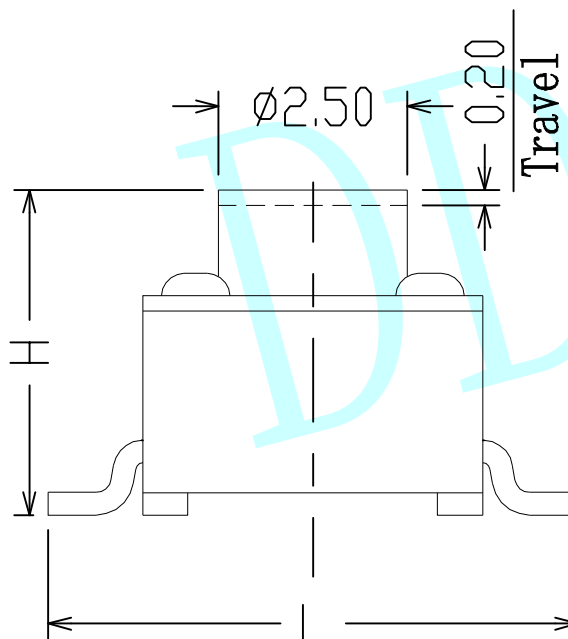

										L1	7.5	8.0		
										L	6.50	6.80 (常规)	7.00	7.50
H	9.00	9.50	10.50	11.00	11.50	12.00	12.50	13.00						
	3.80	4.30	4.50	4.80	5.00	5.50	6.00	6.50	7.00	7.50	8.00	8.50		
Stergth	90±30		130±30				180±30		250±30		350±50			

APPROVALS		DATE	http://www.dongdudz.com		
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:
CHECKED:	***	****	30≥	±0.30	±2°
			10~30	±0.20	
			5~10	±0.15	
			≤5	±0.10	
APPROVALS:		***	****		
				® 东都电子 DONGDU ELECTRONICS	
				MODEL: TACT SWITCHES	
				PART NO: DDU-1145S	
				UNIT :mm SCALE:1:1 	
				REV: A PAGE:1/1	