

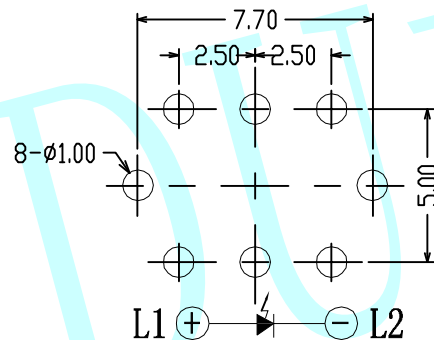
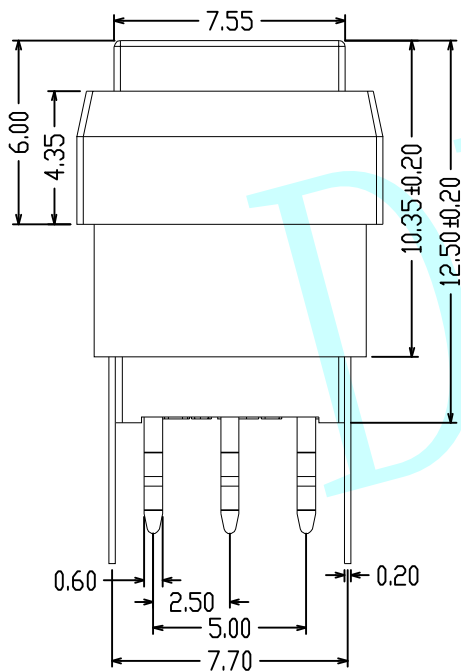
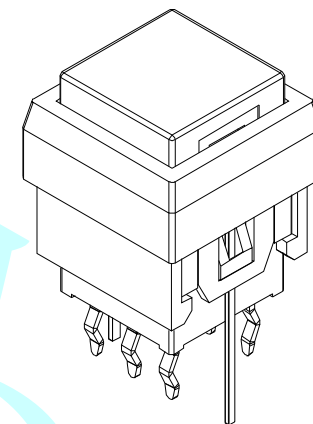
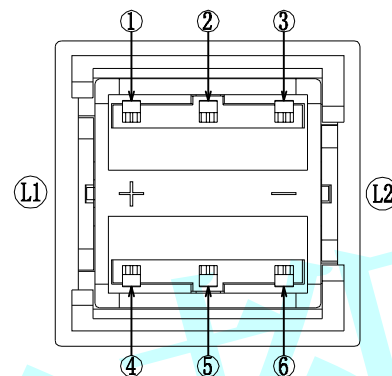
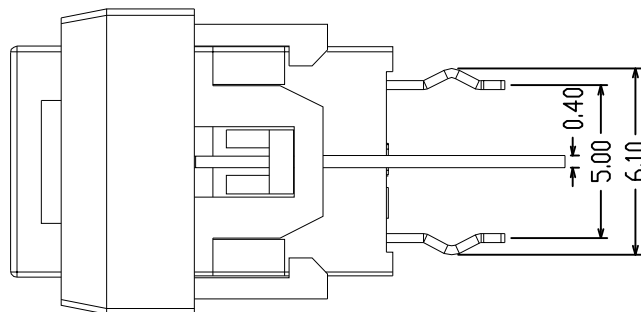


ROHS

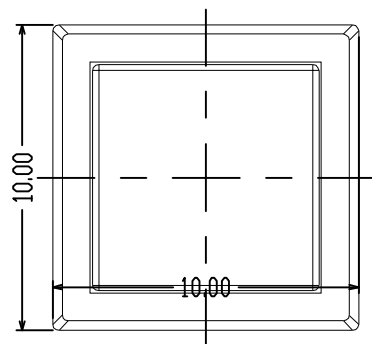

PCB LAYOUT



Circuit Diagram

NOTES:

1. Rating: 12V DC 50mA
2. Contact Resistance: 100mΩ Max
3. Insulation resistance: 100MΩ Min
4. Dielectric Strength: 250V AC (50/60HZ) FOR 1Min
5. Life test: 10,000 Cycles
6. Operating temperature range: -25℃~+80℃

White(白色)		DC5V	20mA	20mA	3.0V	3.6V
Red(红色)		DC5V	20mA	20mA	1.7V	2.4V
Blue(蓝色)		DC5V	20mA	20mA	3.0V	3.6V
Green(普绿)		DC5V	20mA	20mA	1.9V	2.4V

2	Push to lock (自锁)	Yellow(黄色)	DC5V	20mA	20mA	1.9V	2.4V
1	Push no lock (无锁)	Orange(橙色)	DC5V	20mA	20mA	1.9V	2.4V
No.	Operating Type	LED COLOUR (LED颜色)	VR	IF	Recommended Operating	Nom	Ma

APPROVALS		DATE	http://www.dongdudz.com		 东都电子 DONGDU ELECTRONICS		
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:			
CHECKED:	***	****	30≥	±0.30			
APPOVALS:	***	****	10~30	±0.20			
			5~10	±0.15	±2°		
			≤5	±0.10			
					MODEL:	LED Tact Switch	
					PART NO:	DDU-1536	
					UNIT :mm	SCALE:1:1	
					REV:	A	PAGE:1/1