

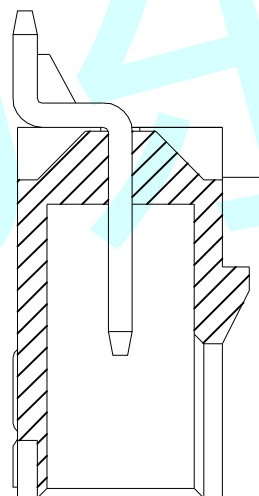
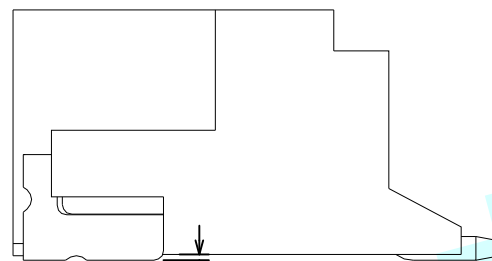
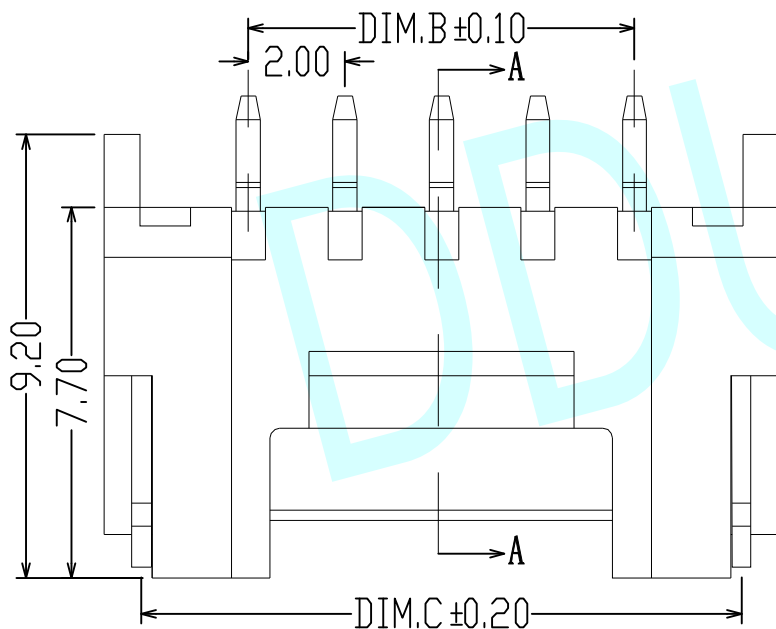
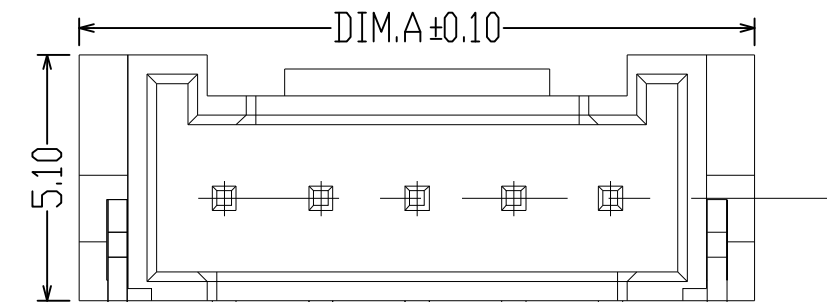


ROHS

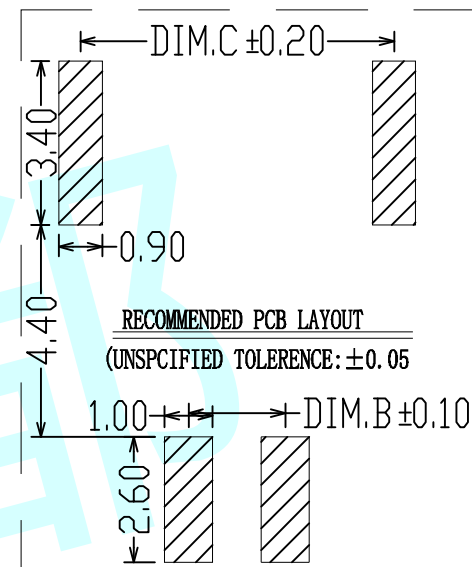

A-A



RECOMMENDED PCB LAYOUT  
(UNSPECIFIED TOLERANCE: ±0.05)

|      |        |        |        |
|------|--------|--------|--------|
| 14   | 32.00  | 26.00  | 30.50  |
| 13   | 30.00  | 24.00  | 28.50  |
| 12   | 28.00  | 22.00  | 26.50  |
| 11   | 26.00  | 20.00  | 24.50  |
| 10   | 24.00  | 18.00  | 22.50  |
| 9    | 22.00  | 16.00  | 20.50  |
| 8    | 20.00  | 14.00  | 18.50  |
| 7    | 18.00  | 12.00  | 16.50  |
| 6    | 16.00  | 10.00  | 14.50  |
| 5    | 14.00  | 8.00   | 12.50  |
| 4    | 12.00  | 6.00   | 10.50  |
| 3    | 10.00  | 4.00   | 8.50   |
| 2    | 8.00   | 2.00   | 6.50   |
| POS. | DIM. A | DIM. B | DIM. C |

|            |     |            |            |                          |       |          |
|------------|-----|------------|------------|--------------------------|-------|----------|
| APPROVALS  |     | DATE       |            | https://www.dongdudz.com |       |          |
| DRAW:      | ZRD | 2017.07.08 | TOLERANCE: |                          | ANGLE | MATERIAL |
| CHECKED:   | *** | ***        | 30>        | ±0.3                     | ±0.2° | ***      |
|            |     |            | 10~30      | ±0.2                     |       |          |
|            |     |            | 5~10       | ±0.15                    |       |          |
|            |     |            | ≤          | ±0.10                    |       |          |
| APPROVALS: | *** | ***        |            |                          |       |          |

|                     |            |
|---------------------|------------|
| DDU 东都              |            |
| ELECTRONICS CO.,LTD |            |
| TITLE               | Connector  |
| PART NO             | ***        |
| UNIT mm             | SCALE:1:1  |
| DRAWING NO.         | SHEET: 1/1 |
| REVA                |            |