

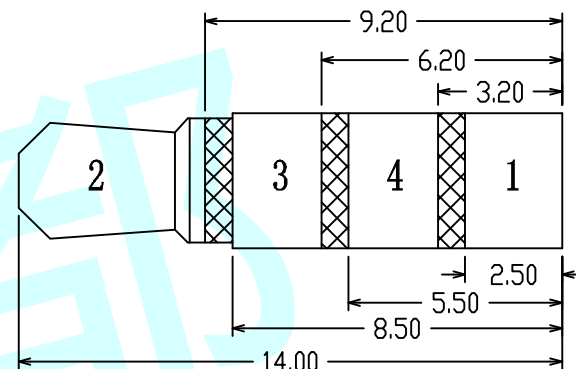
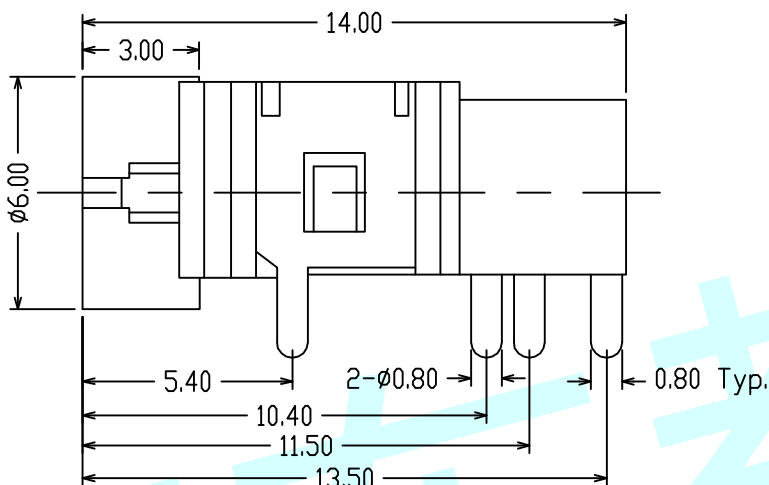


ROHS

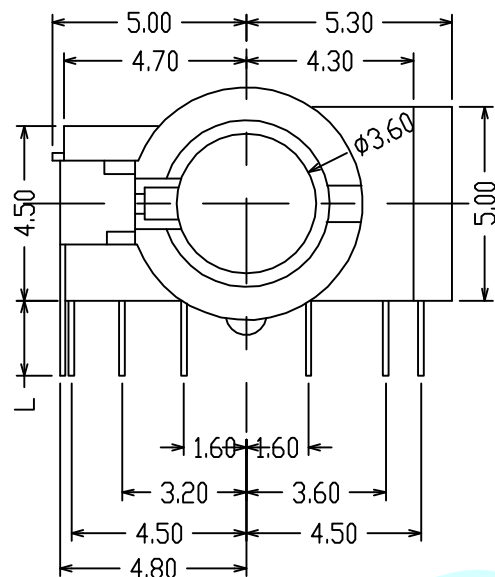


NOTE:

1. Rating: 0.5A 30V DC
2. Contact Resistance: 100mΩ Max
3. Operating Temperature: -20°C ~ 70°C
4. Operating Force: 3-20N
5. Operating Life: 5,000 Cycles

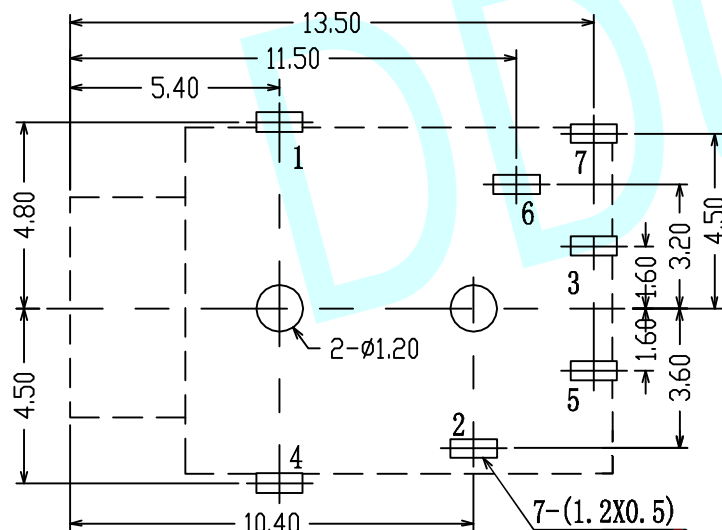

PCB Layout (Copper-Sided View)



Schematic

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:		
CHECKED:	***	****	30≥	±0.30		
APPOVALS:	***	****	10~30	±0.20		
			5~10	±0.15		
			≤5	±0.10	±2°	
					MODEL:	PHONE JACKS
					PART NO:	PJ-273
					UNIT :mm	SCALE:1:1
					REV:	A
					PAGE:1/1	