

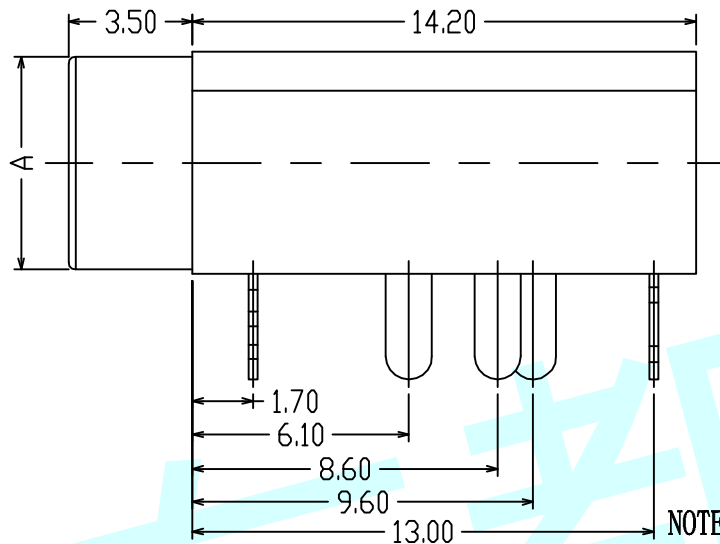


ROHS

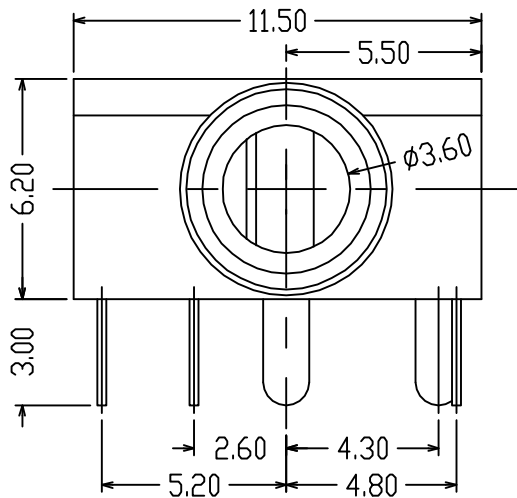


NOTE:

1. Rating: 0.5A 30V DC
2. Contact Resistance: 100mΩ Max
3. Operating Temperature: -20℃~70℃
4. Operating Force: 3-20N
5. Operating Life: 5,000 Cycles

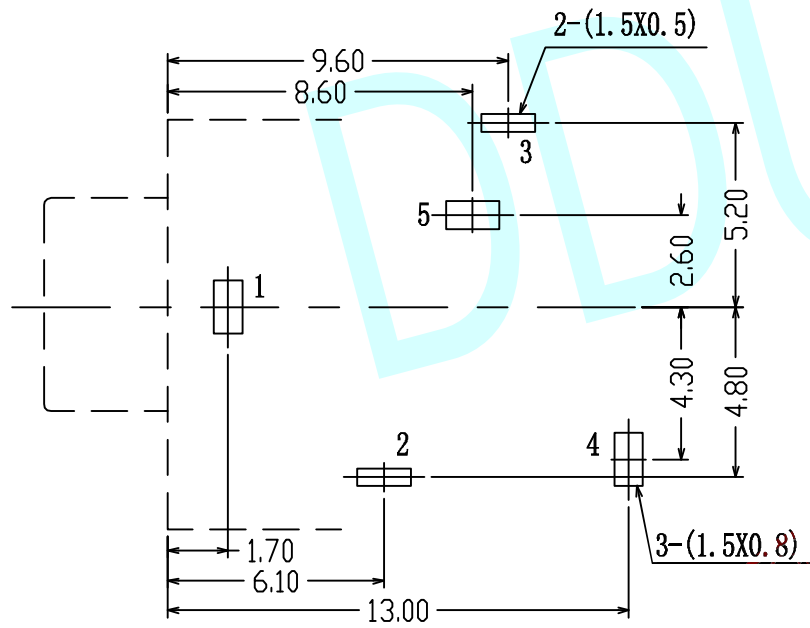

PCB Layout (Copper-Sided View)

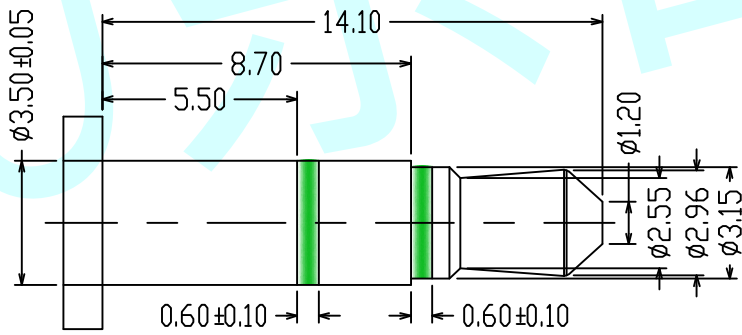

Matching Plug

| Schematic |          |          |
|-----------|----------|----------|
| PJ-264-1  | PJ-264-2 | PJ-264-3 |
| PJ-264-4  | PJ-264-5 | A        |
| ø6.00     |          |          |
| M6XP0.5   |          |          |

| APPROVALS |     | DATE      | http://www.dongdudz.com |        |
|-----------|-----|-----------|-------------------------|--------|
| DRAW:     | ZRD | 2017-12-6 | TOLERANCE:              | ANGLE: |
| CHECKED:  | *** | ****      | 30≥                     | ±0.30  |
| APPOVALS: | *** | ****      | 10~30                   | ±0.20  |
|           |     |           | 5~10                    | ±0.15  |
|           |     |           | ≤5                      | ±0.10  |

|          |             |          |
|----------|-------------|----------|
| MODL:    | PHONE JACKS |          |
| PART NO: | PJ-264      |          |
| UNIT :mm | SCALE:1:1   | ☞        |
| REV:     | A           | PAGE:1/1 |



MODEL: PHONE JACKS  
PART NO: PJ-264  
UNIT :mm SCALE:1:1  
REV: A PAGE:1/1