
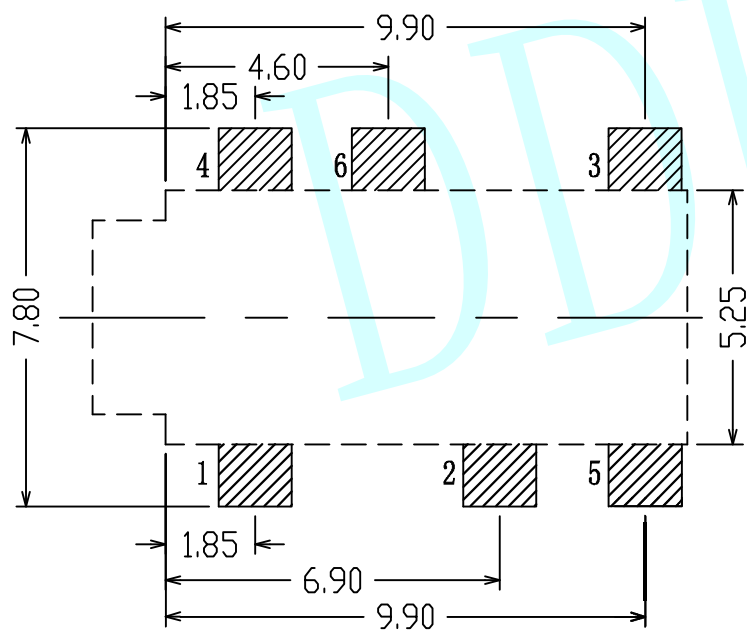
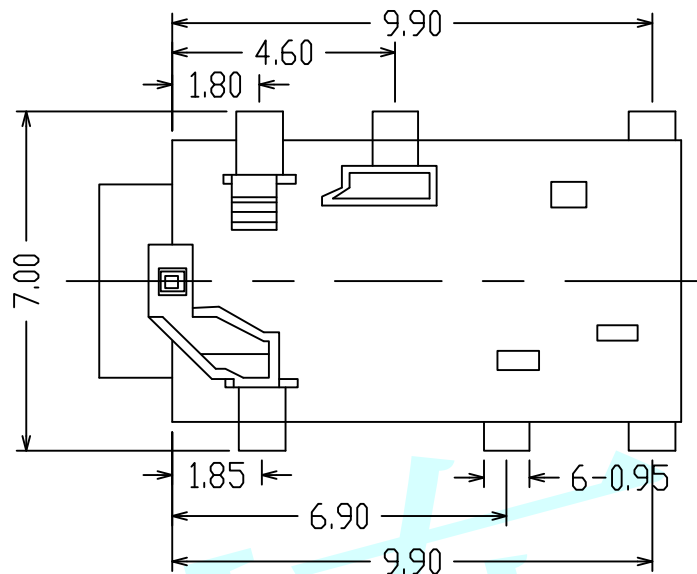


ROHS

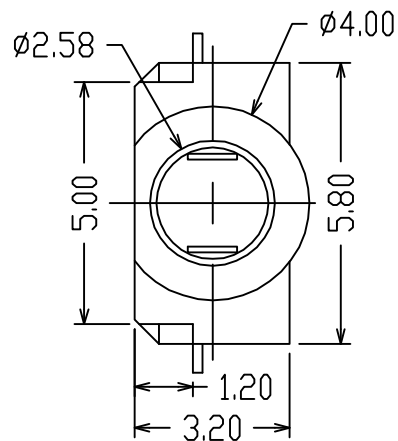


PCB Layout (Copper-Sided View)

NOTES:


1. Rating :0.5A 30V DC
2. Contact Resistance :100mΩ Max
3. Operating Temperature:-20℃~+70℃
4. Operating Force:3-20N
5. Operating Life:5,000 Cycles

Schematic


PJ-258




PJ-258-A



PJ-258-B



PJ-258-C



APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS		
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:		
CHECKED:	***	****	30≥	±0.30	±2°		
			10~30	±0.20			
APPOVALS:	***	****	5~10	±0.15			
			≤5	±0.10			
MODEL:		PHONE JACKS					
PART NO:		PJ-258					
UNIT :mm		SCALE:1:1					
REV:		A		PAGE:1/1			