


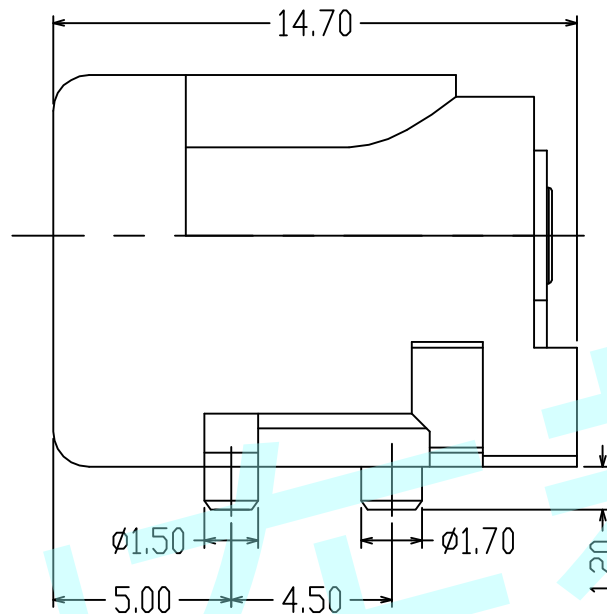


ROHS

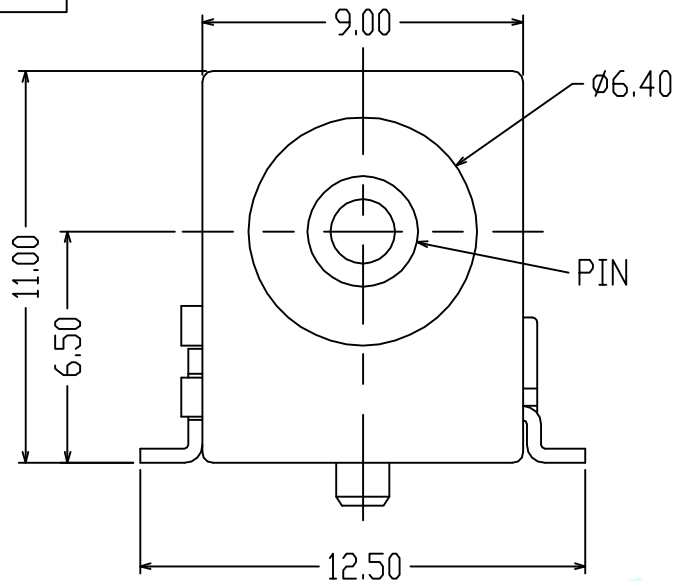


CIRCUIT DIAGRAM


CIRCUIT DIAGRAM

NOTES:

1. Rating: 0.5A 30V DC
2. Contact Resistance: 100mΩ Max
3. Operating temperature: -20°C~70°C
4. Operating force: 3-20N
5. Operating Life: 5,000 cycles

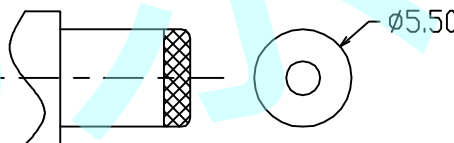

DC MATE PLUG

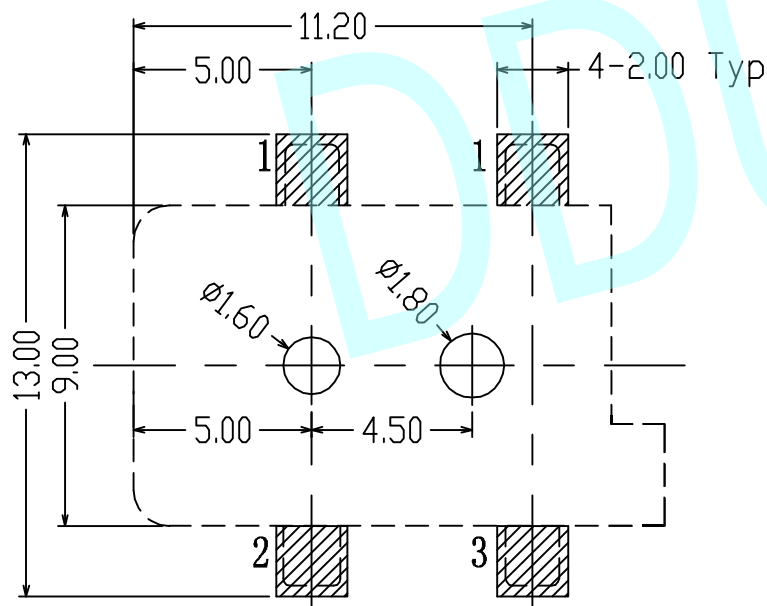

PCB Layout (Pattern Side)

		PIN		ø2.00		ø2.50	
APPROVALS		DATE		http://www.dongdudz.com			
DRAW:	ZRD	2017-12-6		TOLERANCE:		ANGLE:	
CHECKED:	***	***		30≥	±0.30	±2°	
APPROVALS:	***	***	10~30	±0.20			
			5~10	±0.15			
			≤5	±0.10			
				 ® 东都电子 DONGDU ELECTRONICS			
		MODEL:		DC POWER JACK			
		PART NO:		DC-050			
		UNIT :mm		SCALE:1:1			
		REV:		A		PAGE:1/1	