

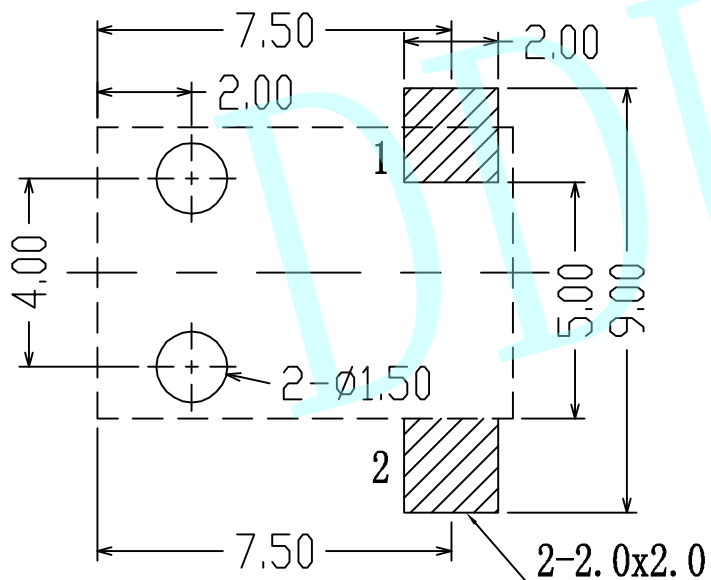
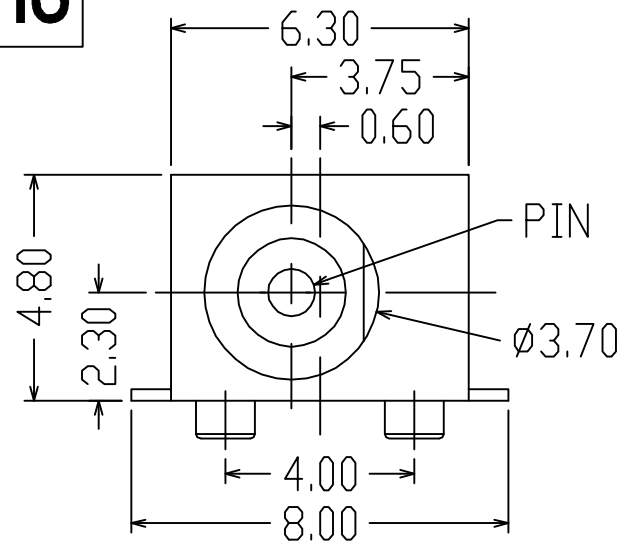




ROHS



PCB Layout (Copper-Side View)

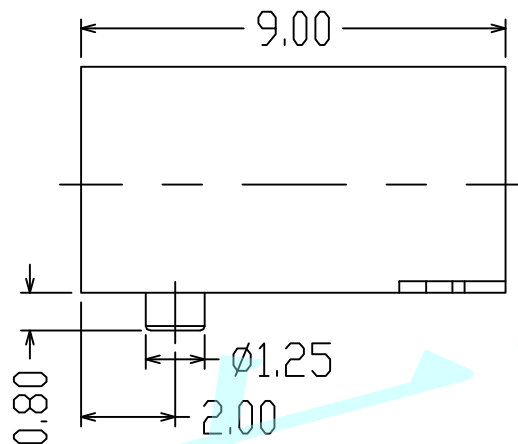

CIRCUIT DIAGRAM

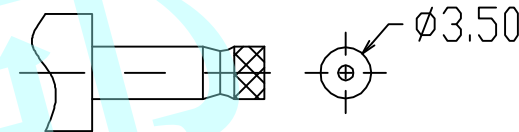

DC MATE PLUG

NOTES:

1. Rating: 0.5A 30V DC
2. Contact Resistance: 100mΩ Max
3. Operating temperature: -20°C ~ 70°C
4. Operating force: 3-20N
5. Operating Life: 5,000 cycles

		PIN		ø1.00		ø1.30	
APPROVALS		DATE	http://www.dongdudz.com				
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:	® 东都电子 DONGDU ELECTRONICS	
CHECKED:	***	***	30≥	±0.30	±2°		
			10~30	±0.20			
			5~10	±0.15			
APPROVALS:	***	***	≤5	±0.10			
		MODEL: DC POWER JACK					
		PART NO: DC-047					
		UNIT :mm SCALE:1:1				 PAGE:1/1	
		REV: A				PAGE:1/1	