



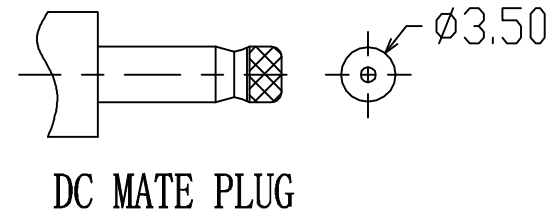
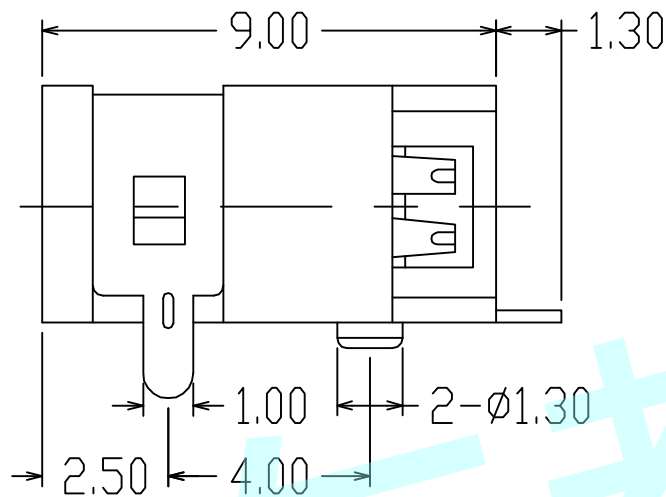


ROHS

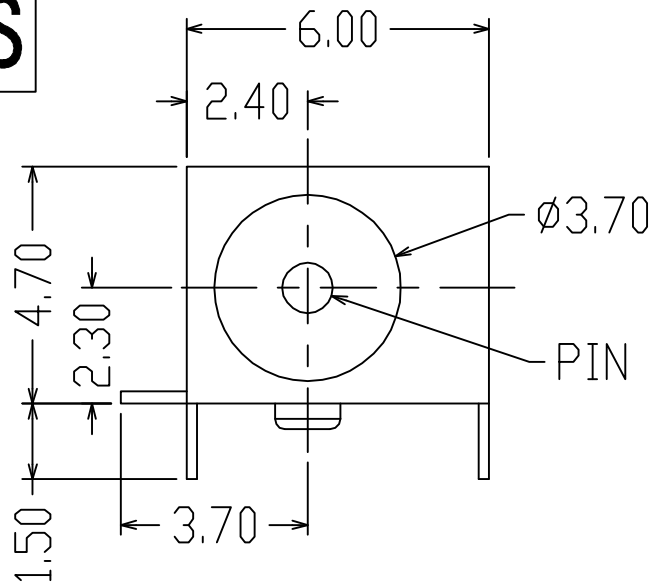

NOTES:

1. Rating: 0.5A 30V DC
2. Contact Resistance: 100mΩ Max
3. Operating temperature: -20℃~70℃
4. Operating force: 3-20N
5. Operating Life: 5,000 cycles

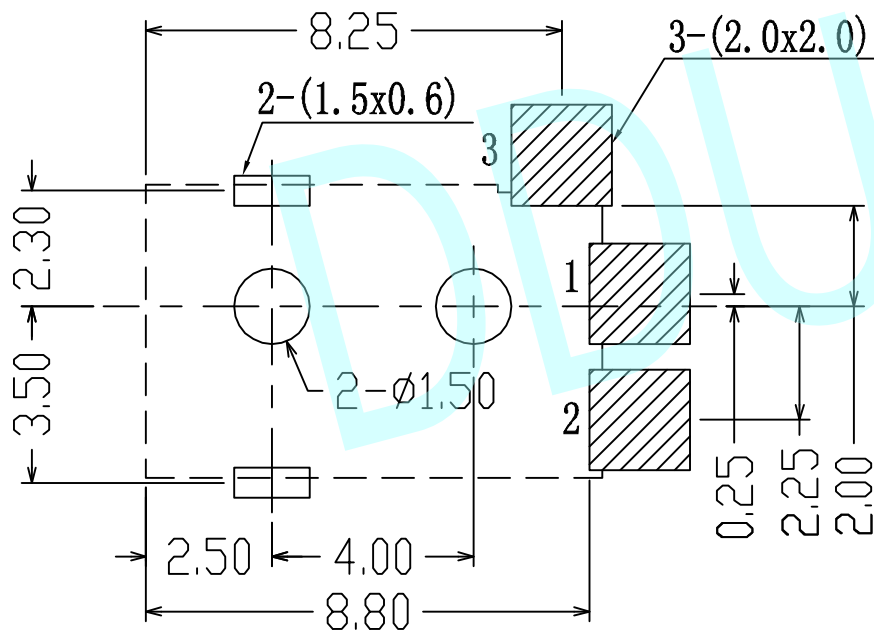

PCB Layout (Copper-Side View)

PIN	ø1.00	ø1.30
-----	-------	-------

APPROVALS		DATE		http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS				
DRAW:	ZRD	2017-12-6		TOLERANCE:					ANGLE:	
CHECKED:	***	***	30≥		±0.30				±2°	
			10~30		±0.20					
			5~10		±0.15					
APPOVALS:	***	***	≤5		±0.10					
MODEL:		DC POWER JACK								
PART NO:		DC-045A								
UNIT :mm		SCALE:1:1								
REV:		A		PAGE:1/1						