
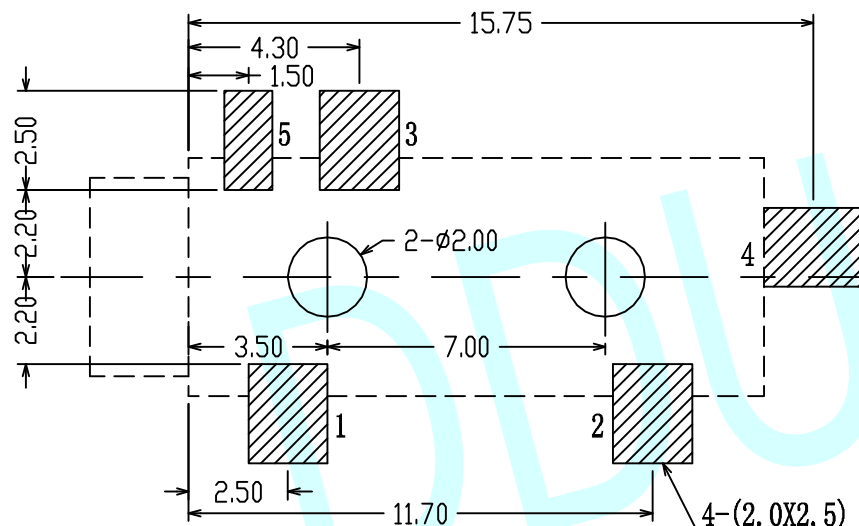
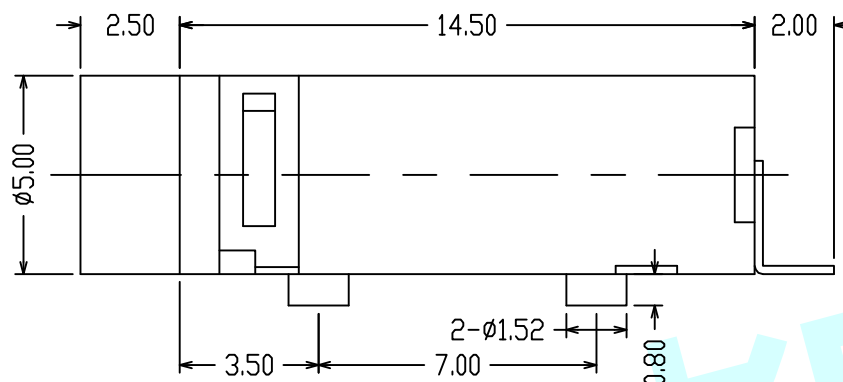



ROHS

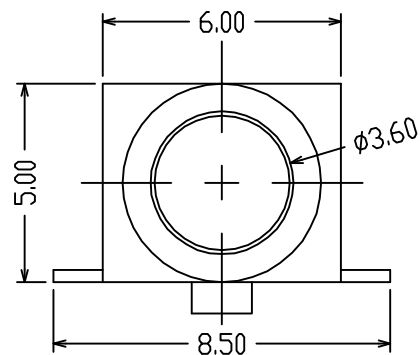


PCB Layout (Copper-Sided View)

Schematic


PJ-328




PJ-328-A




PJ-328-B



PJ-328-C



PJ-328-D



NOTE:

1. Rating: 0.5A 30V DC
2. Contact Resistance: 100mΩ Max
3. Operating Temperature: -20°C~70°C
4. Operating Force: 3-20N
5. Operating Life: 5,000 Cycles

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS			
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:			
CHECKED:	***	****	30≥	±0.30	±2°	MODEL:	PHONE JACKS	
			10~30	±0.20		PART NO:	PJ-328	
			5~10	±0.15		UNIT :mm	SCALE:1:1	
APPROVALS:	***	****	≤5	±0.10		REV:	A	PAGE:1/1