
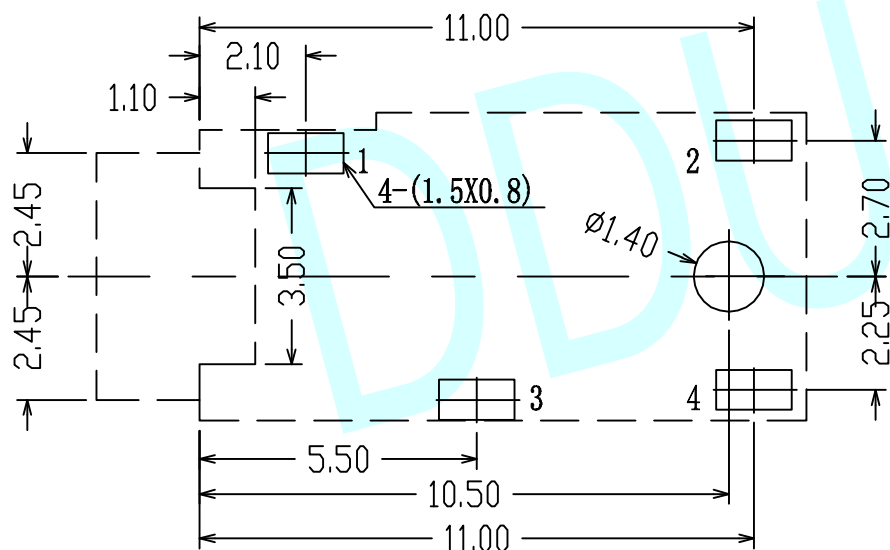
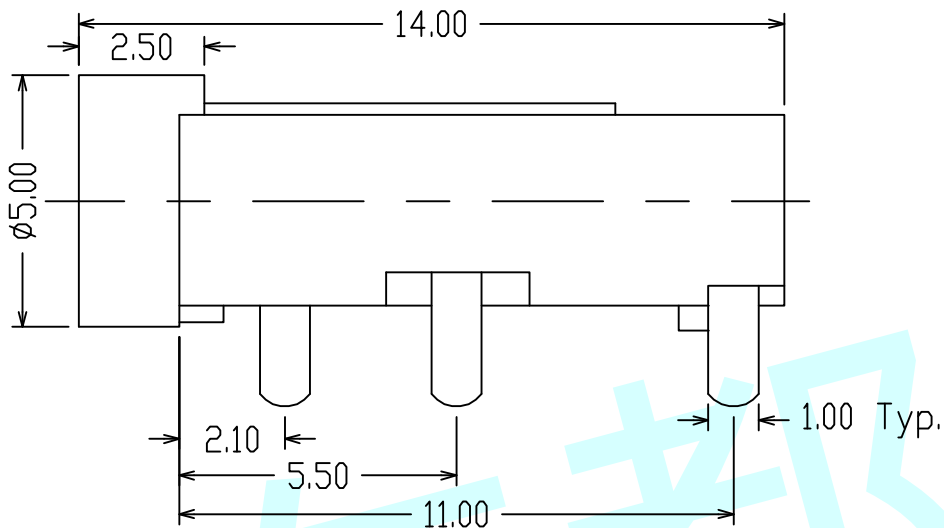


ROHS

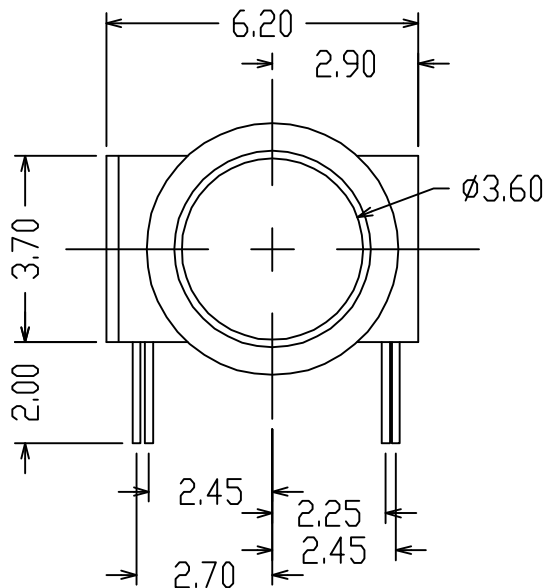


PCB Layout (Copper-Sided View)

NOTE:


1. Rating: 0.5A 30V DC
2. Contact Resistance: 100mΩ Max
3. Operating Temperature: -20°C ~ 70°C
4. Operating Force: 3-20N
5. Operating Life: 5,000 Cycles

Schematic

PJ-274-A



PJ-274-B



APPROVALS		DATE	http://www.dongdudz.com			 ® 东都电子 DONGDU ELECTRONICS
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:	
CHECKED:	***	****	30≥	±0.30	±2°	
			10~30	±0.20		
			5~10	±0.15		
APPOVALS:	***	****	≤5	±0.10		
MODEL:		PHONE JACKS				
PART NO:		PJ-274				
UNIT :mm		SCALE:1:1				
REV:		A		PAGE:1/1		