

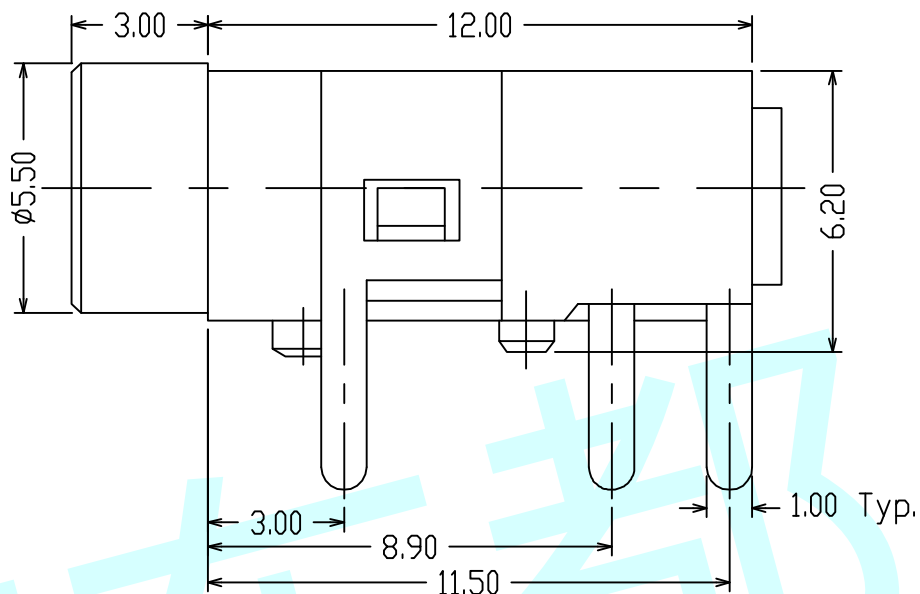


ROHS

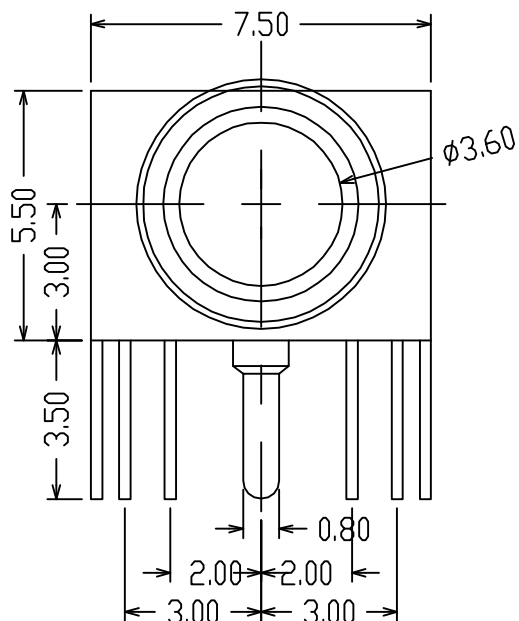


NOTE:

1. Rating: 0.5A 30V DC
2. Contact Resistance: 100mΩ Max
3. Operating Temperature: -20℃~70℃
4. Operating Force: 3-20N
5. Operating Life: 5,000 Cycles

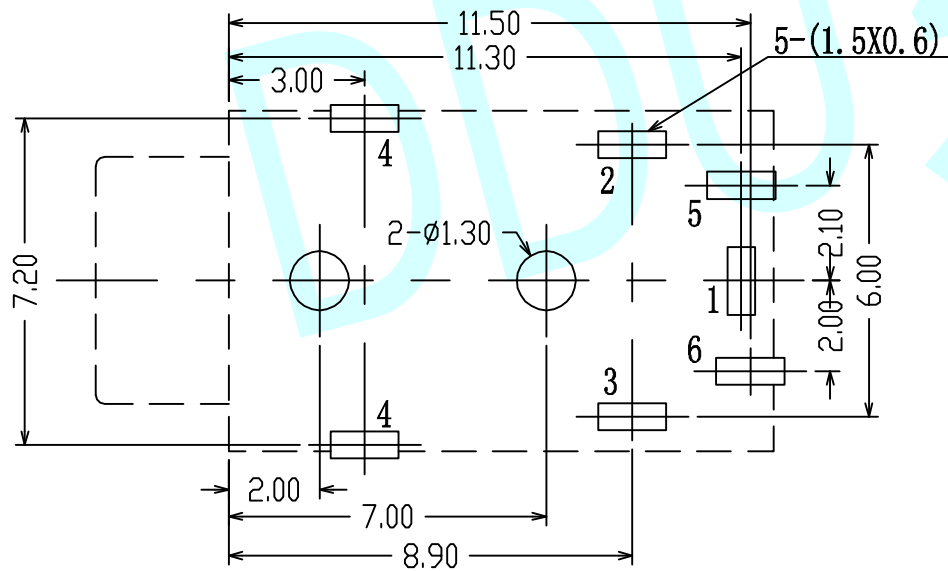

PCB Layout (Copper-Sided View)

Schematic

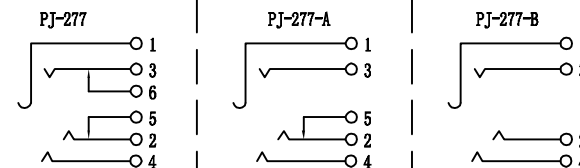

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS				
DRAW:	ZRD	2017-12-6	TOLERANCE:					ANGLE:	
CHECKED:	***	****	30≥	±0.30				±2°	
			10~30	±0.20					
			5~10	±0.15					
APPOVALS:	***	****	≤5	±0.10					
			MODEL:				PHONE JACKS		
			PART NO:				PJ-277		
			UNIT :mm				SCALE:1:1		
			REV:		A		PAGE:1/1		