
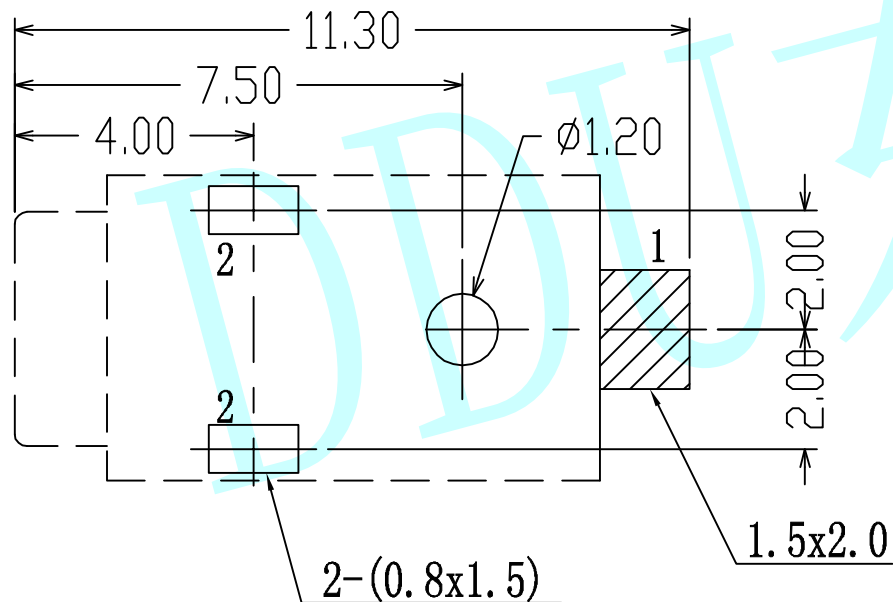
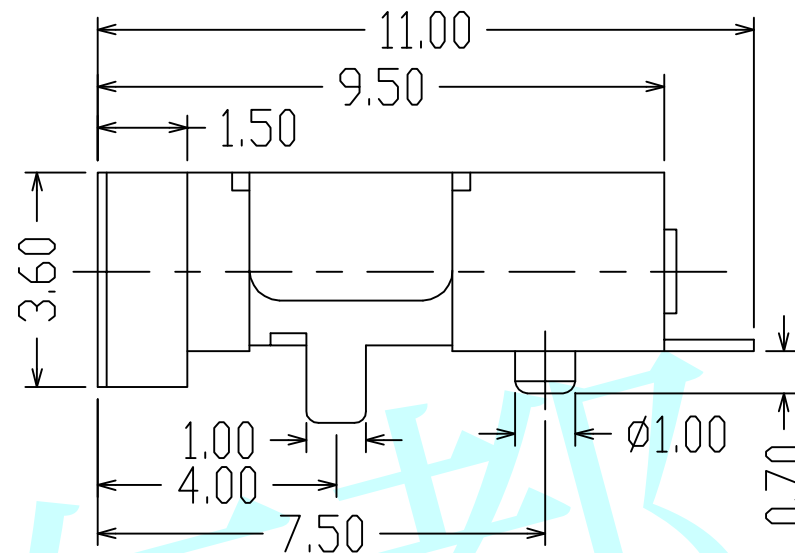



ROHS

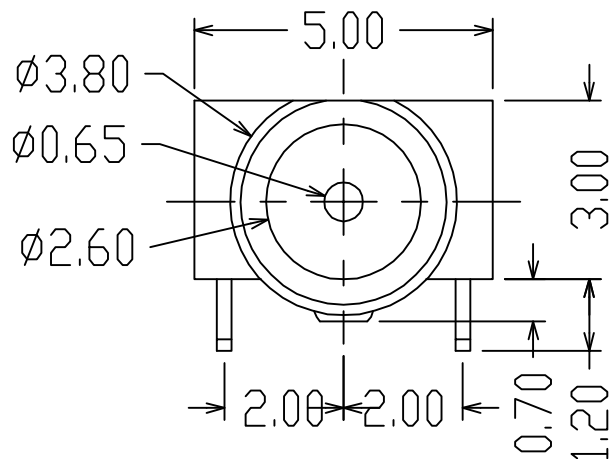

PCB Layout Top View

NOTES:

1. Rating: 0.5A 30V DC
2. Contact Resistance: 100mΩ Max
3. Operating temperature: -20°C ~ 70°C
4. Operating force: 3-20N
5. Operating Life: 5,000 cycles



CIRCUIT DIAGRAM

APPROVALS		DATE	http://www.dongdudz.com		 东都电子	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:	DONGDU ELECTRONICS	
CHECKED:	***	***	30≥	±0.30	MODEL:	DC POWER JACK
APPOVALS:	***	***	10~30	±0.20	PART NO:	DC-055
			5~10	±0.15	UNIT :mm	SCALE:1:1
			≤5	±0.10	REV:	A
						PAGE:1/1