





ROHS

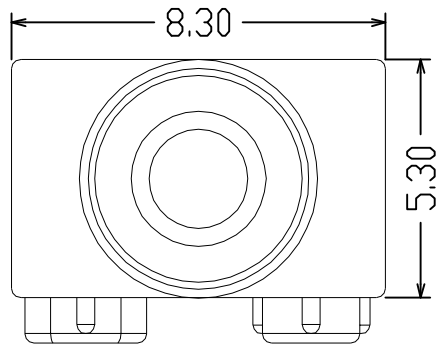

Circuit Diagram

NOTE:

1. Rating: 0.1A 12V DC
2. Storage temperature: $-40^{\circ}\text{C}\sim+80^{\circ}\text{C}$
3. Service temperature: $-10^{\circ}\text{C}\sim+60^{\circ}\text{C}$
4. Insulation resistance: $100\text{M}\Omega$ MIN
5. Withstand voltage: 500V AC(50~60Hz)/1minute
6. Waterproof grade: IP67
7. Mechanical life: MIN 300,000 CYCLES
8. Operating force: $120\pm 30\text{gf}$
9. (自由位置) FP:7.80mm MAX
10. (动作位置) OP:7.10mm $\pm 0.30\text{mm}$
11. (全行程位置) TTP:5.50mm MAX

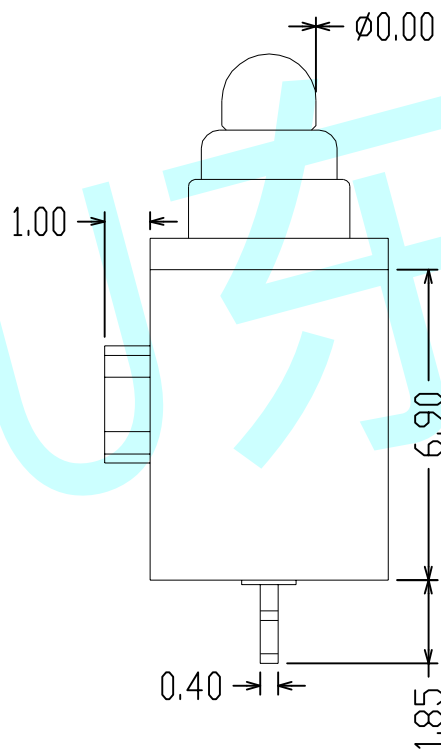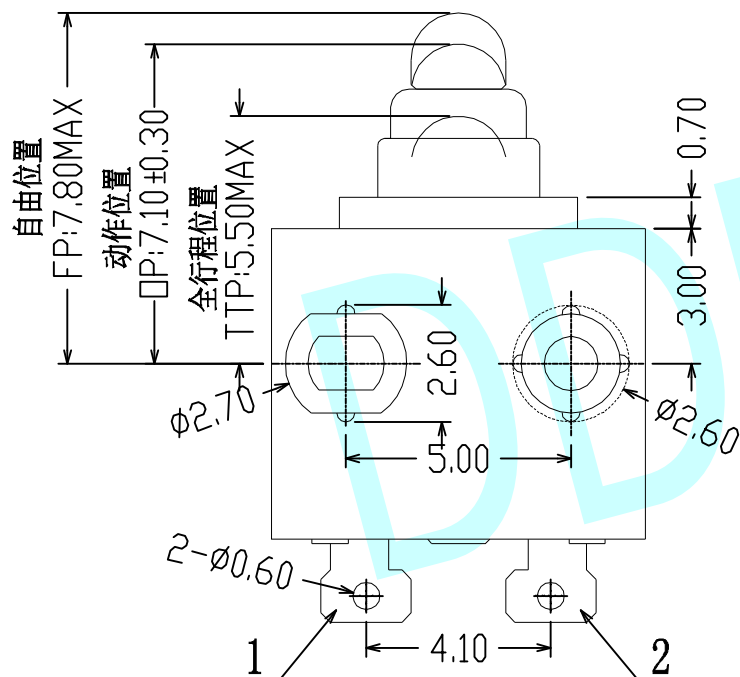

7	防水套	1	硅胶	
6	弹 簧	1	不锈钢丝 $\phi=0.15$	
5	接线片	1	黄铜 T=0.40	镀 银
4	基 座	1	PPA	黑 色
3	动簧片	1	覆银铜 T=0.07	镀 银
2	塑 盖	1	PPA	黑 色
1	按 钮	1	PPA	黑 色
序号	名 称	数量	材 料	备 注

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:	
CHECKED:	***	****	30 $\geq$	± 0.30	
			10~30	± 0.20	
			5~10	± 0.15	
APPOVALS:	***	****	≤ 5	± 0.10	
			$\pm 2^{\circ}$		MODEL: MICRO SWITCHS
					PART NO: DDU-1785-A
					UNIT :mm SCALE:1:1
					REV: A PAGE:1/1