
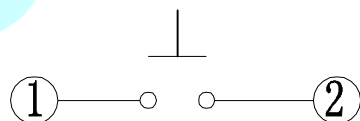

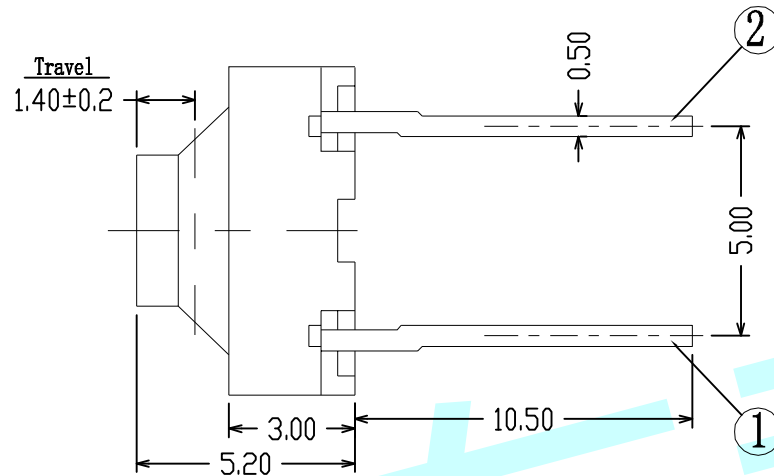



ROHS

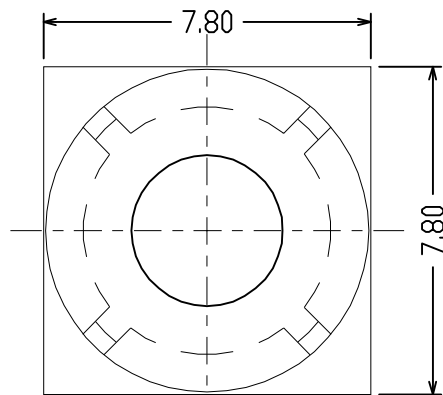

Circuit Diagram

The Mai Thchnology Performance:

1. Rate voltage. current: 50mA DC 12V
2. Contact resistance: $\leq 100m\Omega$
3. Travel: $1.40 \pm 0.20mm$
4. Insulated resistance: $\geq 100M\Omega$
5. Dielectric strength: $\geq 250V$ AC/1min
6. Endurance: 100, 000 cycles

		Stergth	90±30		130±30		180±30		250±30	
APPROVALS			DATE		http://www.dongdudz.com					
DRAW:	ZRD	2017-12-6		TOLERANCE:		ANGLE:				
CHECKED:	***	****		30≥		±0.30		±2°		
				10~30		±0.20				
				5~10		±0.15				
				≤5		±0.10				
APPOVALS:		***	****							
					® 东都电子 DONGDU ELECTRONICS					
					MODEL:		TACT SWITCHES			
					PART NO:		DDU-1171			
					UNIT :mm		SCALE:1:1			
					REV:		A		PAGE:1/1	