

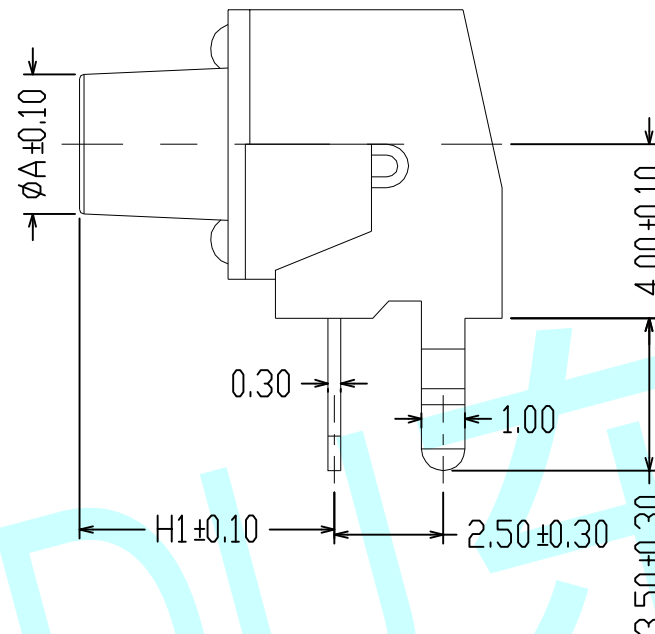


ROHS

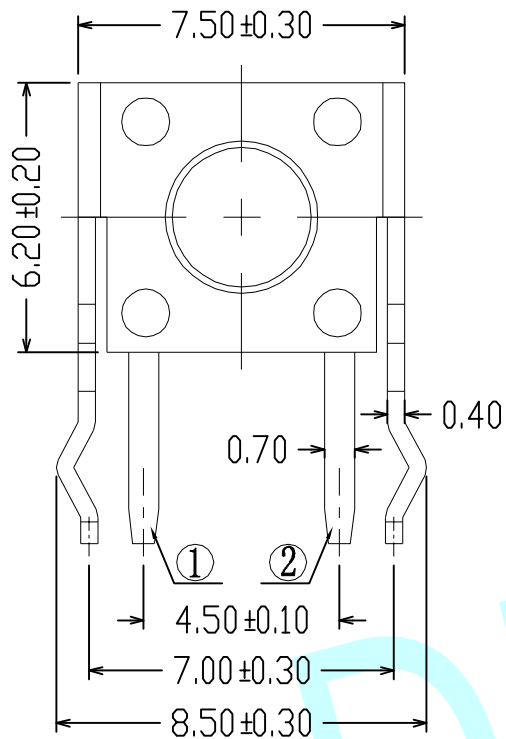

NOTES :

1. Rating :DC 12V 50mA.
2. Contact resistance: $\leq 100\text{m}\Omega$
3. Insulation resistance: $\geq 100\text{M}\Omega$
4. Travelled: $0.30\pm 0.10\text{mm}$
5. Withstanding: AC 250V 50Hz 1minute
5. Life :100,000 Cycles

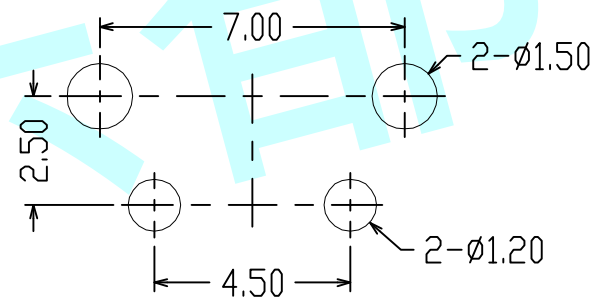

PCB LAYOUT



CIRCUIT DIAGRAM

H1	H2	ØA
3.15	4.30	3.50
3.35	4.50	3.50
3.85	5.00	3.50
4.35	5.50	3.40
4.85	6.00	3.40
5.35	6.50	3.40
5.85	7.00	3.30
6.15	7.30	3.30
6.35	7.50	3.30
6.85	8.00	3.30
7.35	8.50	3.30
7.85	9.00	3.10
8.35	9.50	3.10
8.85	10.00	3.00
9.35	10.50	3.00
9.85	11.00	3.00
10.35	11.50	3.00
10.85	12.00	3.00
11.35	12.50	3.00
11.85	13.00	3.00
12.35	13.50	3.00
12.85	14.00	3.00
13.35	14.50	3.00
13.85	15.00	3.00
14.85	16.00	3.00
15.15	16.30	3.00
15.85	17.00	3.00

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS	
DRAW:	ZRD	2017-12-6	TOLERANCE:			ANGLE:
CHECKED:	***	****	30≥	±0.30		±2°
			10~30	±0.20		
			5~10	±0.15		
APPROVALS:	***	****	≤5	±0.10		

MODEL:	TACT SWITCHES	
PART NO:	DDU-2024	
UNIT :mm	SCALE:1:1	
REV:	A	PAGE:1/1